

# Suppression of instabilities by intra-bunch feedback: status, experiments at SPS, future plans

J.D. Fox<sup>1</sup>, J. Dusatko<sup>2</sup>, C. Rivetta<sup>2</sup>, O. Turgut<sup>1</sup>  
H. Bartosik<sup>3</sup>, E. Bjorsvik<sup>3</sup>, W. Hofle<sup>3</sup>, K. Li<sup>3</sup>, E. Metral<sup>3</sup>, B. Salvant<sup>3</sup>,  
T. Levens<sup>3</sup>

<sup>1</sup>Applied Physics Department, Stanford University




<sup>2</sup>SLAC

<sup>3</sup>BE-ABP-HSC Groups, CERN




# Intra-Bunch Impedances, Instabilities

- Transverse instabilities - beam loss, emittance increase
  - Impedance-driven Instabilities - including TMCI
  - Ion or Electron-cloud disturbances
  - Instability control - goal of higher currents, luminosity
- Feedback
  - a kind of "programmable impedance"
  - a means to damp or excite beam motion
  - a powerful beam diagnostic
- Wideband - capability to address many ( all?) beam modes
  - Coupled-bunch instabilities -bandwidth consistent with bunch spacing (500MHz)
  - Intra-bunch motion - bandwidth consistent with bunch length (1-2 GHz or ?)
- Intra-bunch wideband feedback - examples from JPARC and SPS





# Diagnostics for a dynamic system - open/closed loop

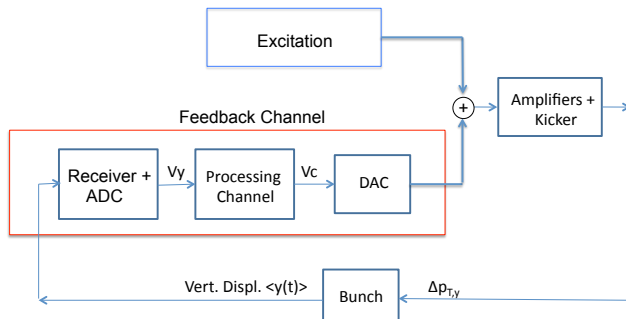

- We want to **study stable or unstable beams** and understand impact of feedback
  - System isn't steady state, tune and dynamics vary
- We can **vary the feedback gain vs. time**, study variation in beam motion vs time
- We can **drive the beam with an external signal**, observe response to our drive
  - Excite with chirps that can cross multiple frequencies of interest
- Use programmable features, and data memory, within the feedback system to excite and record beam motion
- excellent frequency resolution, measurement of modal amplitudes, structures from long sequences, high sampling rates (narrowband resolution from processing gain)


# Intra-Bunch Feedback at JPARC - horizontal plane

THO3AB01

Proceedings of HB2014, East-Lansing, MI, USA

## PERFORMANCE OF TRANSVERSE INTRA-BUNCH FEEDBACK SYSTEM AT J-PARC MR


Y. H. Chin, T. Obina, M. Okada, M. Tobiyama, T. Toyama, KEK, Ibaraki, Japan  
K. Nakamura, Kyoto University, Kyoto, Japan

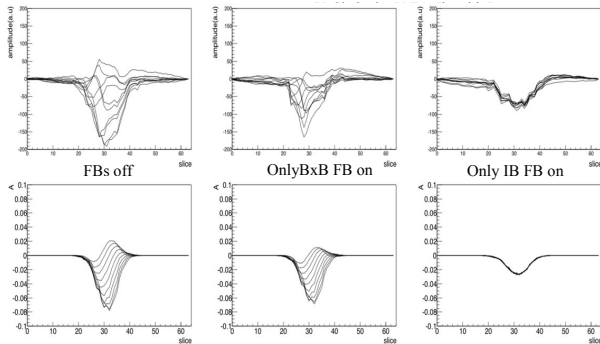

- Long Bunch 150 - 200 ns
- 100 MHz sampling rate, 64 samples/bunch
- diagonal FIR processing, similar to bunch by bunch systems
- tune tracking during energy ramp (sequence of FIR filters)

Figure 9: The delta signal motion around 250th turn after a perturbation kick. The top figures are for the experimental results (Left: all FBs off, Middle: only BxB FB on, Right: only intra-bunch FB on) and the bottom ones are for the simulations (Left: all FBs off, Middle: only BxB FB on, Right: only intra-bunch FB on).

# SPS - Wideband IntraBunch Demonstration system

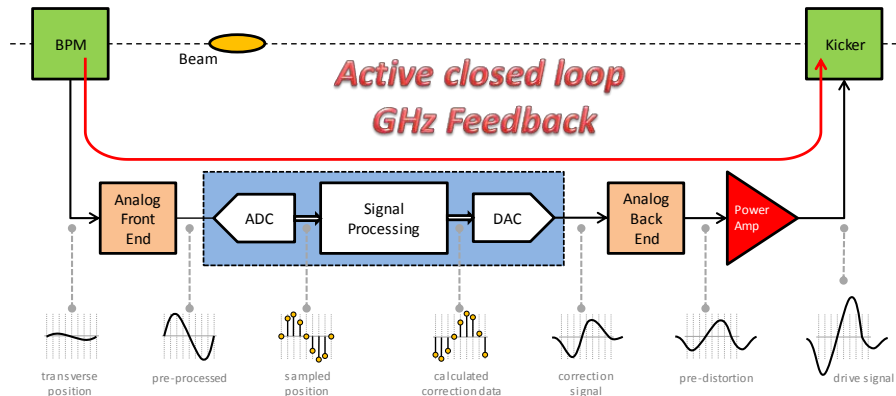


- Pickup - provides moment ( $\text{charge} \times \text{position}$ )
- Analog Front End -  $\Delta$  and  $\Sigma$
- GHz Bandwidth, equalization


- 4 - 8 GS/s DSP
- Orbit rejection, processing gain
- Tailored gain vs. phase for damping

- Back End - RF drive to power stages, equalization
- Kickers - converts RF to transverse kick
- Timing, Synchronization, Diagnostics


# SPS Demonstrator System DSP Features



- Reconfigurable 4 GS/sec. DSP platform
  - 1 GHz system bandwidth
  - GUI for operations/Control
  - 64 bunch train control, scrubbing beam control
  - 16 slice FIR control, flexible slice gains
  - On the fly filter coefficient swap
  - Feedback + Excitation mode
  - Robust Timing/Synchronization
  - Digital Output RF upconvert
- 2 500 MHz Stripline Kickers commissioned 2016
- 1 GHz Slotline kicker commissioned 2018
- 4 1 GHz 250W RF power amps in tunnel

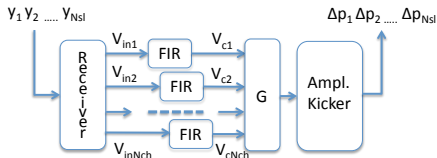


# 1 GHz Wideband Slotline kicker development

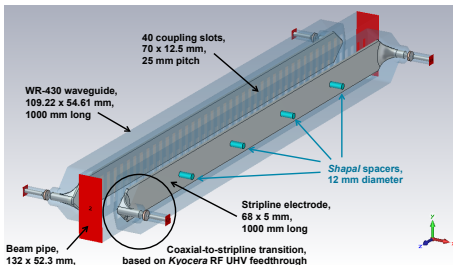


- CERN, LNF-INFN, LBL and SLAC Collaboration. Design Report SLAC-R-1037
- Similar in concept to stochastic cooling pickups, run as kicker
- **Advantage - length allows Shunt Impedance AND Bandwidth**
- J. Cesaratto, S. Verdu, M. Wendt, D. Aguilera electrical/mechanical design and HFSS optimization, installed Jan 2018, commissioned July 2018)

# Measuring the dynamic system - Modal Excitation

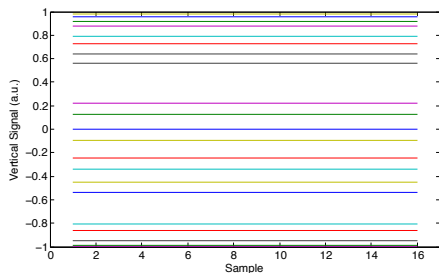



Mode zero excitation

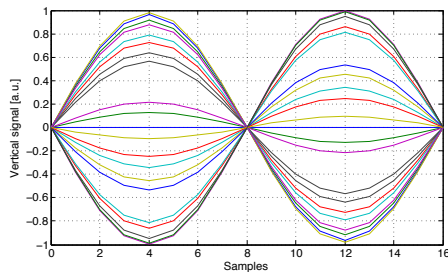

Mode 1 (head-tail) excitation





- Inside the DSP processing we can sum in an Excitation signal file
  - 16 unique samples/turn ( 4 ns duration)
  - 20,000 turn sequence, synchronized to injection
  - Spatially-shaped excites particular mode
  - Spatial Waveform is amplitude modulated at selected tune frequency
  - Chirps span range of tunes for selective excitation and spectrum analysis
- Synchronization to injection, Feedback properties also can be modulated vs. time

# Slotline Commissioning July 2018-Excitation chirps

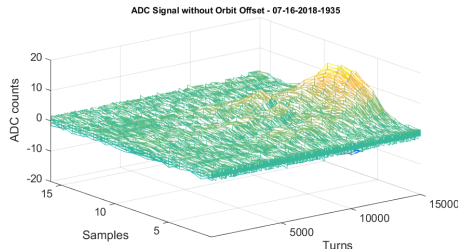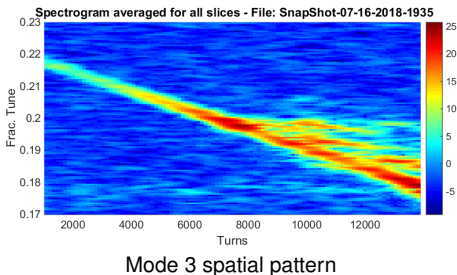

- Descending chirp crosses 4 modes
  - Surface plot shows evolution of motion
  - Mode 3  $\rightarrow$  2  $\rightarrow$  1  $\rightarrow$  0
  - Spatial Waveform is amplitude modulated at selected tune frequency
  - Little damping, modes continue to ring
- consistent timing and phasing of multiple slotline and striplines requires care
- Studies show greater bandwidth of slotline
- Initial studies July 2018 - more to do

# Slotline Commissioning -Excitation chirps

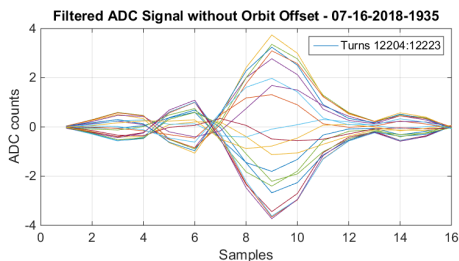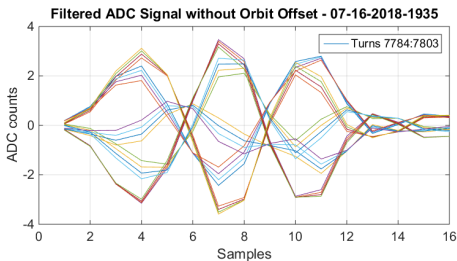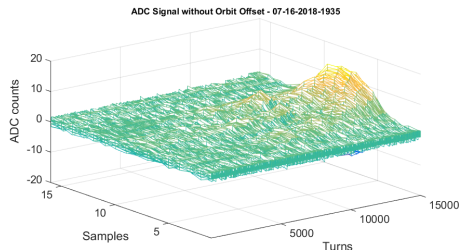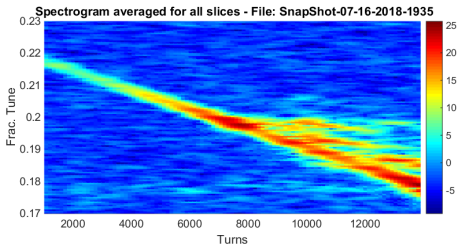





# Intra-Bunch SPS studies - Q26, Q20 and Q22 Optics

- Studies of stable, unstable beams
- Single-bunch and bunch train studies
- Driven and damped motion studies
- Study interaction with transverse dampers
- modes 0,1,2 (higher?) damping to noise floor
- use of 500 MHz striplines, (1 GHz bandwidth slotline kicker in fab pre 2018)


ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

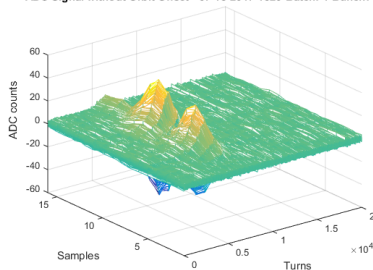

ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

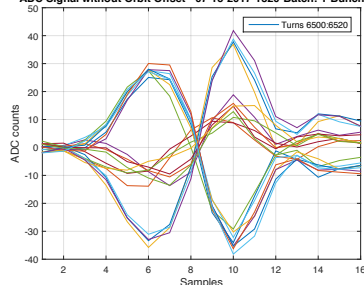


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1320

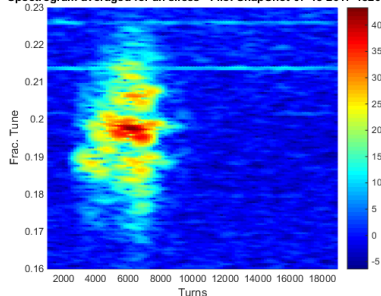


# Feedback Stabilizes Single Bunch Instability

ADC signal without Orbit Offset - Batch: 1 Bunch: 1

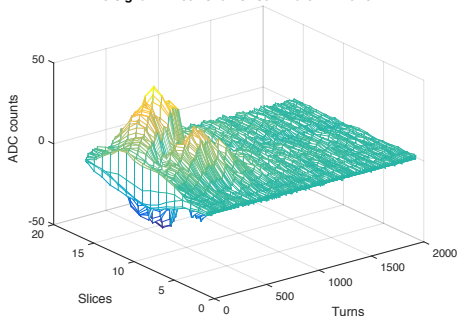

ADC signal without Orbit Offset - Batch: 1 Bunch: 1

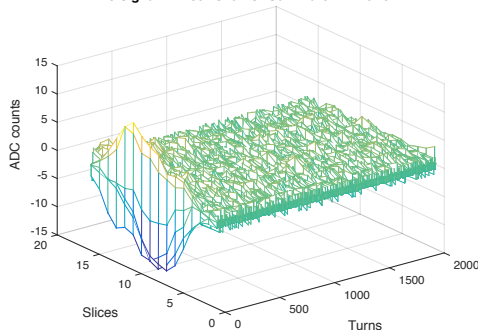

- Intensity  $2 \times 10^{11}$  with low chromaticity Q26 lattice ( special beam)
- LEFT Instability seen immediately from injection - Wideband Feedback OFF
  - Instability leads to loss of charge without feedback, roughly 400 - 800 turns
- RIGHT Instability controlled from injection - Wideband Feedback ON
  - Head-Tail instability ( intra-bunch)
- Important to understand injection transient and saturation impacts

# Single Bunch - Stabilized by feedback

- Q26 Optics, Charge  $\simeq 2.05 \times 10^{11}$  part.
- Transverse damper is ON. Wideband feedback is ON.
- TWC = 1.4MV, Chromaticity positive, tune = 0.183,  $\epsilon_y = 1.7 \mu\text{m}$ .

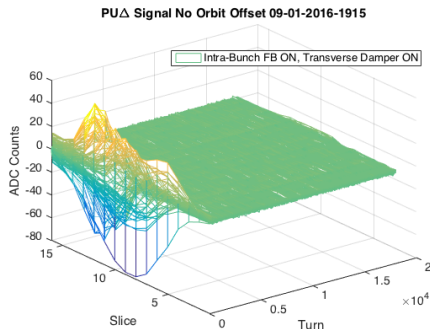


Figure: Vertical dipole motion. Small amount of charge is lost at injection.


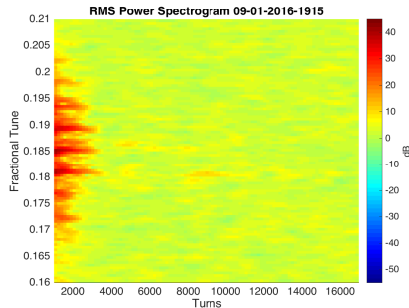



Figure: Spectrogram.

# Single Bunch - Damp - Grow transient

- Q26 Optics, similar machine-beam conditions that above
- The wideband feedback in ON during injection up to turn 8000, then it is OFF
- The beam becomes unstable after opening the feedback loop

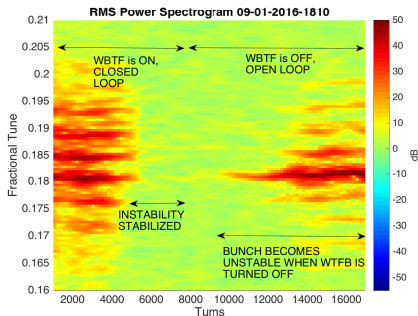


**Figure:** Spectrogram of a bunch. The wideband feedback (WBFB) is ON until turn 8000. The bunch becomes unstable after WBFB is turned OFF.


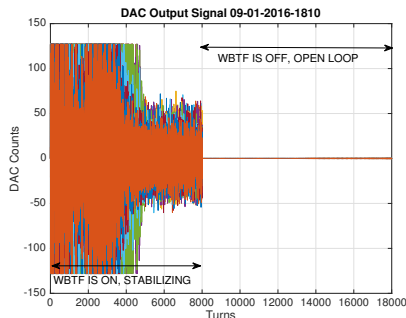


**Figure:** DAC signal (Amplifier, Kicker signals). Loop is opened at turn 8000

# Stable Q22 study - pos FB excitation, free decay

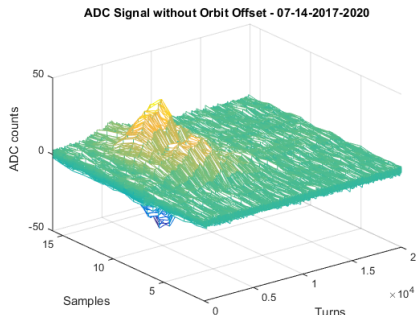


- Stable bunch is excited with positive feedback for 5000 turns -instability grows
- Pos FB SG 3 damp SG 15
- Transverse damper 2 ON 1 OFF
- unstable bunch develops mode 1 and mode 0
- Evidence of power converter noise and tune modulation

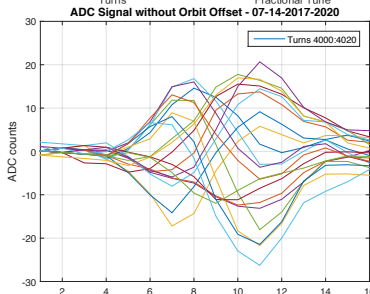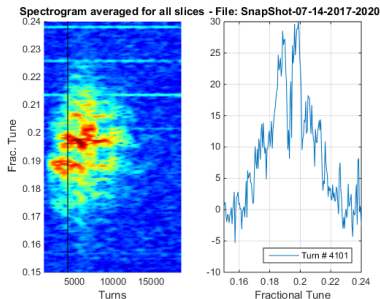


# single bunch Q22 study - pos excite, open loop decay


ADC Signal without Orbit Offset - 07-14-2017-1943

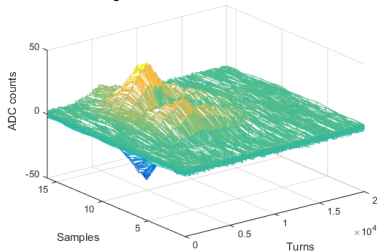


ADC Signal without Orbit Offset - 07-14-2017-1943

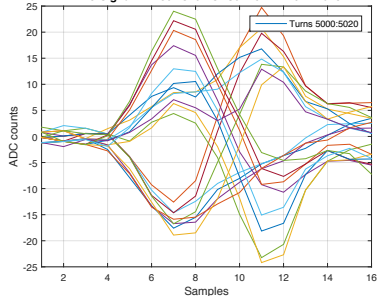

Spectrogram averaged for all slices - File: Snapshot-07-14-2017-1943

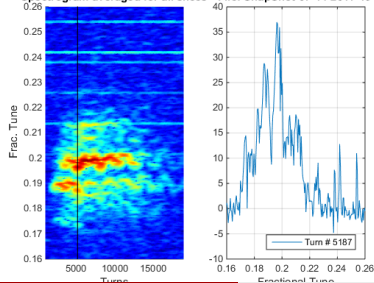


ADC Signal without Orbit Offset - 07-14-2017-1943

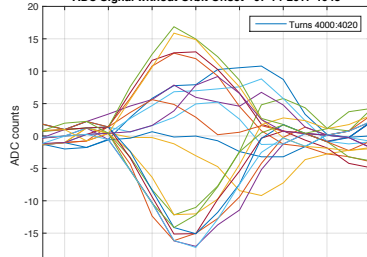


# Q22 high gain damping 7-15 1320


ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

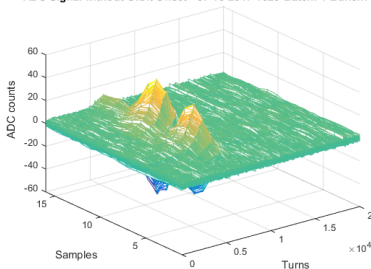

ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

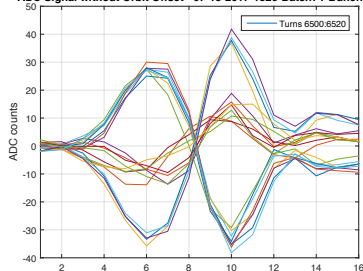


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1320

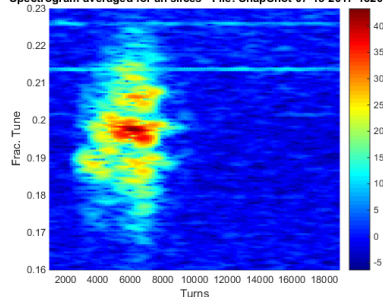


- Mostly mode 1 excited, some mode 2
- Evidence of power converter noise and tune modulation
- Mode 0 seems well-controlled by transverse dampers
- Complete mode 1 damping to noise floor
- Studies of damping rate vs feedback gain
- Instability threshold via pos FB gain study

# Q22 train of 72 - bunch 70 M 1 doesn't damp w/o FB


ADC Signal without Orbit Offset - 07-15-2017-1252-Batch: 1-Bunch: 70

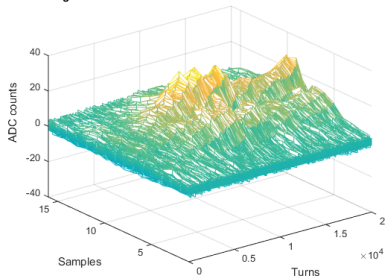


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1252

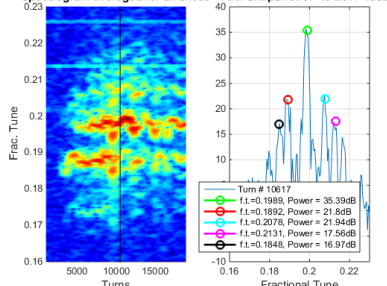

Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1252


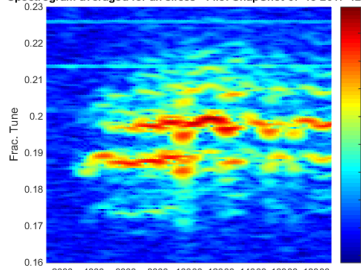


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1252

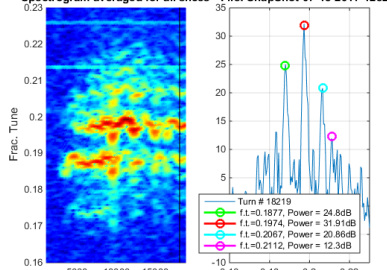





# SPS - High Current Multi-Bunch Control

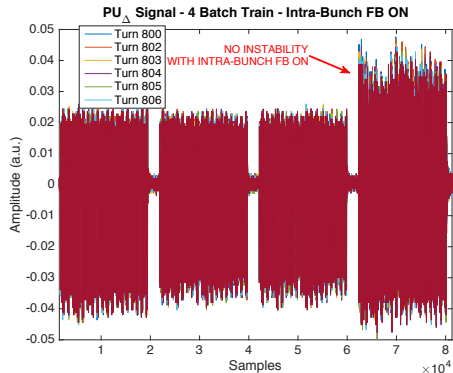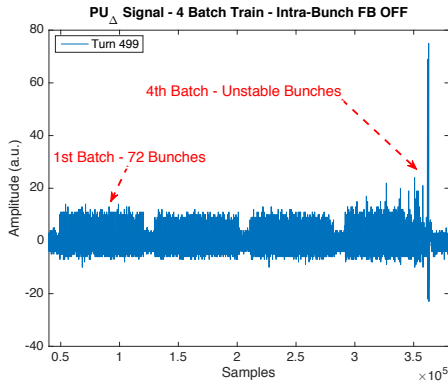



- High Current Train SPS Measurement - 4 stacks of 72 bunches
- Intensity  $1.8 \times 10^{11}$  with low chromaticity Q20 lattice ( special beam)
- Instability seen at end of 4th stack - Wideband Feedback OFF
- Instability leads to loss of charge from end of Stack 4
- Instability controlled on 4th stack - Wideband Feedback ON (extra charge injected, too)
- in both cases existing SPS Transverse damper is ON

# Data Snapshot - High Current Multi-Bunch Control

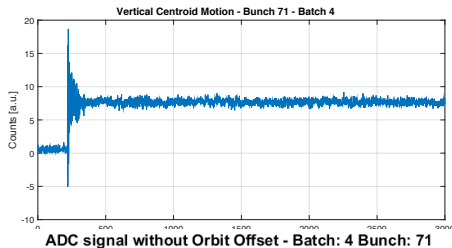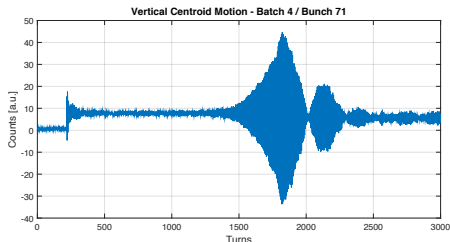


ADC signal without Orbit Offset - Batch: 4 Bunch: 71


ADC signal without Orbit Offset - Batch: 4 Bunch: 71

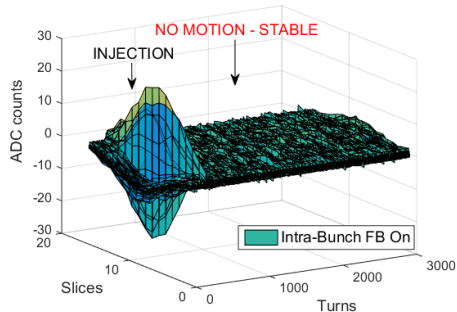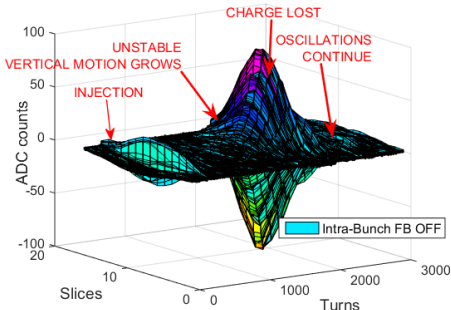

# Q22 studies, Intensity limits w/without Feedback

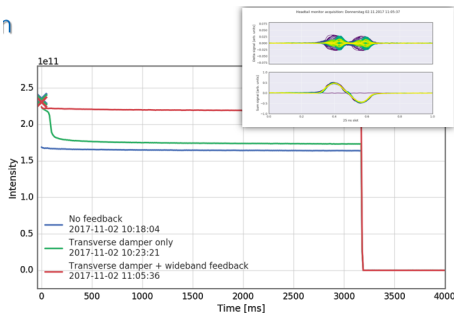

## WBFB at Q22 with reduced RF voltage (1 MV)

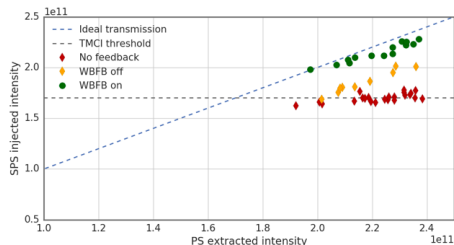

H. Bartosik, K. Li et al. (2017)


- chromaticity close to zero
- threshold at nominal voltage in Q22 close to LIU intensities  $2.7 \text{ MV} - 2.4 \times 10^{11}$



- Intensity scan with low chromaticity Q22 lattice ( special beam)
- LEFT Instability seen immediately from injection - Feedback OFF
  - Instability leads to loss of charge without feedback, roughly 400 -turns
- RIGHT Increased transmission through SPS - Wideband Feedback ON
  - TMCI Head-Tail instability ( intra-bunch)
- Important to understand injection transient and saturation impacts, mode 0


# Q22 studies, Transmission over time w/without Feedback

- The wideband feedback loop **was closed and opened several times** over a period of half an hour **to ensure reproducibility** of both the TMCI and the stabilization of the latter.
- There is a **clear correlation** between transmission and open/closed loop configuration.

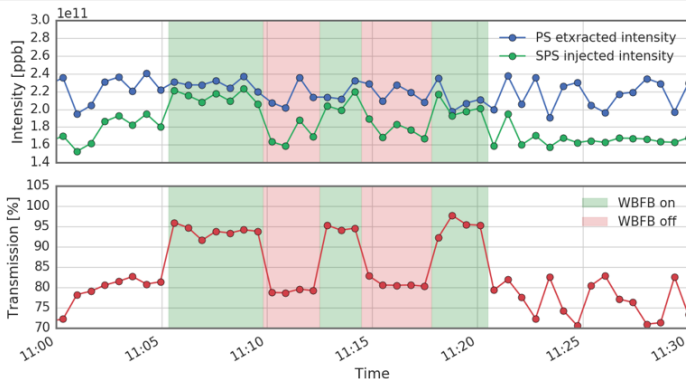

- from K. Li, et al
- Increased transmission through SPS - Wideband Feedback ON
  - TMCI Head-Tail instability ( intra-bunch)
- issues with shot to shot variation - excellent technique


# Advantages of Model-Based Control

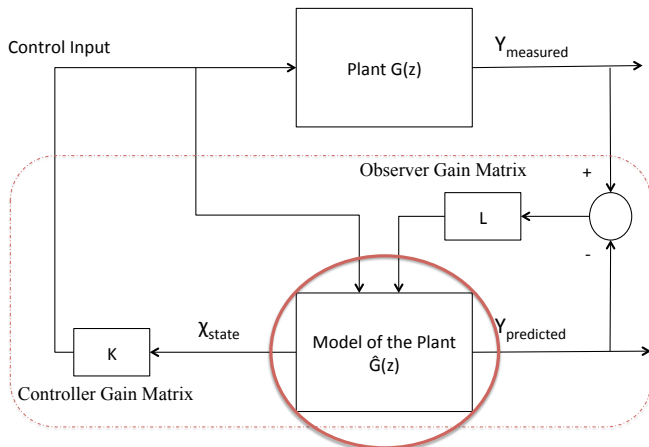

A Model Based Controller - LQG

- Control of Non-linear Dynamics ( Intra-bunch) is challenging
- Tune variations, optics issues limit FIR gain
- Control Formalism - allows formal methods to quantify stability and dynamics, margins
- Ph.D. Thesis for O. Turgut - New directions, model based MIMO formalism





# Model - is derived from Simulation or MD studies

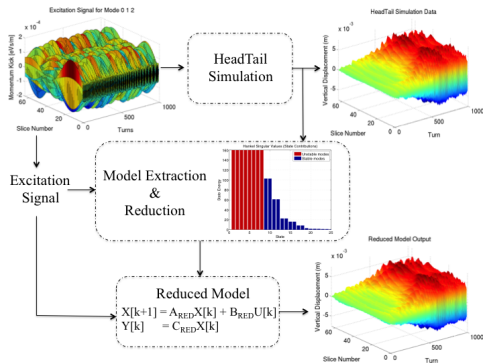

- Parameters of the transfer function representing the modes 0, 1 and 2 dynamics are identified using open loop simulation data.
- We use the same excitation signal to drive the reduced order model and compare the time domain result with HeadTail simulation result for model verification.
- This model is used to design a model-based controller (Discrete-time linear quadratic optimal controller).

- Linear model - allows analytic knowledge of limits
- better than FIR for closer  $\omega_\beta$  and  $\omega_s$  Tunes, optics issues limit
- Control Formalism - allows formal methods to quantify stability and dynamics, margins
- model based MIMO formalism uses information from pickup more completely


# Head-Tail vs Reduced Model results




- Time Domain data is fit, Models in Time and Frequency Domain
- Model can be fit to simulation or physical machine data
- comparing simulation, experimental reduced models excellent way to validate nonlinear simulations

# MIMO Modal 4X4 controller - Beam Simulation


RMS Power Spectrogram of OL Driven Response - MIMO Model

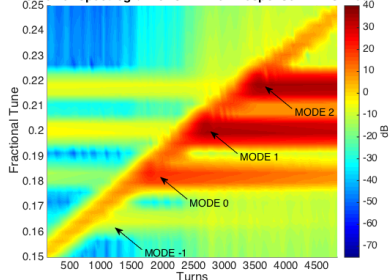

Model Based FB Closed Loop Poles

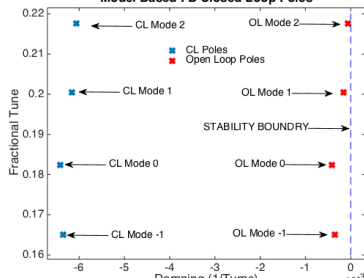





RMS Power Spectrogram - CL Driven Resp. - Model Based FB

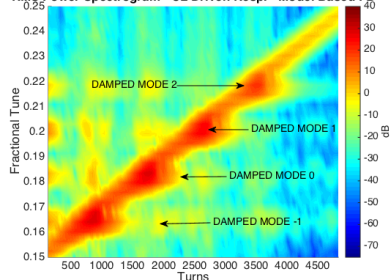

- 4 Coupled-Oscillator model
- 4x4 modal ( matrix) controller
- Much better control of all modes compared to FIR
- disadvantage - much more complex numeric processing (  $n^2$  more)
- What about sparse control with few off diagonal elements?
- O. Turgut Stanford Ph.D.



# Wideband Kicker - initial study for LHC and FCC - broadband $Z_l$ ? ( G. Zhu)

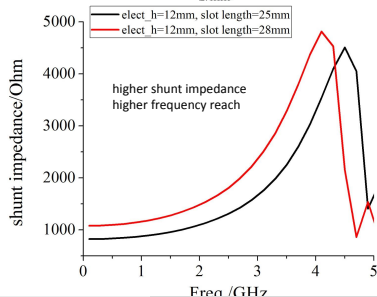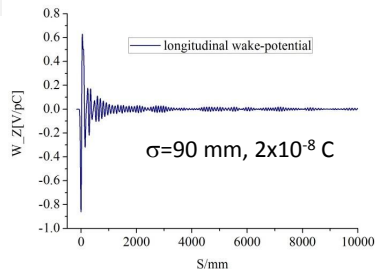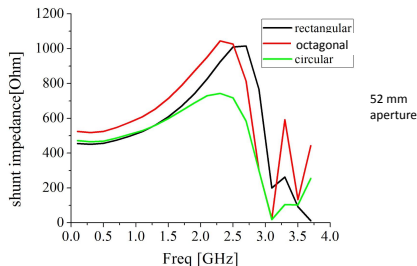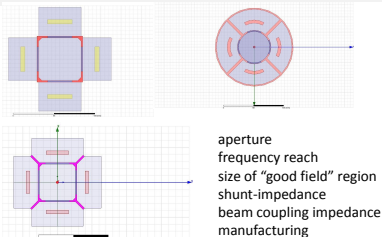

# SPS MD studies - Q26, Q20 and Q22 Optics

## ● System Technology development and validation

- demonstrated intra-bunch control of unstable beams  $1.7 \text{ ns } \sigma$
- Achieved damping rates  $1/200$  turns ( limited kicker)
- Noise floors in system, damped beam noise floors
- Development/evaluation of control filters for Q26, Q20, Q22 ( $Q_s$  impact)
- Analysis tools and comparisons to simulation methods
- First commissioning of slotline structure

## ● Single Bunch Studies (to date)

- Control Head-Tail type intrabunch instability
- Damping of intrabunch unstable motions with growth time  $> 200$  turns
- Explore interaction of Wideband and traditional mode 0 transverse damper
- Demonstrated 20% increase in SPS intensity threshold (special beam)

## ● Multi-Bunch Control

- WBFB controls coupled-bunch and intra-bunch instabilities in multi bunch trains
- Control of unstable bunch motion, study of damping of bunch vs. position
- MD Goal - induce intra bunch instabilities via electron clouds in the last batch, but to date unstable bunches at end of train present only Mode 0 motion.
- Further MD studies can explore control of a clear "Ecloud" driven instability (higher intensity?)

## ● Future -optimal controllers to stabilize motion with faster growth rates. Full implementation of slot line kicker/amplifiers will provide significant gain increase, but bandwidth concerns with diagonal FIR controllers

# Next Steps?

## ● Technology Ideas

- 8 GS/sec DSP processing, two channel architectures
- Wideband pickups, processing and equalization (extension of existing)
- Increase kicker bandwidth to 2 - 4 GHz (or what is required for HL-LHC?)
- Explore wideband kickers (slotline as well as multiple kickers in specific bands)

## ● Future MD studies

- Development/evaluation of control filters for Q22 and Q20 ( $Q_s$  impact)
- Analysis tools and comparisons to simulation methods
- Explore Model-based filters (O. Turgut Thesis)
- Understand limits of the methods

## ● Support for future R&D efforts

- US DOE ( LARP and GARD) support for this effort terminated 2017
- SLAC group dissolved, staff loss through attrition, layoff and re-assignment to other projects
- Concerns about long-term maintainability of Demo System
- CERN may continue SPS studies after restart of HL-LHC

## ● Can we we-start this joint research area? What funding mechanisms might support some US effort?


# Acknowledgements




- We thank the ARiES WP6 program and the LNF-INFN laboratory for travel support to the APEC workshop, and the CERN LIU program for travel support to CERN in 2017 and 2018. The US-Japan High luminosity Collaboration supported C. Rivetta CERN travel in 2018.

- Thanks to CERN, SLAC, KEK and LARP for support
- Thanks to D. Teytelman and M. Tobiyama for contributions for this talk. We acknowledge S. Uemura, A. Bullitt, J. Cesaratto, J. Goldfield, J. Platt, K. Pollock, N. Redmon, S. Verdu, S. De Santis, G. Kotzian, D. Valuch, M. Wendt, G. Zhu, D. Alessini, A. Drago, S. Gallo, F. Marcellini, M. Zobov and D. Teytelman for SPS System contributions and years of collaboration.
- We acknowledge our many friends and collaborators at US, European and Japanese labs, with whom we have learned so much.
- We are grateful for the collaboration and generous help with the SPS studies from everyone in the control room and operations groups.

# Feedback Filters - Frequency Domain Design

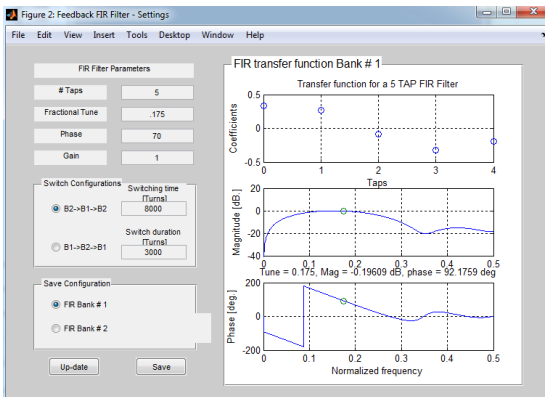


- FIR up to 16 taps
- Designed in Matlab
- Filter phase shift at tune must be adjusted to include overall loop phase shifts and cable delay
- Based on methods used in coupled-bunch systems

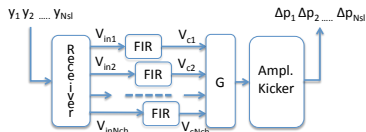

The processing system can be expanded to support more complex off-diagonal (modal) filters, IIR filters, etc as part of the research and technology development

# Complementary Striplines and Slotline

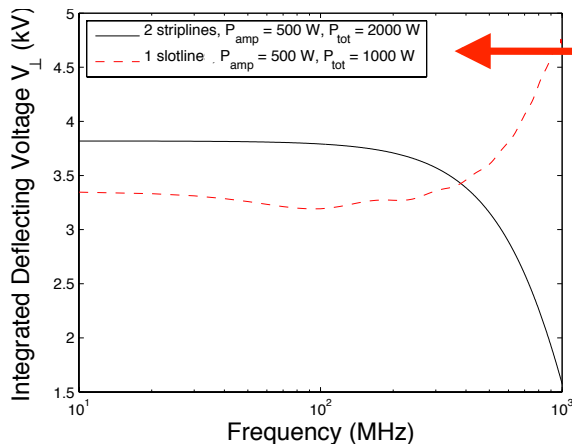

CERN plans to install:

- 2 Striplines
- 1 Slotline

- At low frequencies, the striplines have slightly higher kick strength.
- However, the slotline can effectively cover the bandwidth up to 1 GHz.
- MDs with the new kicker prototypes are **ABSOLUTELY ESSENTIAL** to validate and confirm the technologies, bandwidth and kick strength needed

# Wideband Feedback - Implementation in LHC

- Architecture being developed is **reconfigurable!**
- Processing unit implementation in LHC similar to SPS:

	SPS	LHC
RF frequency (MHz)	200	400
$f_{\text{rev}}$ (kHz)	43.4	11.1
# bunches/beam	288	2808
# samples/bunch	16	16
# filter taps/sample	16	16
Multi-Accum (GMac/s)	3.2	8


- LHC needs more multiply-accumulation operation resources because of # of bunches, but reduced  $f_{\text{rev}}$  allows longer computation time (assuming diagonal control).
  - LHC signal processing is roughly x2 more FPGA resources
  - Similar architecture can accommodate needs of both SPS and LHC.
- Still need kicker of appropriate bandwidth with acceptable impedance for LHC. Learn from SPS Slotline, simulation study of 4 GHz slotline in process at CERN.

# Next Technology Development Opportunity

- Upgraded High-speed DSP Platform consistent with 4 -8 GS/sec sampling rates for MD studies
  - Parallel 4 GS/sec ADC paths, for multiple pickups or improved noise floor
  - Explore value of  $\Delta\Sigma$  front end, with charge normalization
  - Low-noise transverse coordinate receivers, orbit offset/dynamic range improvements, pickups
  - Expand Master Oscillator, Timing system for Energy ramp control
  - Allow multiple kickers,  $\pi/4$  separation, higher gain
- Upgraded Demo platform - Funding? No US effort, group disbanded
  - Greater FPGA resources, allows more complex modal filters, higher sampling rate filters
  - Two 4 GS/sec input ADC streams, allowing single 8 GS/sec data path, or two pickups with 4 GS/s data paths
  - Reconfigurable FPGA processing allows re-targeting to LHC, other facilities
- Lab evaluation and firmware development
- Validate key features for robust control for Q20, Q22, Q26, other possible dynamics



# Upgrades to the SPS Demonstrator - Roadmap

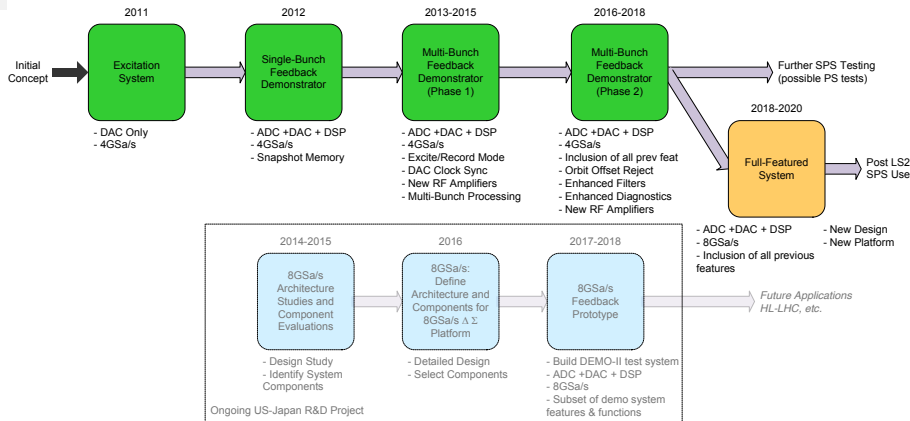

- The Demo system is a reconfigurable platform to evaluate control techniques
- MD experience has guided necessary system specifications and capabilities
- The path towards a full-featured system is flexible, can support multiple pickups and/or multiple kickers
- US-Japan testbed in progress to validate 8 GS/s processing technology

# Limitations on system gain

- For any causal feedback technique, the system gain and bandwidth are limited
- Gain is partitioned between pickup, receiver, DSP, RF amplifiers and kickers
- for FIR or bandpass filter, 2 gain limit mechanisms
  - Group delay/bandwidth gain limit - phase/gain margins lost as gain is increased, drive instabilities
  - Noise saturation limit - input noise\*gain saturates kicker
- Impacts of injection transients, driven signals within the system filter bandwidth
- Do we see these limits in operating systems?



# Impacts of feedback noise in beam collision

MOPD73

Proceedings of DIPAC2011, Hamburg, Germany

## STUDY OF BEAM SIZE BLOWUP DUE TO TRANSVERSE BUNCH FEEDBACK NOISE ON $e^+e^-$ COLLIDER\*

Makoto Tobiyama<sup>#</sup> and Kazuhito Ohmi,  
KEK Accelerator Laboratory, 1-1 Oho, Tsukuba 305-0801, Japan.

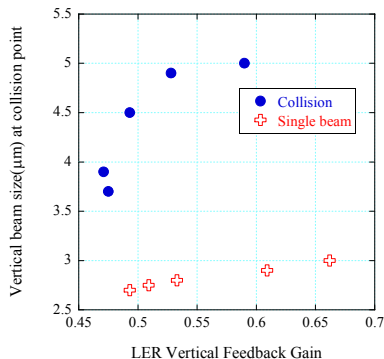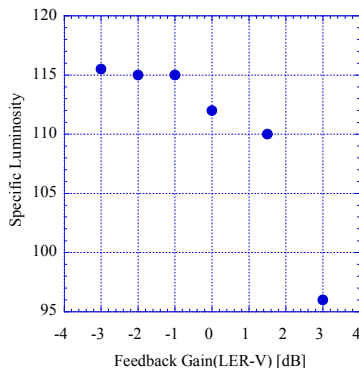

● Discovery of luminosity decrease in KEKB collider, function of vertical feedback gain

# KEKB collider Impacts of feedback noise




Figure 1: Luminosity reduction with the KEBB-LER vertical feedback gain.


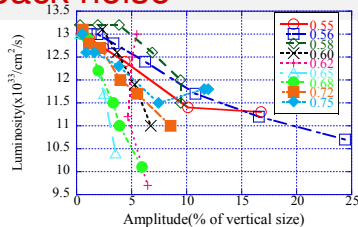


Figure 5: Luminosity degradation due to oscillation applied externally in the feedback system.


## KEKB transverse bunch feedback system

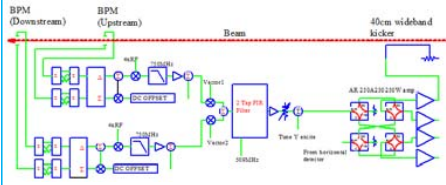

- Beam-Beam effect in collision amplifies noise in feedback system
- Understood via simulations and verified with noise injection into system
- Original KEBB vertical system used 2-tap filter, no processing gain. All noise folded into processing channel. SuperKEKB systems expanded with feedback filters

# Noise Floor - Operational Demo SPS system


Spectrogram averaged for all slices - File: SnapShot-07-18-2017-1009

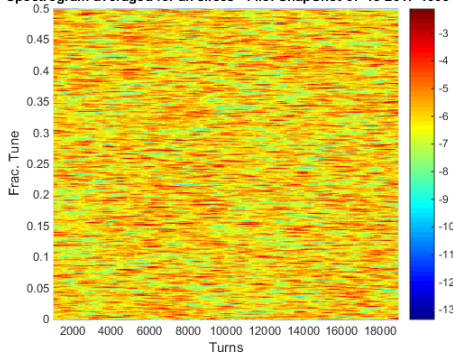

## ● ADC Terminated in 50 Ohms

- very quiet, near theoretical quantizing noise
- Spectrogram shows very flat spectrum, no clock pickup
- System maximum gain is determined by receiver noise floor


Spectrogram averaged for all slices - File: SnapShot-07-18-2017-1019

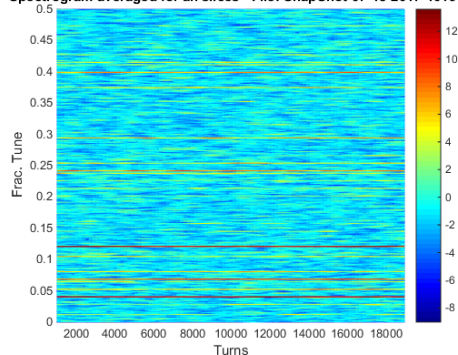


- Receiver with pickups ( no beam condition, RF and magnets on)
  - Receiver broadband noise slightly higher than ADC quantizing noise ( 2dB? 3dB?)
  - narrowband lines seen - from ?

# SNR and sensitivity of front-end receiver

## Detail of Receiver - ADC

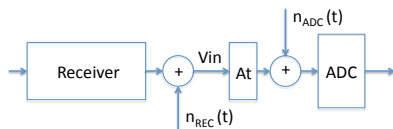

## Front-end Noise and Bunch Motion

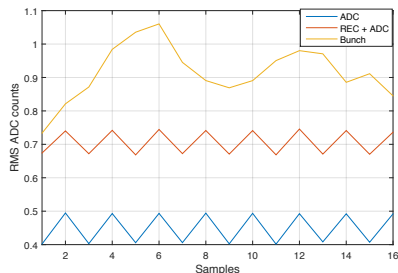

ADC :  $+127c / -128c = \pm 250 \text{ mV}$  ;

$\Delta V = 1.952 \text{ mV/c}$ .

Attn. =  $1/1.65$ :

$V_{in} = \pm 407 \text{ mV}$  ;  $\Delta V_{in} = 3.22 \text{ mV/c}$

Front-end performance - Optimized existing configuration

$\sigma_{nADC} \simeq 0.45 \text{ counts}$

$\sigma_{REC.Attn} \simeq 0.54 \text{ counts}$

$\sigma_{Front-end} \simeq 0.7 \text{ counts} \simeq 12 \mu\text{m RMS per sample}$

$\sigma_{y-Centroid} \simeq 3 \mu\text{m RMS}$

RMS damped Beam motion

Transverse


$\sigma_Y = 2.8 \mu\text{m rms}$

Contributions from synchrotron motion  $\sigma_Z$ ,  
sampling clock phase noise  $\sigma_{\Delta T}$

$$\sqrt{\sigma_Z^2 + \sigma_{\Delta T}^2} = 6.25 \text{ ps rms}$$


# 4 batch Q20 study - bunch 70 batch 4 open loop

ADC Signal without Orbit Offset - 07-19-2017-1504-Batch: 4-Bunch: 70

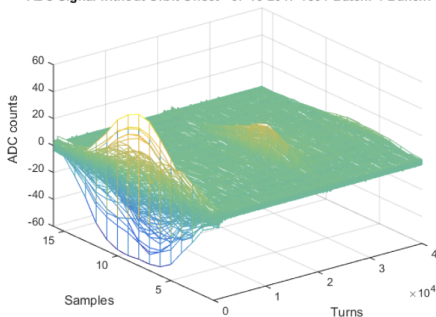


- Study unstable bunch at end of last train
- Attempt to excite Ecloud instability
- unstable bunch in batch is mode zero motion
- study can also focus on tune shifts vs bunch position

Spectrogram averaged for all slices - File: SnapShot-07-19-2017-1504

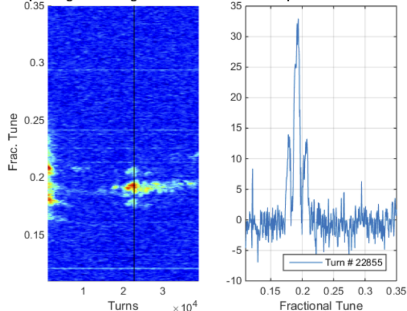

ADC Signal without Orbit Offset - 07-19-2017-1504-Batch: 4-Bunch: 70

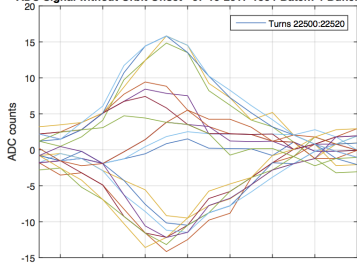


# Damping studies

- Studies of excited beam, followed by damping at various damping gains
  - bunch 70 of multi-bunch Q22 fill
  - Both transverse dampers ON
  - Studies from July 15 , 8 minute interval
  - attempt to have similar currents, excitation, only vary damping gain
  - Excitation is positive feedback SG=3 for turns 3000 - 6500
  - Damping is from turn 6500
- damping SG varied by x8 from 3 ( highest),4,5,6 (lowest)
- we have roughly 5 transients at each configuration (200 total)
- these examples selected as roughly equal currents
- need to quantify damping rates vs gain




# Damping SG= 3 (highest gain)7-15 1320


ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

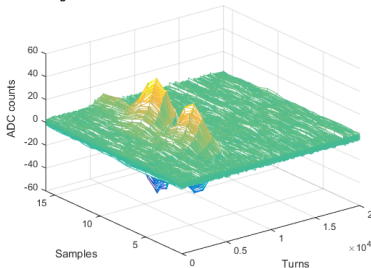

ADC Signal without Orbit Offset - 07-15-2017-1320-Batch: 1-Bunch: 70

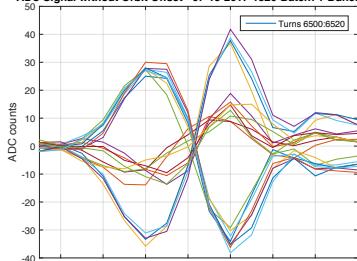


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1320

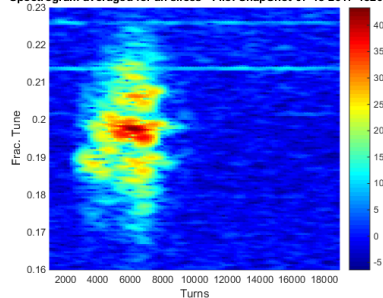


- Mostly mode 1 excited, some mode 2
- Mode 0 seems well-controlled by transverse dampers
- Complete mode 1 damping in roughly 1000 turns
- damping to noise floor

# Damping SG= 4 ( 1/2 highest gain)7-15 1318b


ADC Signal without Orbit Offset - 07-15-2017-1318b-Batch: 1-Bunch: 70

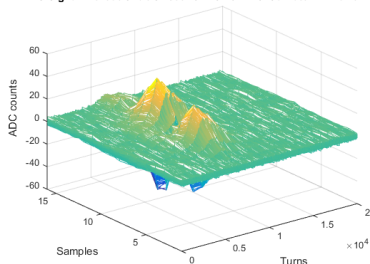

ADC Signal without Orbit Offset - 07-15-2017-1318b-Batch: 1-Bunch: 70

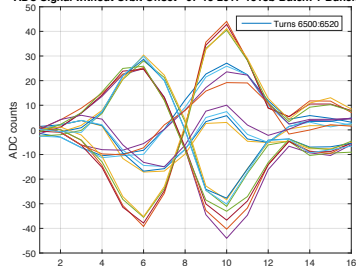


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1318b

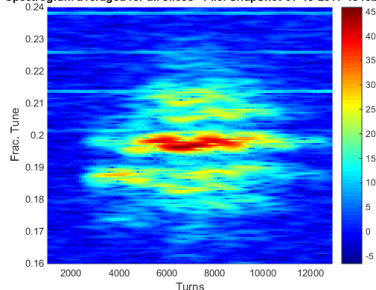


- Mostly mode 1 excited, some mode 2 -same case
- Mode 0 seems well-controlled by transverse dampers
- Complete mode 1 damping in roughly 3500 turns
- damping to noise floor

# Damping SG= 5 ( 1/4 highest gain) 7-15 1323


ADC Signal without Orbit Offset - 07-15-2017-1323-Batch: 1-Bunch: 70

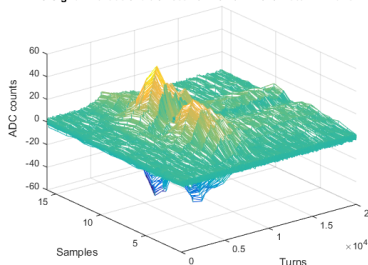

Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1323

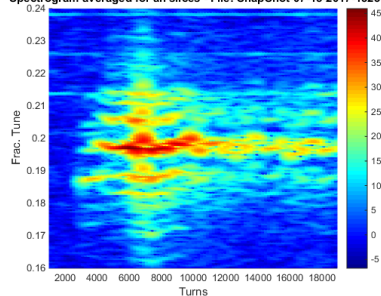


ADC Signal without Orbit Offset - 07-15-2017-1323-Batch: 1-Bunch: 70

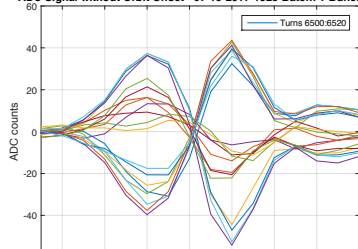


- Mostly mode 1 excited, some mode 2 -same case
- residual motion at mode 0 and 1,2 seen to be decaying
- Complete mode 1 damping in roughly 10000 turns
- Final damped state not recorded, post length

# Damping SG= 6 ( 1/8 highest gain)7-15 1326


ADC Signal without Orbit Offset - 07-15-2017-1326-Batch: 1-Bunch: 70

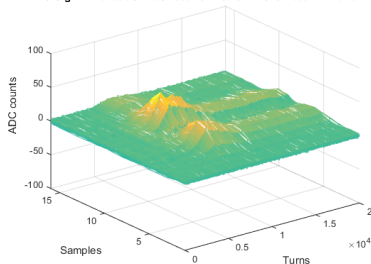

ADC Signal without Orbit Offset - 07-15-2017-1326-Batch: 1-Bunch: 70




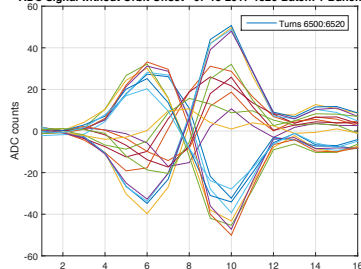


Spectrogram averaged for all slices - File: SnapShot-07-15-2017-1326

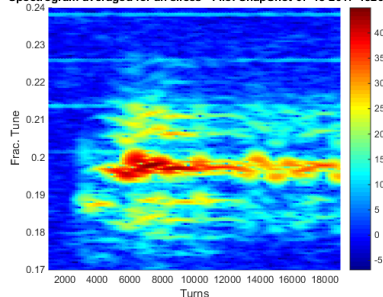


- Mostly mode 1, mode 2 -same case
- residual motion at mode 0 and 1,2 seen to be decaying
- Gain seems marginal, but is sufficient to damp
- Final damped state >10000 turns, post length

# Compare 4 damping gains x8, x4, x2 and x1

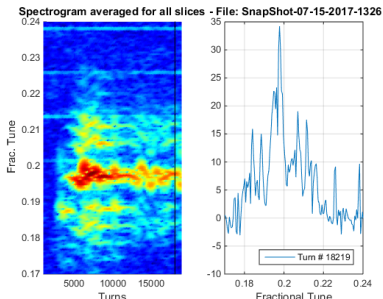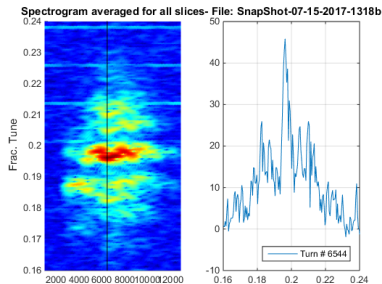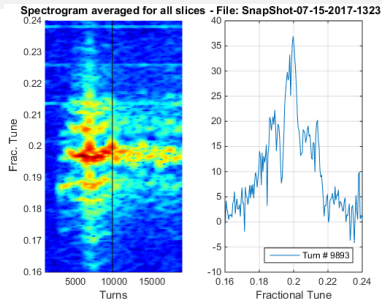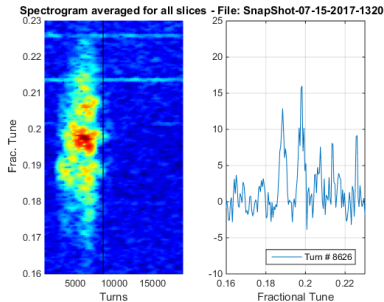


# Excite bunch 50- excite feedback SG4 vs SG3


ADC Signal without Orbit Offset - 07-15-2017-1340-Batch: 1-Bunch: 50




ADC Signal without Orbit Offset - 07-15-2017-1343-Batch: 1-Bunch: 50



Spectrogram averaged for all slices - File: Snapshot-07-15-2017-1340






Spectrogram averaged for all slices - File: Snapshot-07-15-2017-1343



positive feedback gain insufficient to drive un- positive feedback x2 gain now drives unstable  
stable growth growth

# Intrabunch Feedback - Beam Diagnostic Value

- Feedback and Beam dynamics sensitive measure of impedance and other dynamic effects
- Complementary to existing beam diagnostic techniques
- Novel time and frequency domain diagnostics
  - reconfigurable platform, 4 - 8 GS/s data rates
  - snapshot memories, excitation memories
  - stable and unstable systems can be studied with various methods

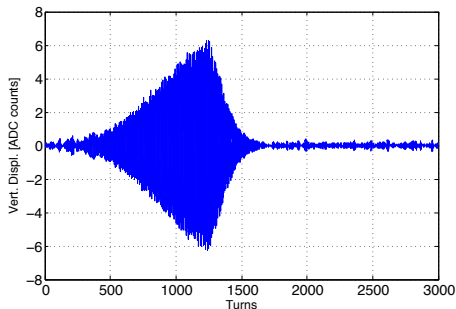

# Beam Measurements, Simulation Models, Technology Development, Wideband Kickers and Demo System

