


# ***FACT** – the **First G-APD Cherenkov Telescope***

## **Status and Experience from Six+ Years Operation of the First SiPM Camera**

*Dominik Neise for the FACT Collaboration*

## IAC T

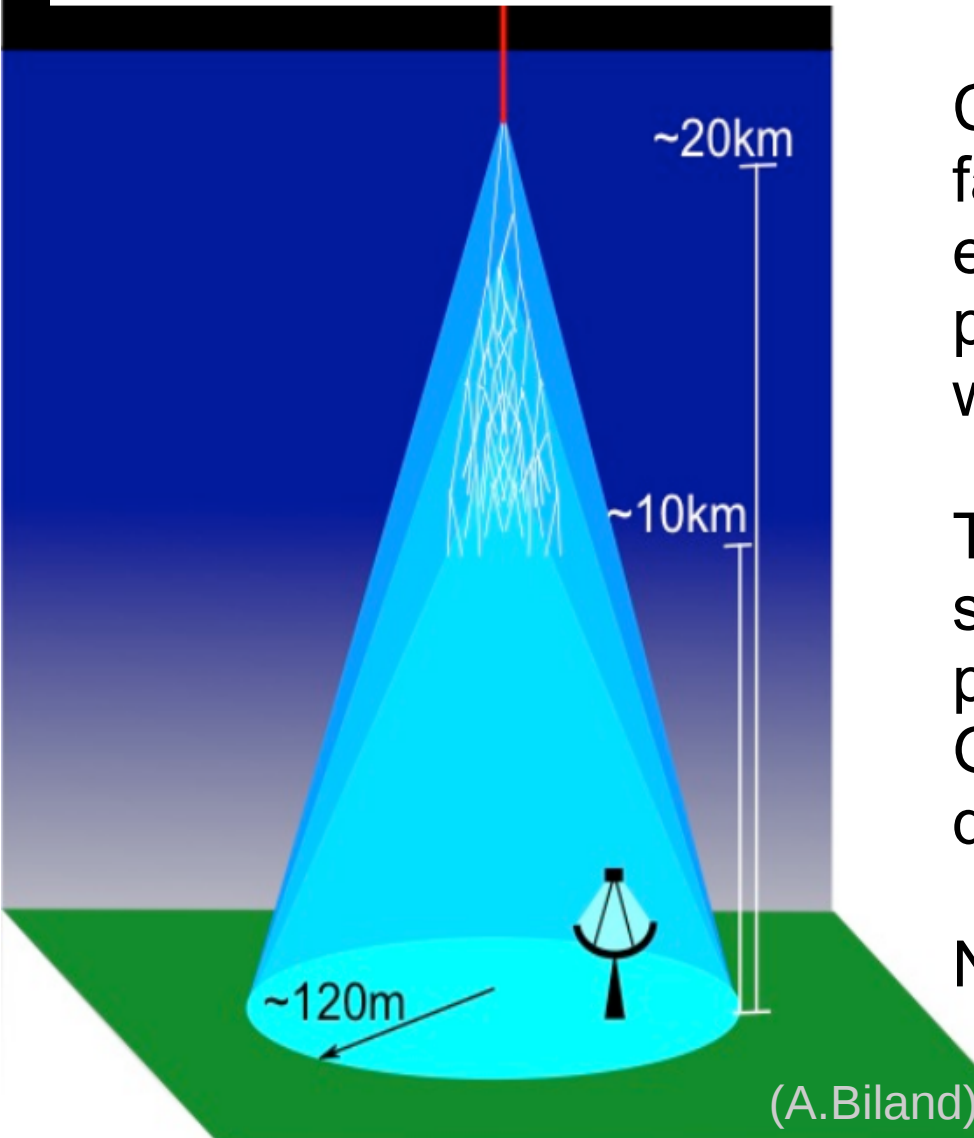

Cherenkov telescopes measure faint flashes of Cherenkov light emitted when a cosmic ray particle or gamma-ray interacts with the atmosphere.

Typically one measures showers with 50 Cherenkov-photons within few ns over a 50 GHz night sky background for dark night conditions.

Number of Cherenkov Photons is  $\sim$ proportional to energy of primary particle.



**Very harsh  
environment  
intrinsic  
to IACT**




# Detailed List of Problems due to G-APD (SiPM)

## Detailed List of Problems due to G-APD (SiPM)

**thank you for  
your attention**

# ***FACT – History***




## FACT – History

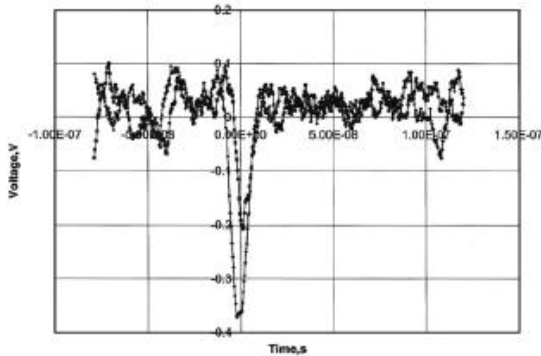

2007: First Cherenkov flashes seen with few G-APDs attached to MAGIC camera [NIM A 581]

2008: Collaboration of ETH Zurich and Universities Dortmund, Geneva, Würzburg (+EPF Lausanne) to build a G-APD based camera for HEGRA CT3

2009: *Module0* (36 pix, 4 G-APD/pix) records self-triggered Cherenkov images from the roof of ETH Zurich [JINST4 P10010] → go for complete camera

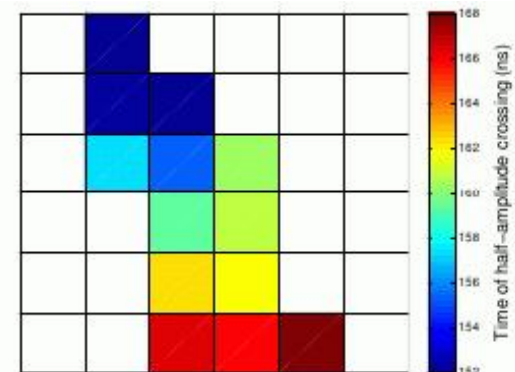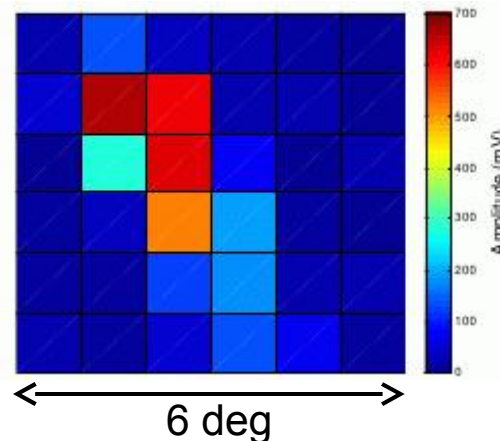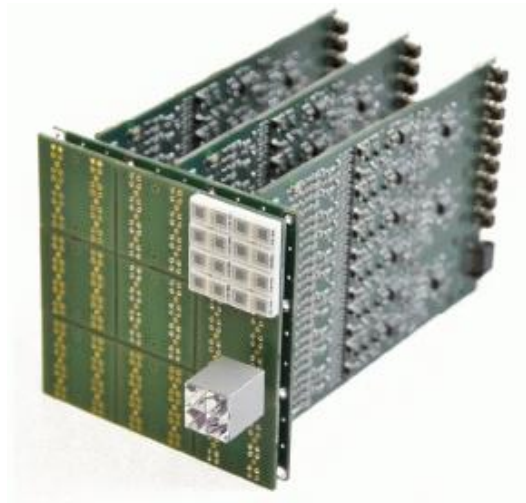



# FACT – G-APD Camera

1: glue G-APD to cone




**1440 pixels**

2: glue cones to front window



3: solder connector cables to G-APDs

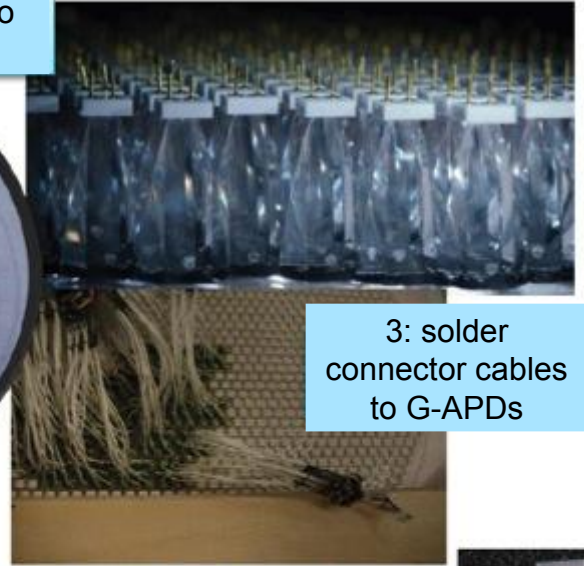

4: install baffle plate




completed sensor plane





Integrated electronics  
DRS4 readout

320 bias voltage channels  
(1 per 4\5 G-APDs)

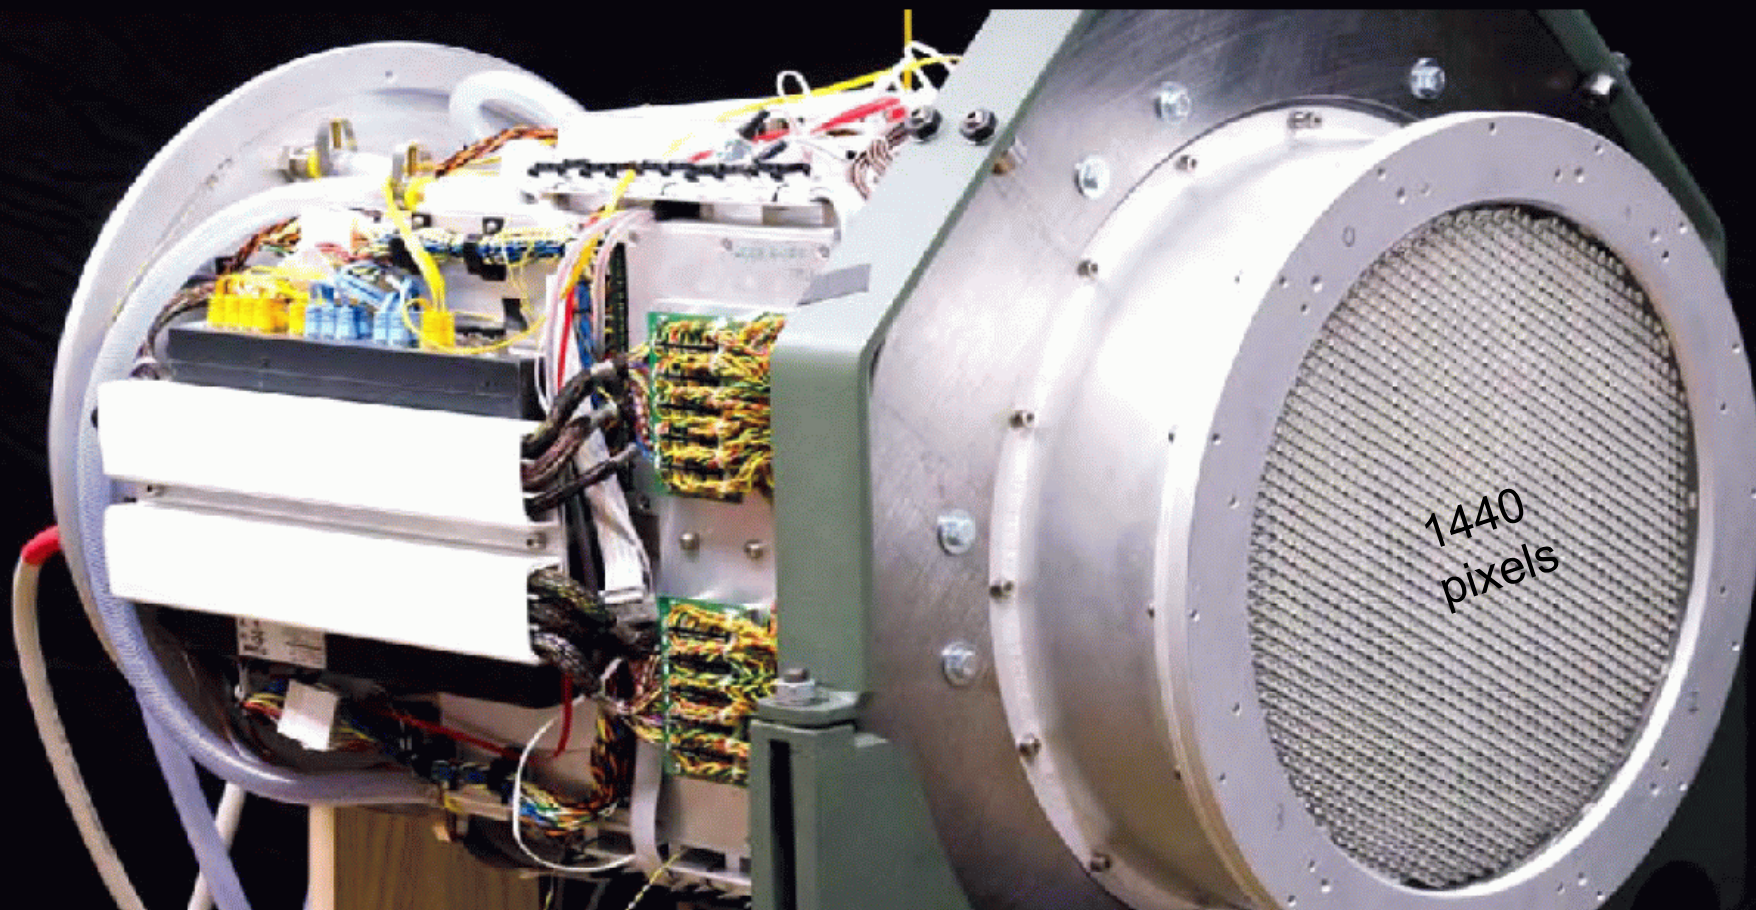

1440  
pixels


Power consumption  $\leq 500\text{W}$   
Readout via Ethernet

160 trigger patches  
(sum of 9 channels)




# FACT – the First G-APD Cherenkov Telescope


Oct. 2011: mounted in refurbished HEGRA CT3  
(9.5m<sup>2</sup> mirror) at La Palma

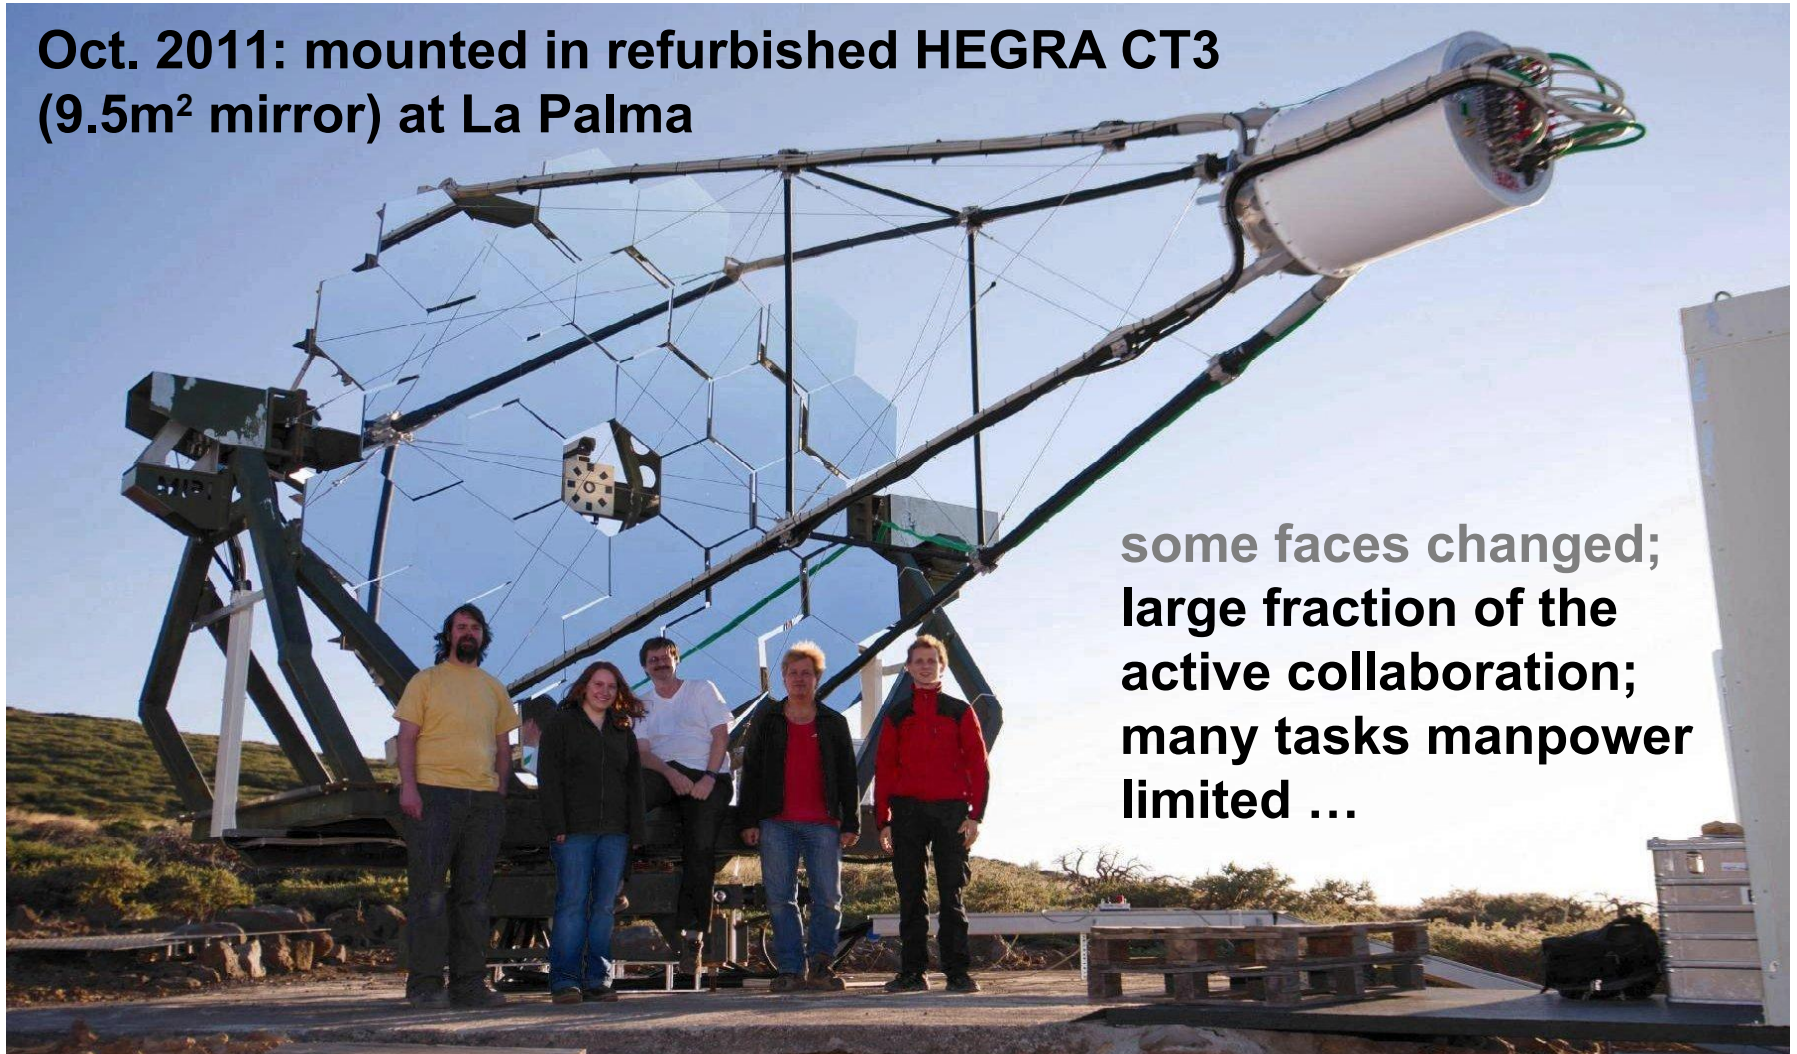

some faces changed;  
large fraction of the  
active collaboration;  
many tasks manpower  
limited ...

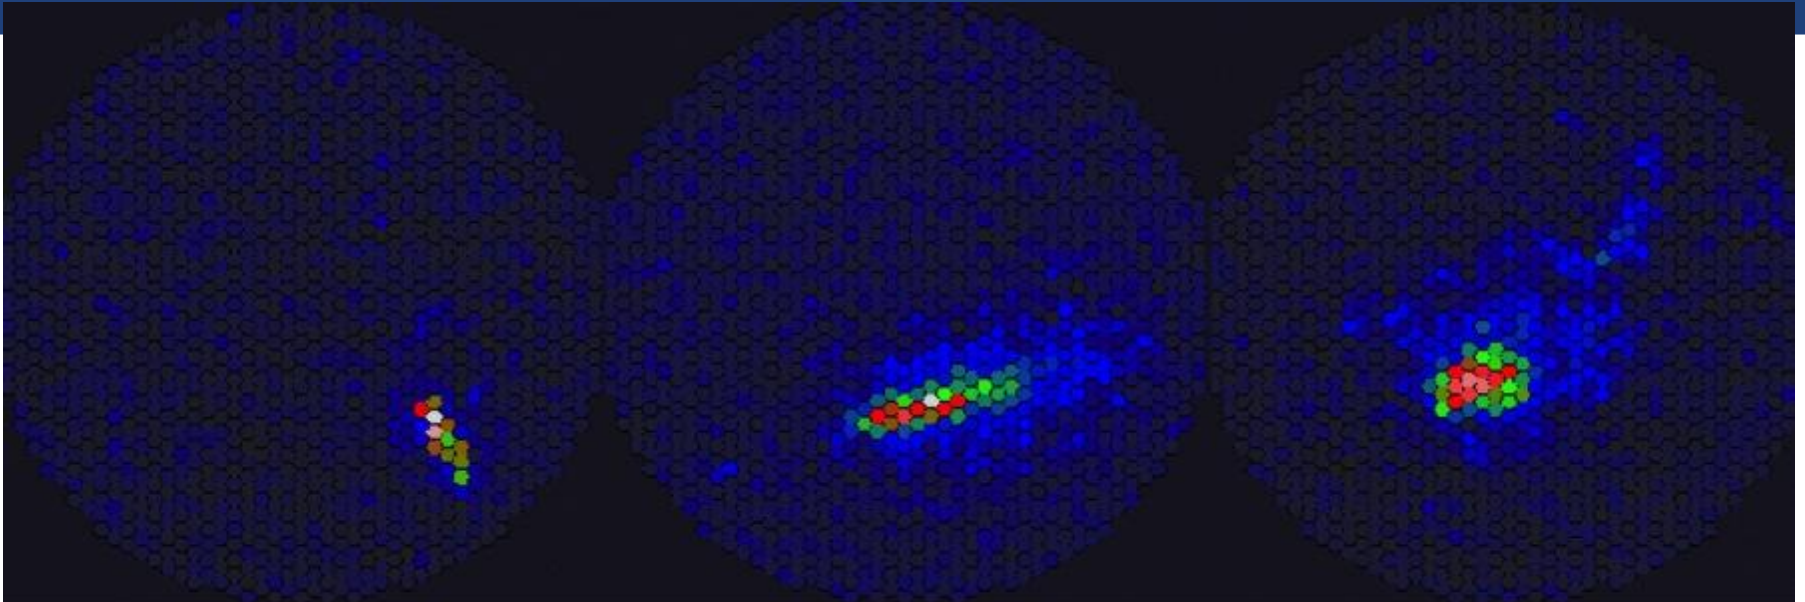

**FACT** – Selected events of the first nights of data-taking (October 2011)

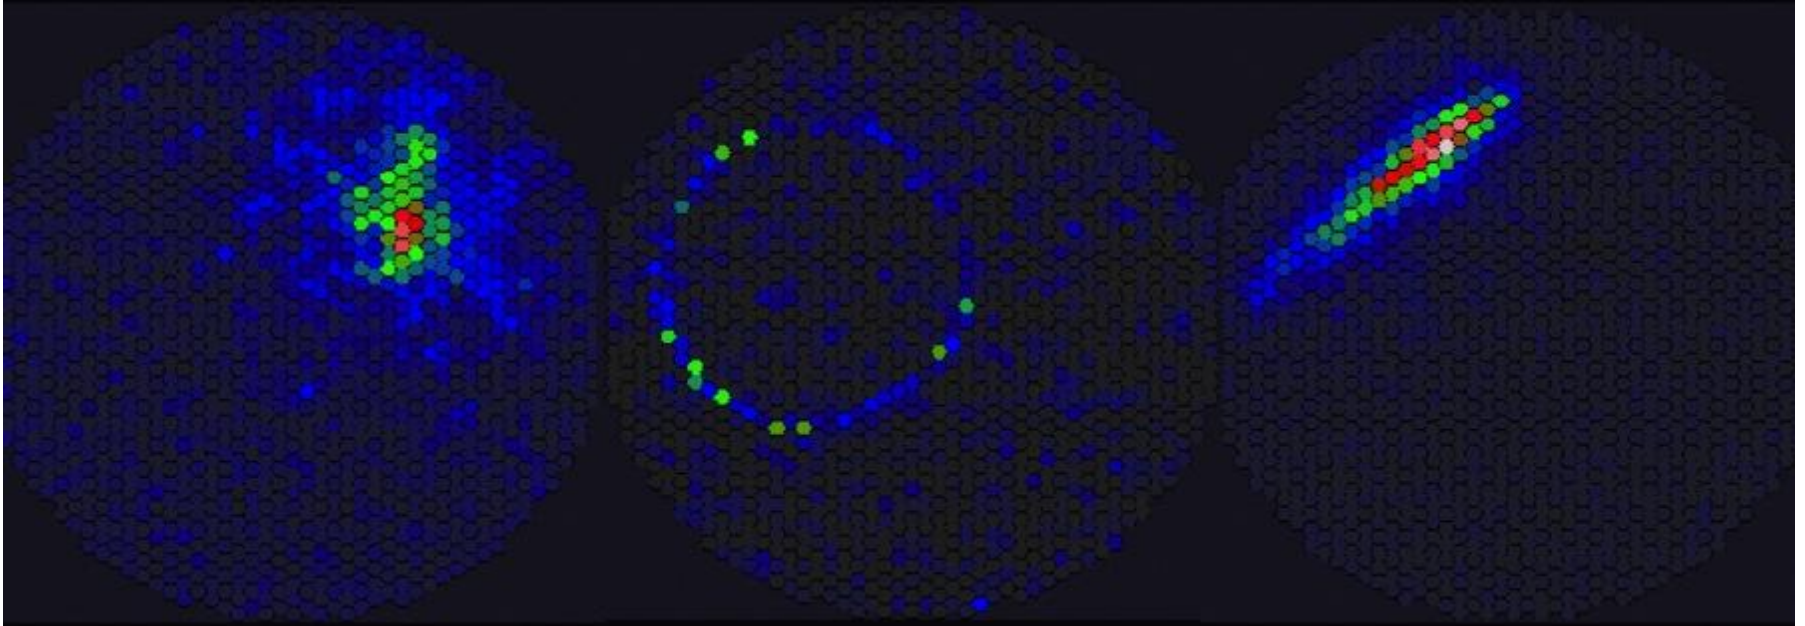



# ***FACT* – Self-calibrating System**



## ***FACT*** – Uniformity & Stability of Camera

(our) G-APD gain has strong Temperature dependency ( $\sim 4\%/degree$ )


→ Feedback system                      → adjust applied voltage to Temp. (and DC)

Nowadays you can even buy power supplies doing this for you.

# FACT – Uniformity & Stability of Camera

(our) G-APD gain has strong Temperature dependency ( $\sim 4\%/degree$ )  
→ Feedback system → adjust applied voltage to Temp. (and DC)  
Nowadays you can even buy power supplies doing this for you.

Monitor gain with 1pe spectra:

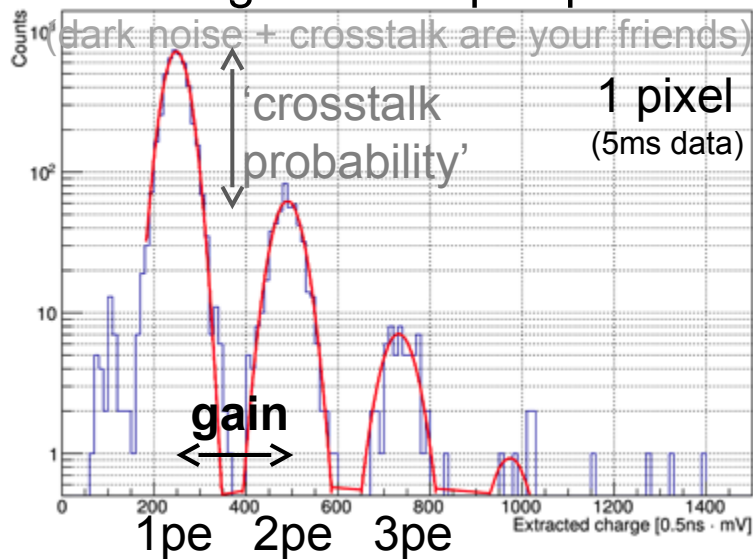

→ dark noise + crosstalk allow calibration without any external device

# FACT – Uniformity & Stability of Camera



(our) G-APD gain has strong Temperature dependency

→ feedback system

→ adjust applied voltage to Temp. (and DC)

check with 1pe spectra:



(dark noise + crosstalk are your friends)

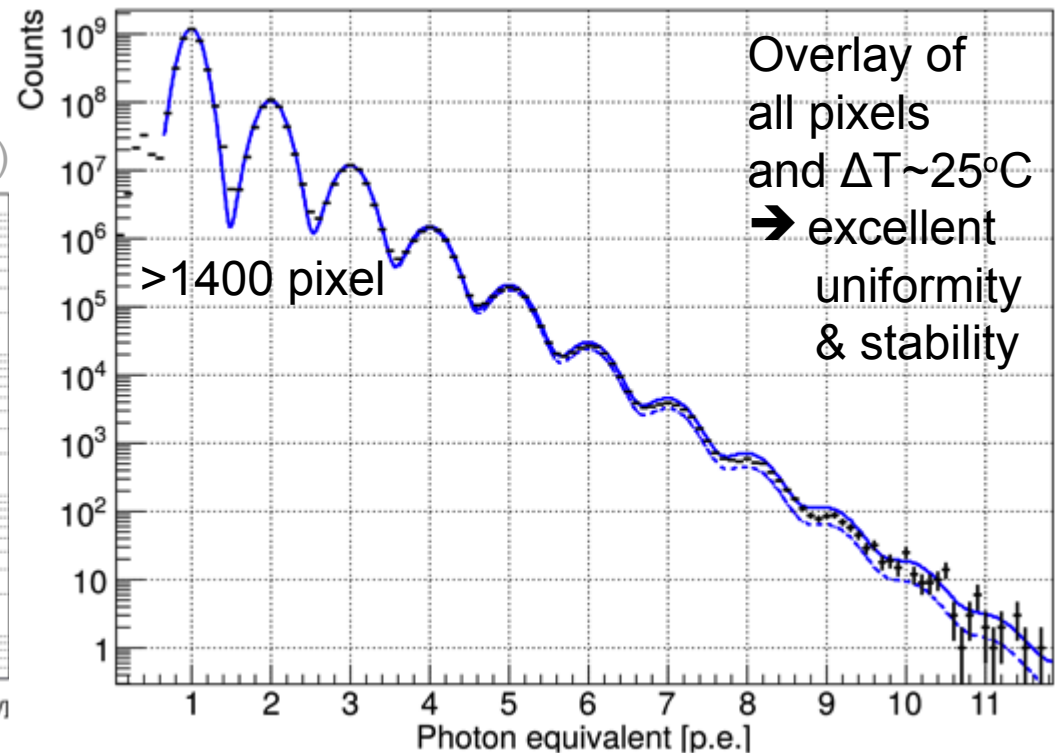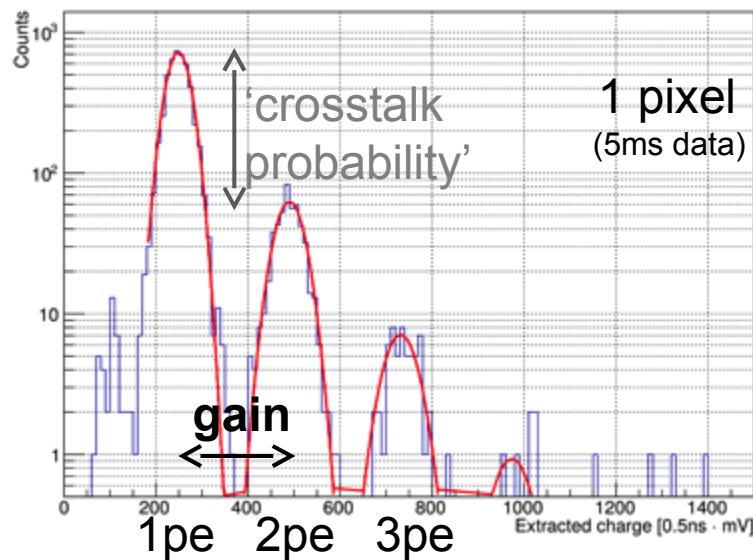

→ dark noise + crosstalk allow calibration without any external device

# FACT – Stability of System

For a given pointing, trigger should always see the same rate of cosmic rays.

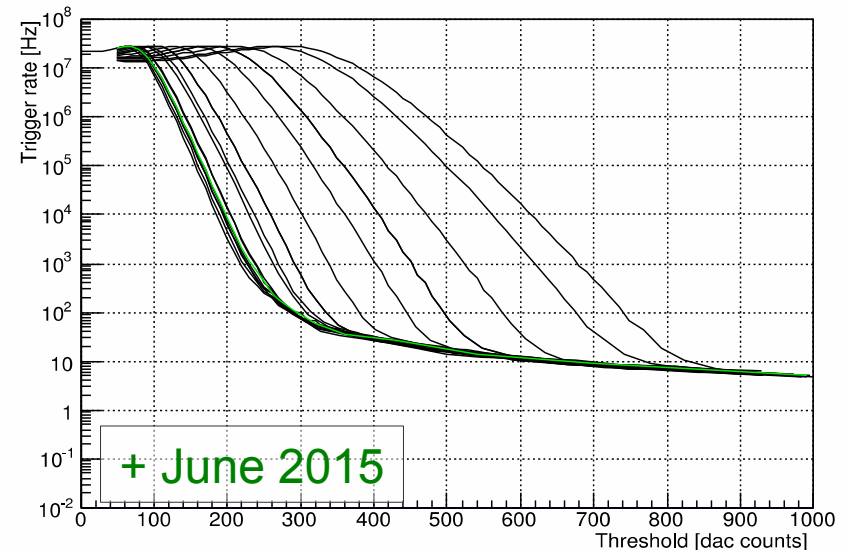
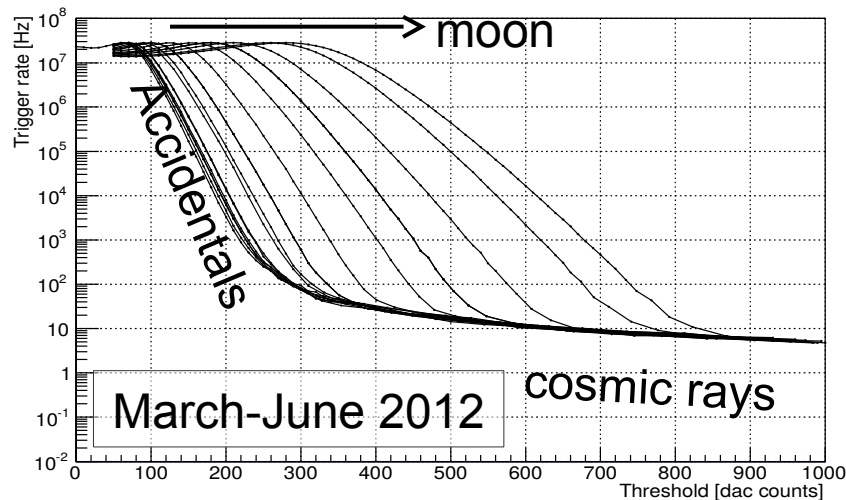


Ratescans show cosmic ray trigger-rate independent of moon, sensor temperature and age of sensors.



# FACT – Stability of System


For a given pointing, trigger should always see the same rate of cosmic rays.

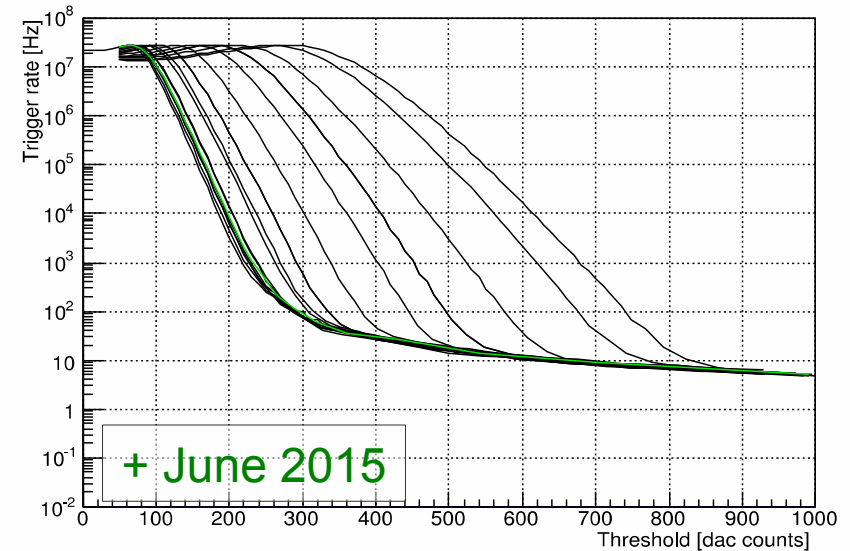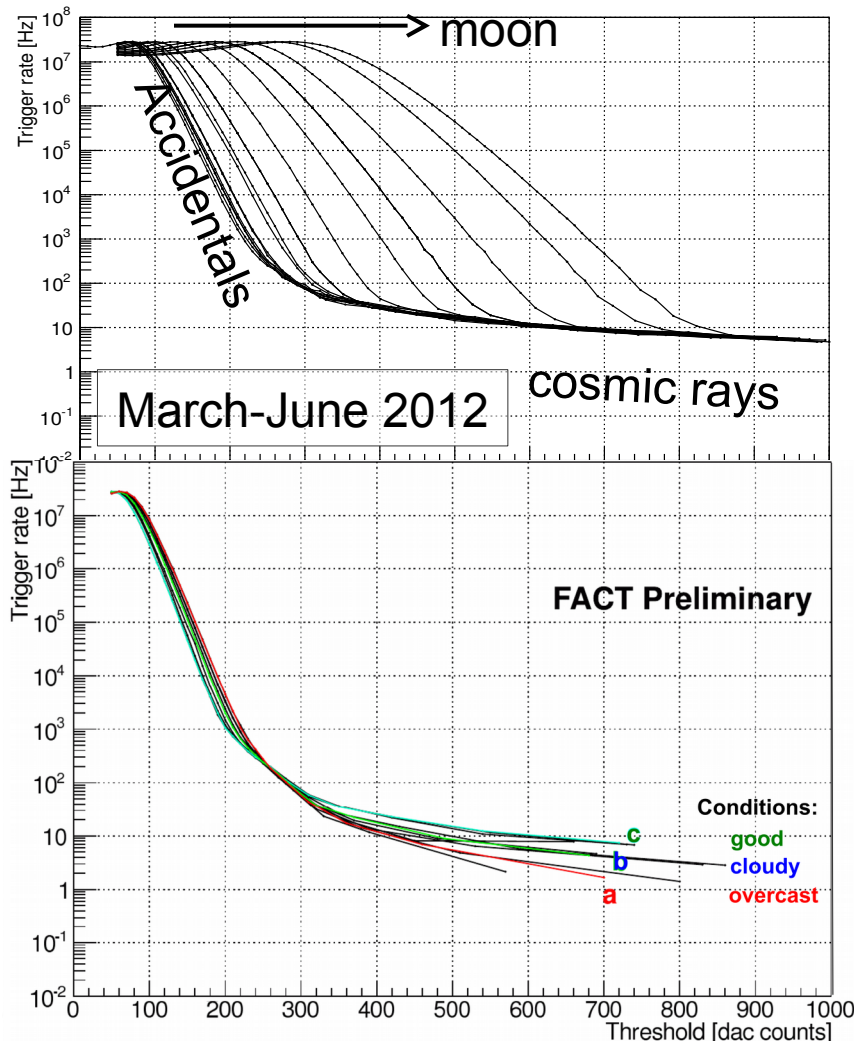

Ratescans show **cosmic ray trigger-rate independent of moon, sensor temperature and age of sensors.**


Bad atmospheric conditions give us a handle on overall efficiency.

# FACT – Stability of 2<sup>nd</sup> order temperature effects

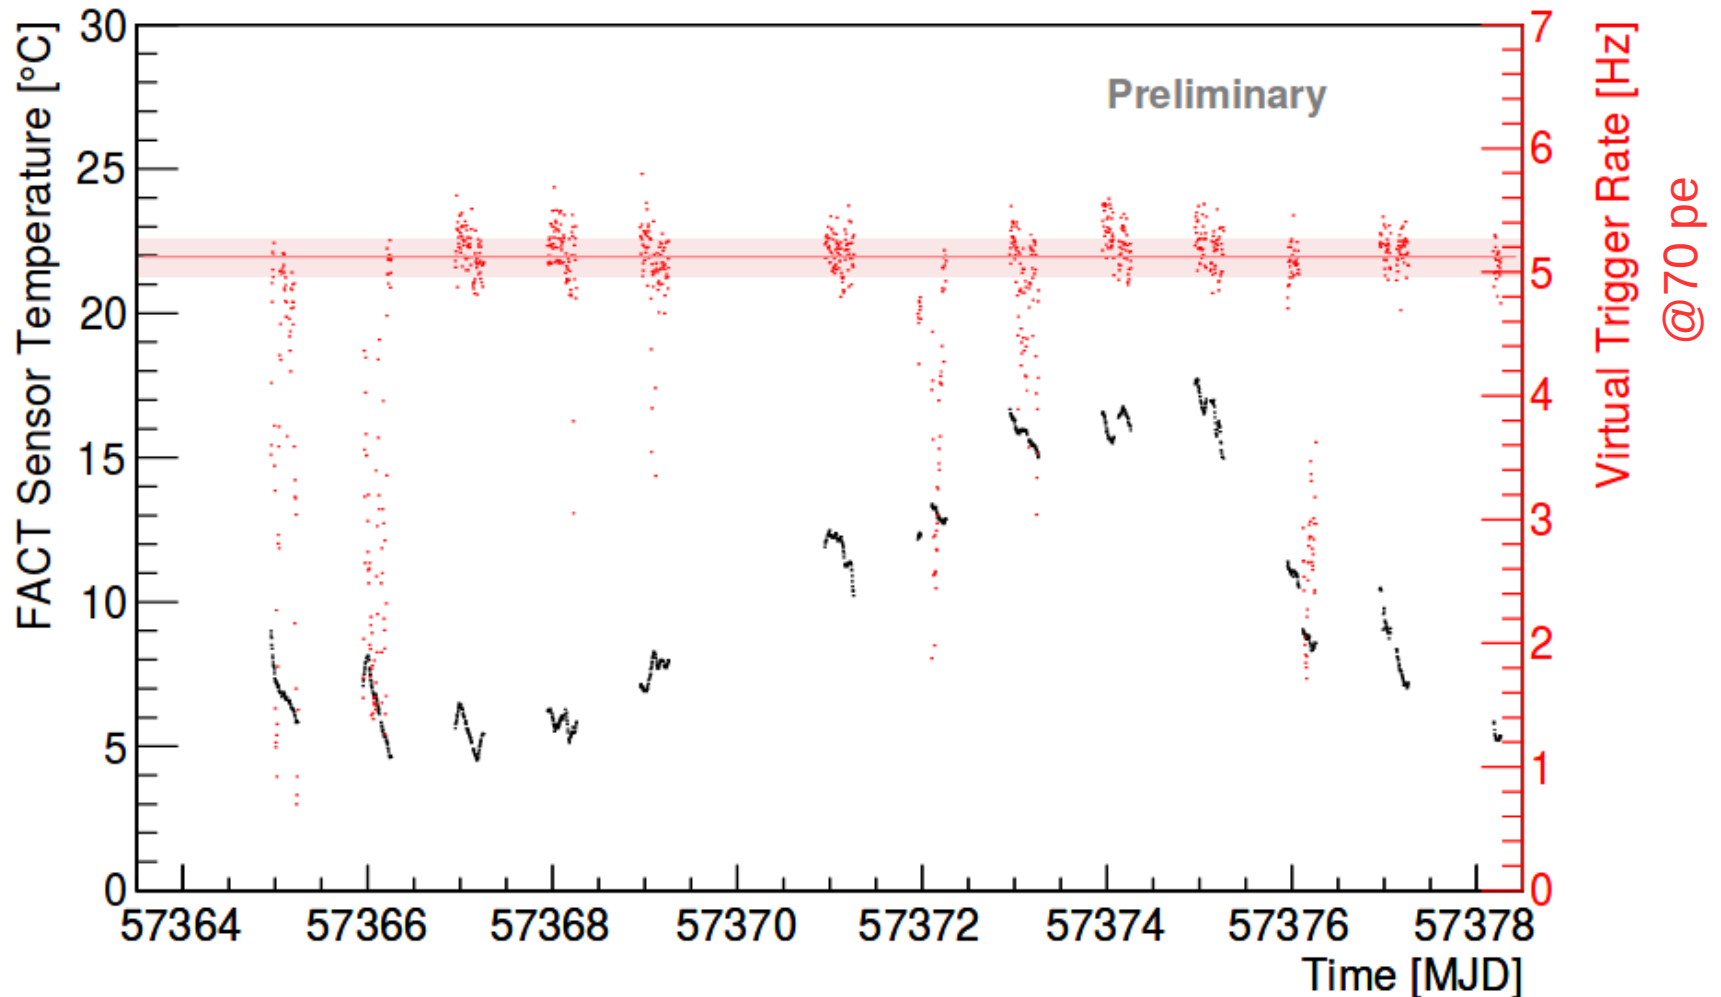

D. Hildebrand et al., Higher Order Temperature Dependence of SiPM used in FACT, PoS(ICRC2017) 778

# FACT – Stability of 2<sup>nd</sup> order temperature effects

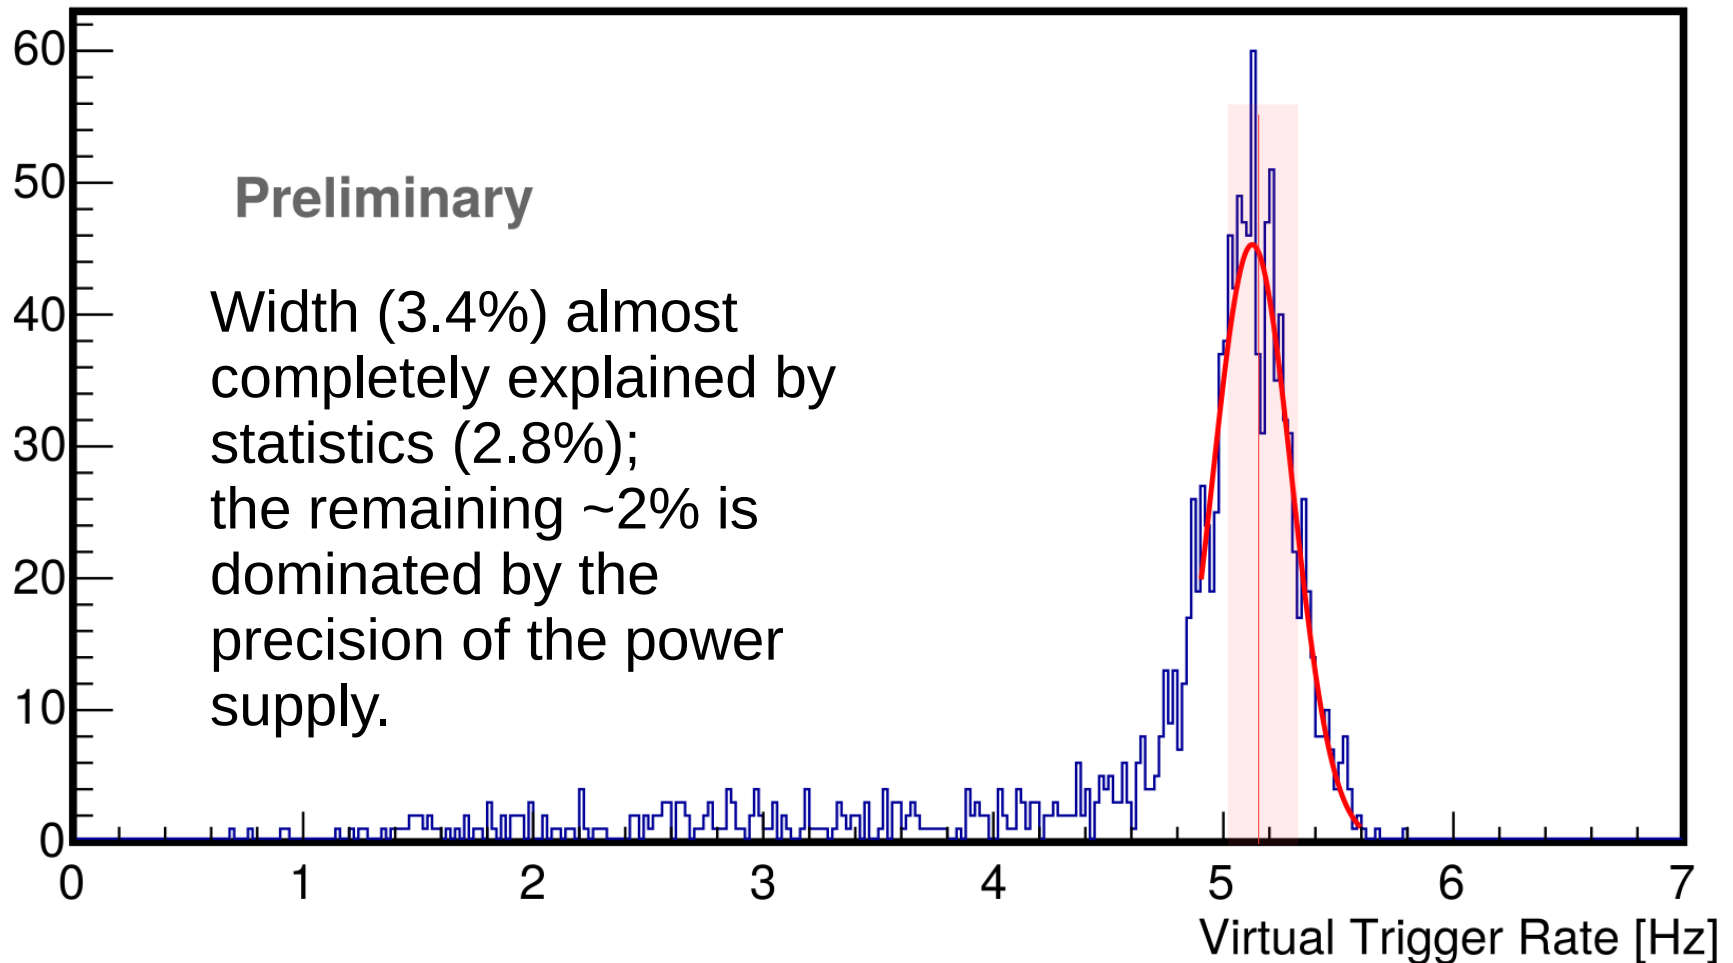


D. Hildebrand et al., Higher Order Temperature Dependence of SiPM used in FACT, PoS(ICRC2017) 778




# ***FACT*** – Longevity



June 23<sup>rd</sup> 2013  
brightest  
fullmoon  
of the year

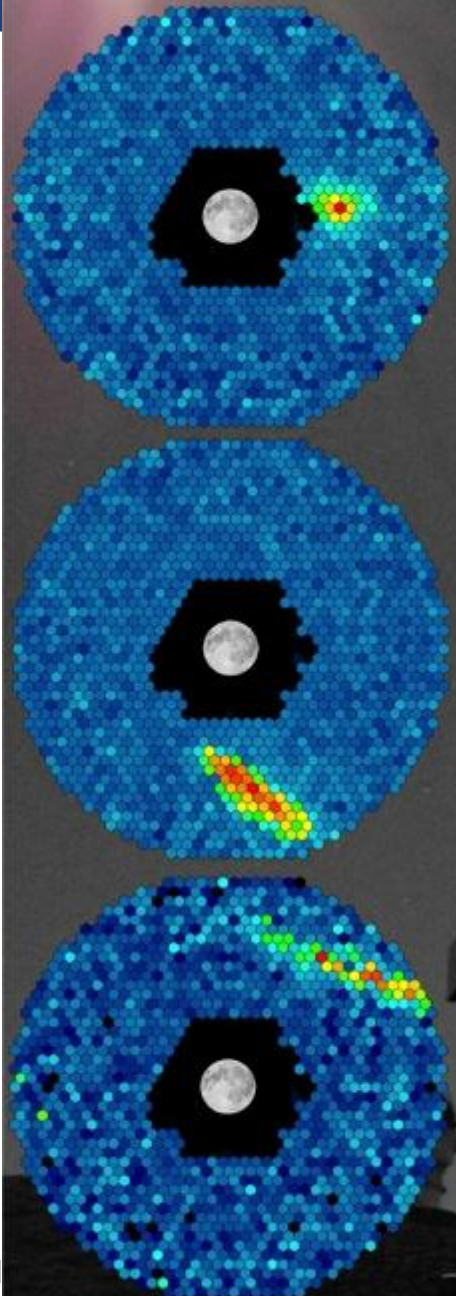

# FACT – Signal & Background

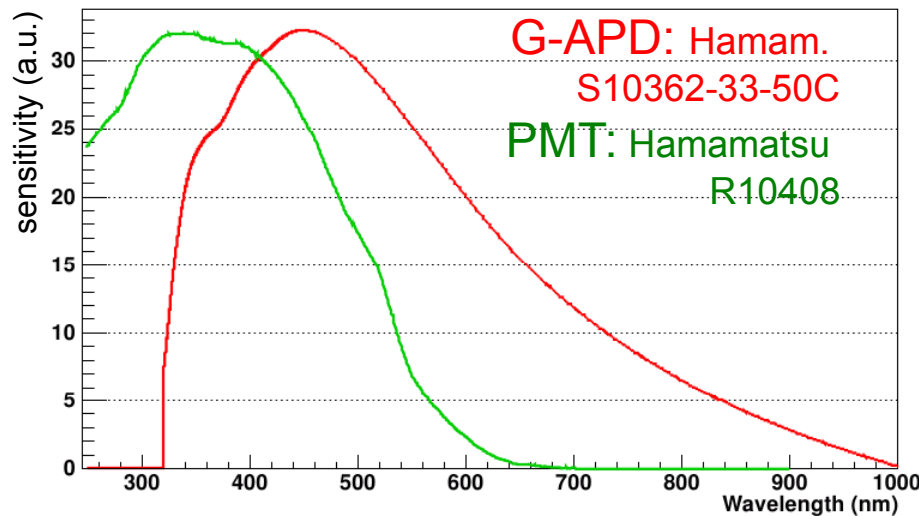
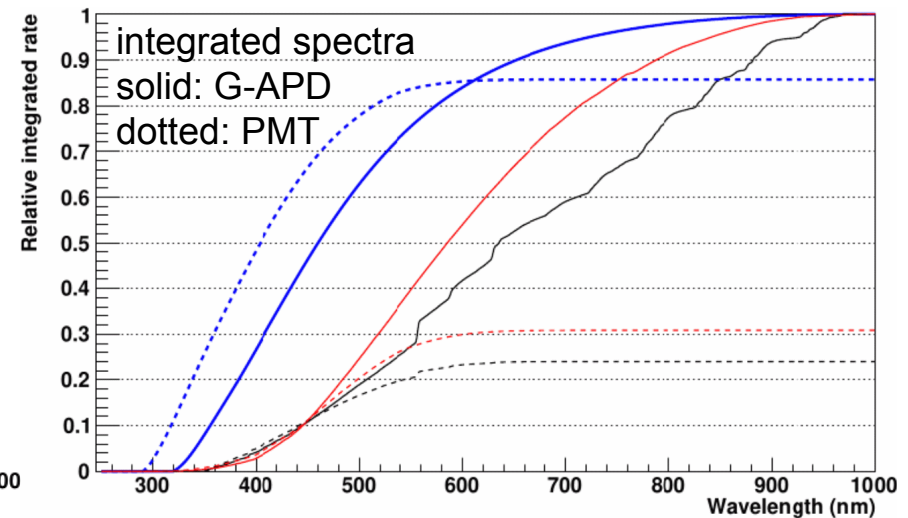
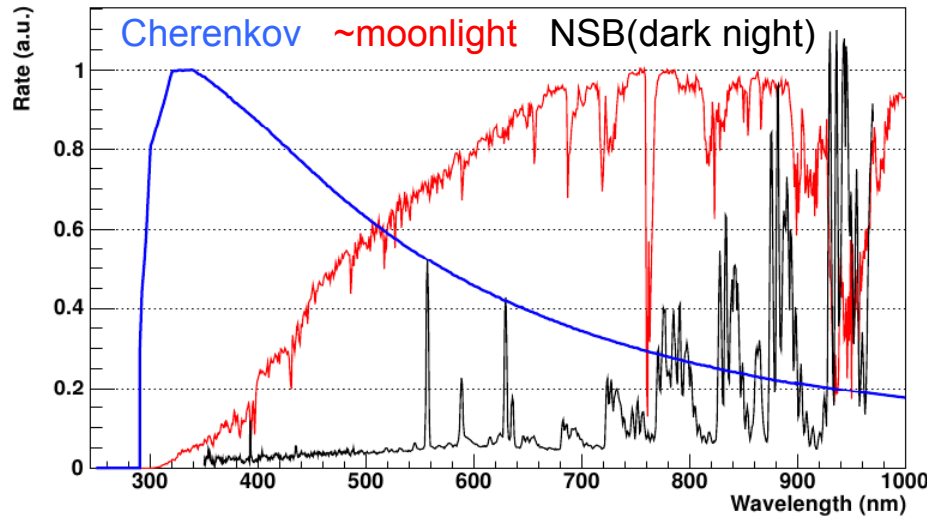


sensitivity curve of the first G-APDs  
not well adjusted to Cherenkov spect.

collect much more NSB (and moon)  
than optimized PMTs


Nevertheless, FACT can operate  
with lot of moonlight without aging

# FACT – Signal & Background

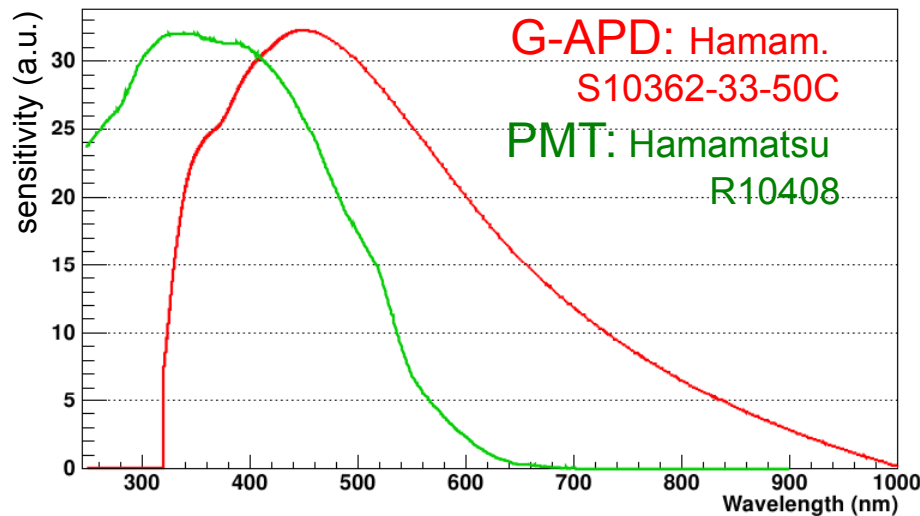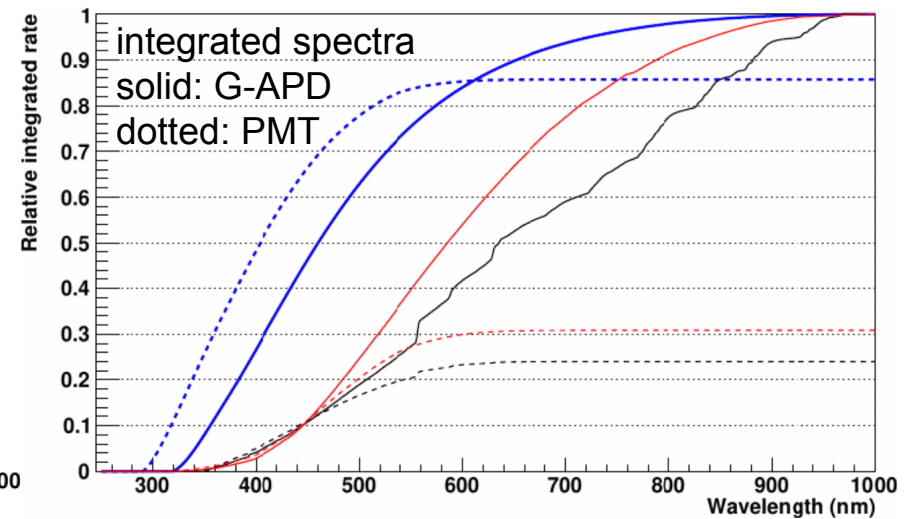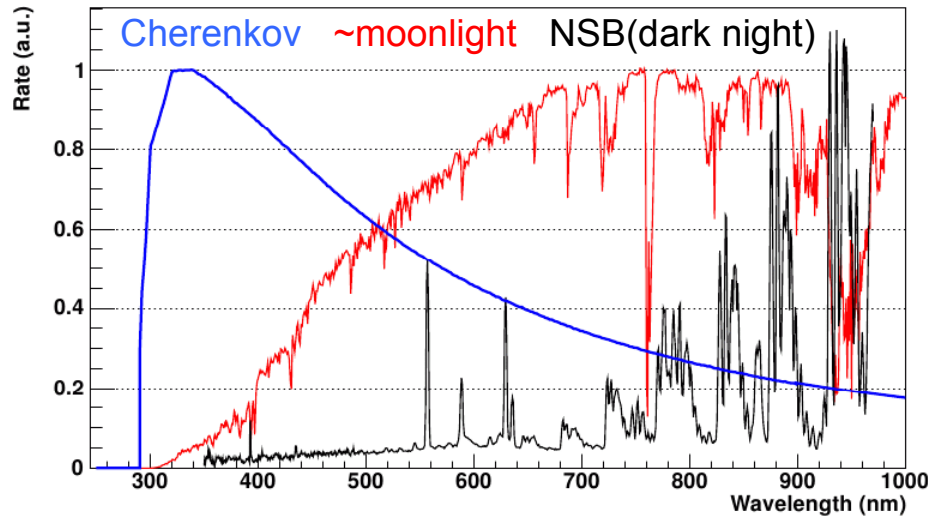

Today exist G-APDs, that are much better adapted to the needs of IACTs.

## FACT – Collected Charge

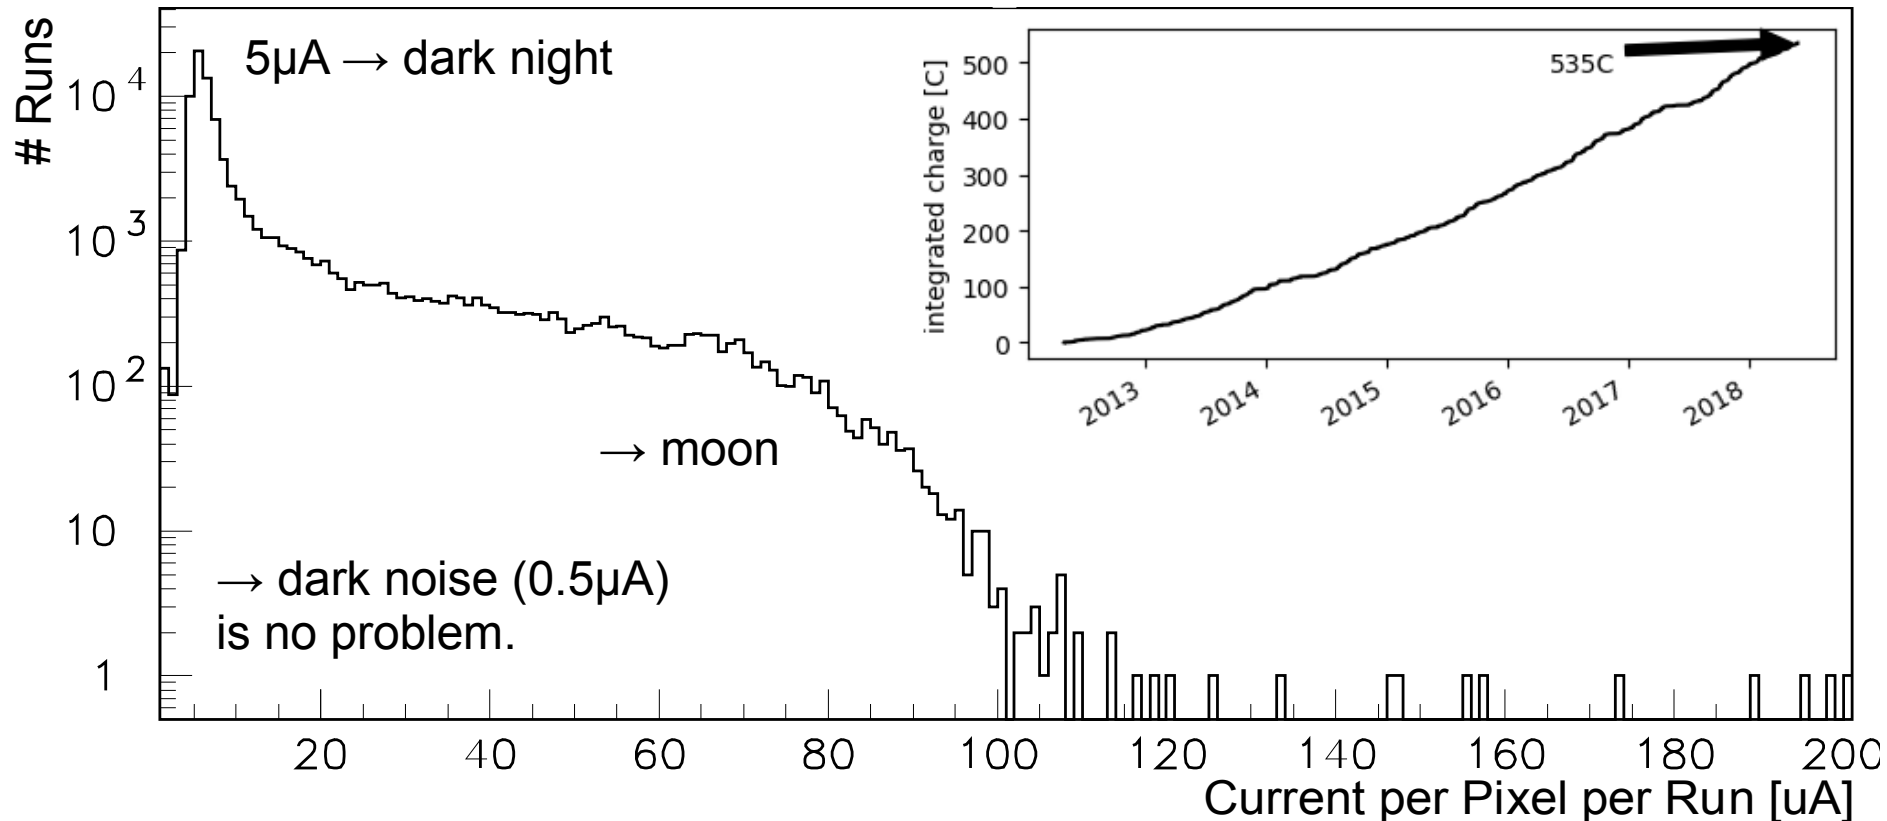

integrating over time, divide by dark-night DC (5μA) for each sensor:  
**collected same charge as in ~30k hours dark night observations**

dark noise: ~0.5μA (laboratory)


➔ **collected same charge as in ~34 years continuous op. in laboratory**



# ***FACT*** – Automation

# FACT – Automation



onsite  
data-  
taking  
(2011)

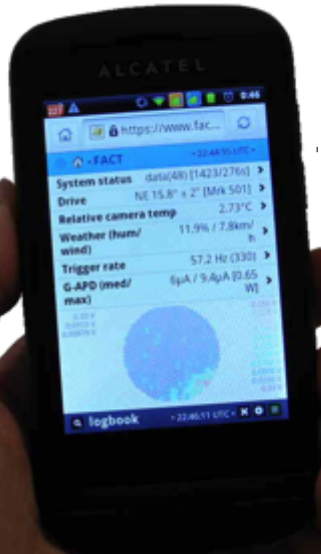

remote data-taking  
from anywhere  
(since late 2012)

***follow us at <http://fact-project.org/smartfact>***

# FACT – Automation

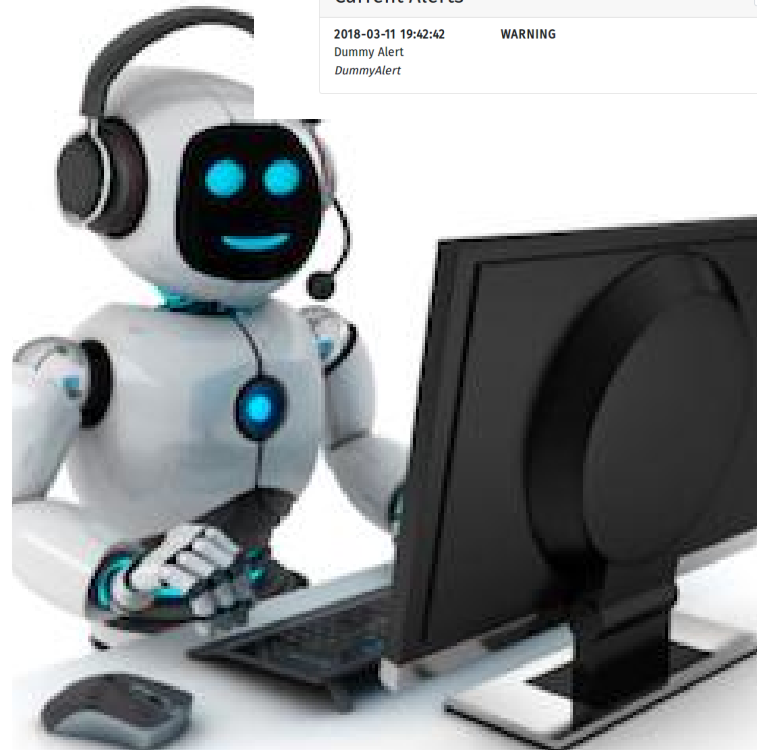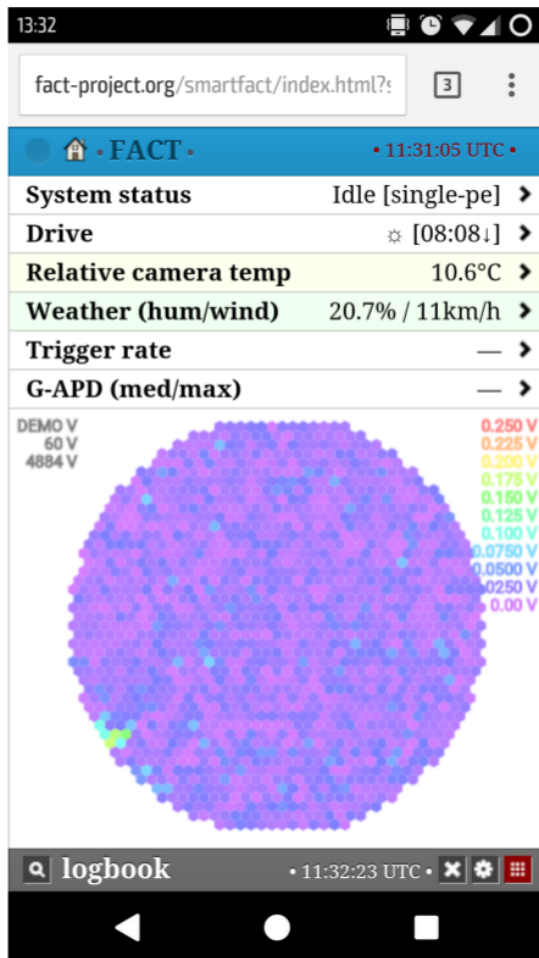

Home 08:29:24 UTC

FACT ShiftHelper Webinterface

heartbeatMonitor	shiftHelperHeartbeat
2018-03-12 08:28:33 ✓	2018-03-12 08:28:29 ✓

Current Alerts

2018-03-11 19:42:42	WARNING
Dummy Alert	



Evening:  
Arm  
System

Night:  
Sleep


Morning:  
Parked?

**Calls shifter if human interaction is needed**

# ***FACT* – Science**

## FACT – Science

long-term monitoring of bright variable TeV sources and sending alerts:

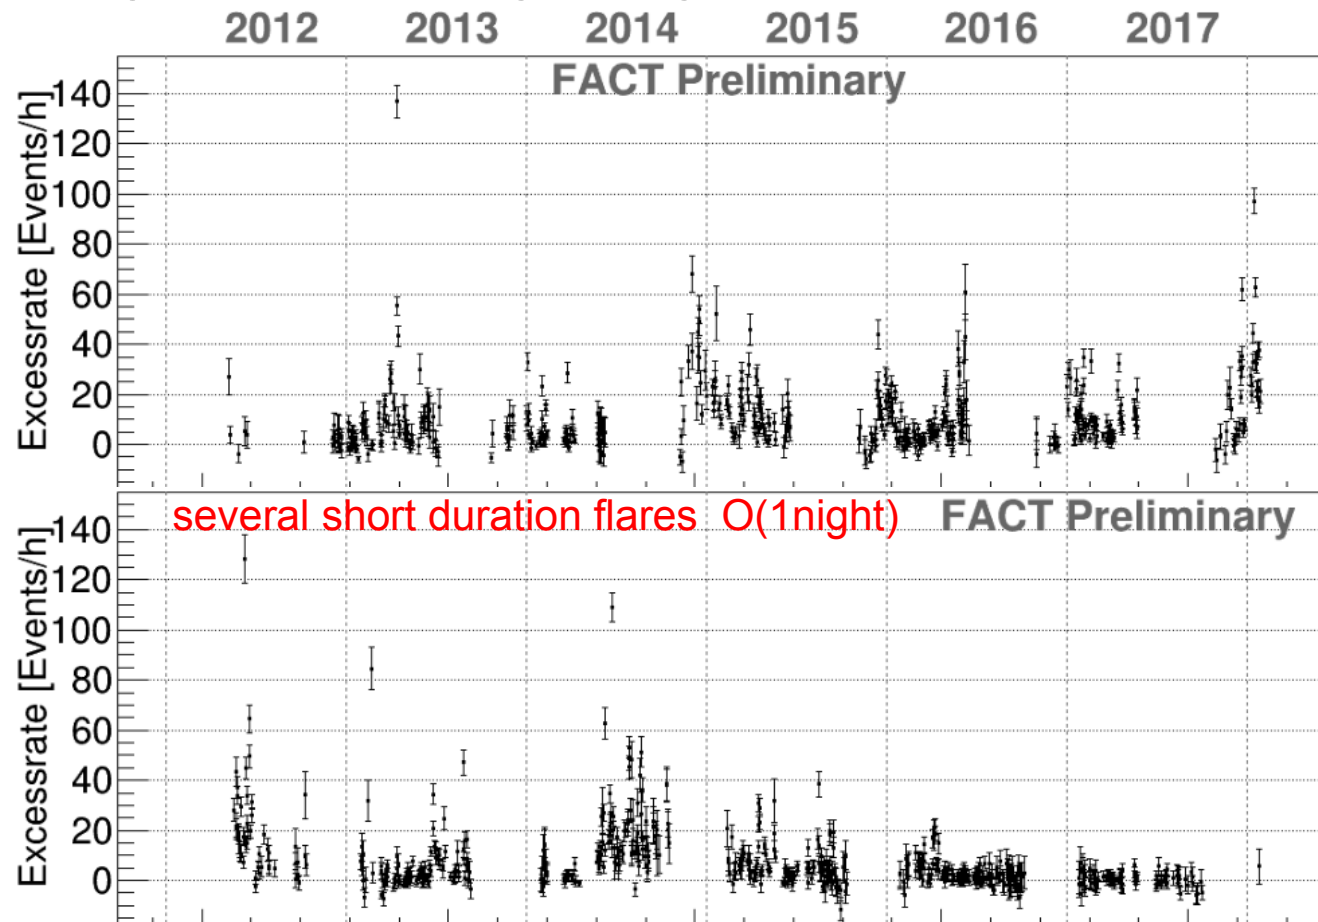

Mrk 421


Mrk 501

(daily binning)

public access to QLA results: <http://fact-project.org/monitoring>

# FACT – Science

long-term monitoring of bright variable TeV sources and sending alerts:

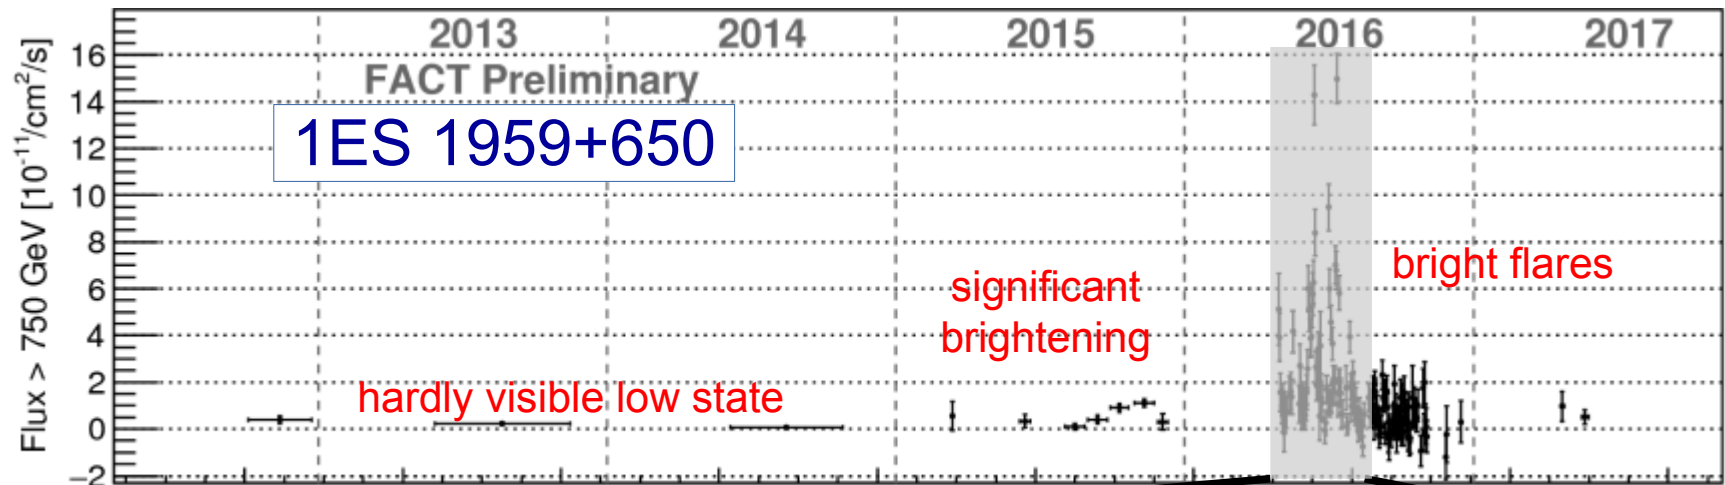

Flaring  
Activity  
2016





# ***FACT*** – Outlook

# FACT – Impact

**pre-FACT: all CTA  
designs based on  
(multianode) PMTs**  
[Exp.Astr. 32.3(2011)]



ASTRI



SST-1M




GCT



SCT




FACT

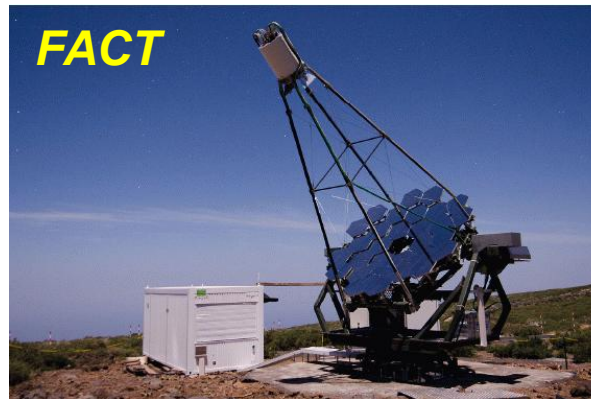

And non CTA IACTs like:

M@TE

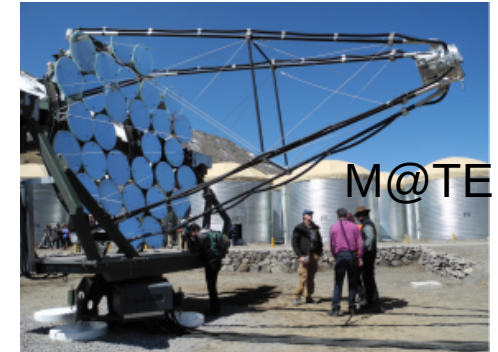

*plus projects for future  
MST and LST cameras*

**post-FACT: many  
SiPM-based  
CTA projects.**

**Latest SiPM much better than those used in FACT  
→ expect significantly better performances**

FAMOUS



## FACT – Conclusion

- G-APDs are excellent sensors for IACTs
- temperature dependence can easily be corrected for
- (moderate) dark noise and crosstalk deliver an excellent calibration device for free (no need for lightpulsers etc.)
- stability allows to predict trigger rates; allows to measure quality of the atmosphere; **ideal for long-term monitoring**

## **FACT – Conclusion**

- G-APDs are excellent sensors for IACTs
- temperature dependence can easily be corrected for
- (moderate) dark noise and crosstalk deliver an excellent calibration device for free (no need for lightpulsers etc.)
- stability allows to predict trigger rates; allows to measure quality of the atmosphere; **ideal for long-term monitoring**

**We all know:**

**G-APD are not a 1-to-1 replacement of PMT**

**thank you for  
your attention**