


DIRC 2013, September 4-6, 2013



# The Belle II PID System


Peter Križan

*University of Ljubljana and J. Stefan Institute*



**University  
of Ljubljana**

**"Jožef Stefan"  
Institute**



# Contents

---

Belle II detector


PID systems

- Barrel: TOP
- Endcap: ARICH




# KEKB to SuperKEKB





Colliding bunches



New superconducting / permanent final focusing quads near the IP

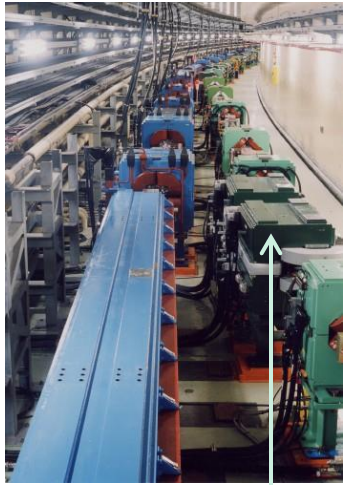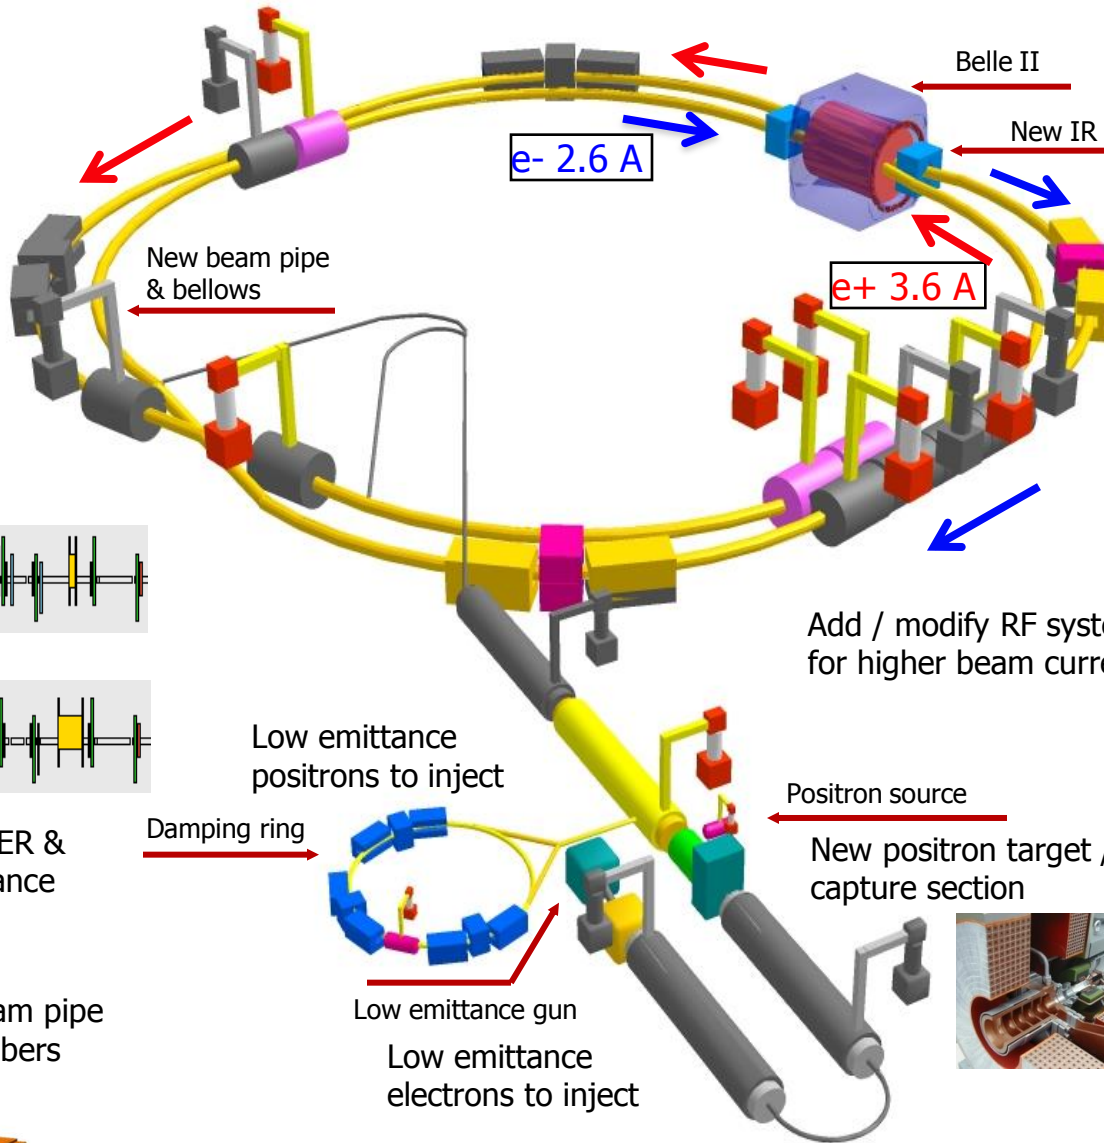



Replace short dipoles with longer ones (LER)



Redesign the lattices of HER & LER to squeeze the emittance

TiN-coated beam pipe with antechambers

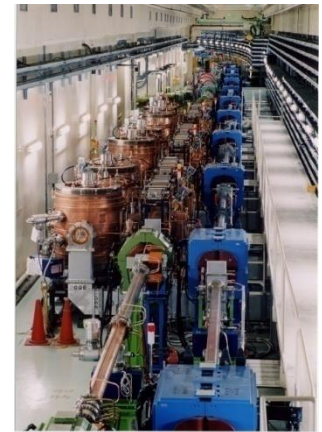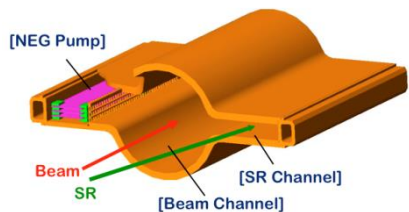



**To obtain x40 higher luminosity**

# Need to build a new detector to handle higher backgrounds


Critical issues at  $L = 8 \times 10^{35}/\text{cm}^2/\text{sec}$

- ▶ **Higher background ( $\times 10\text{-}20$ )**
  - radiation damage and occupancy
  - fake hits and pile-up noise in the EM
- ▶ **Higher event rate ( $\times 10$ )**
  - higher rate trigger, DAQ and computing
- ▶ **Require special features**
  - low  $p \mu$  identification  $\leftarrow s\mu\mu$  recon. eff.
  - hermeticity  $\leftarrow \nu$  "reconstruction"


Have to employ and develop new technologies to make such an apparatus work!

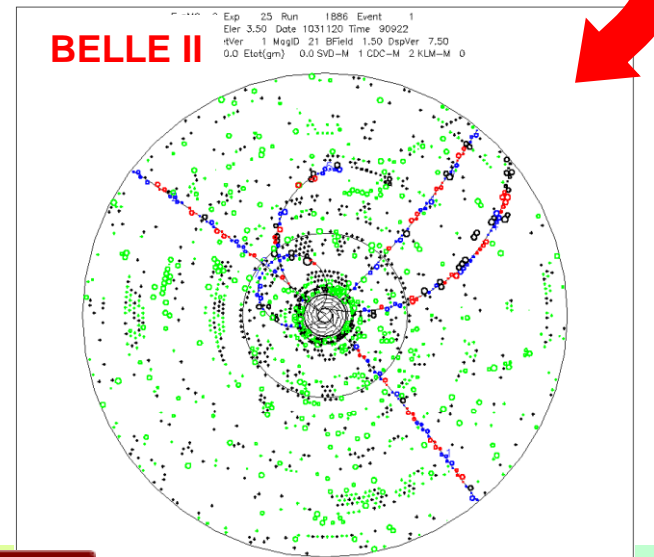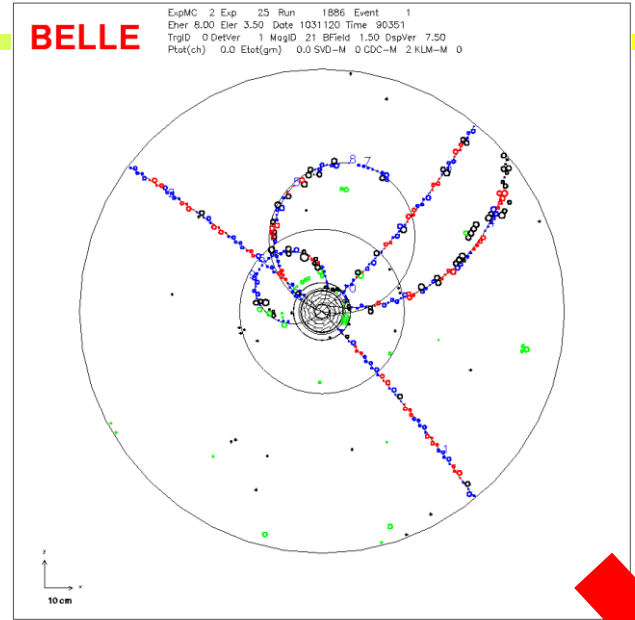

# Belle II Detector

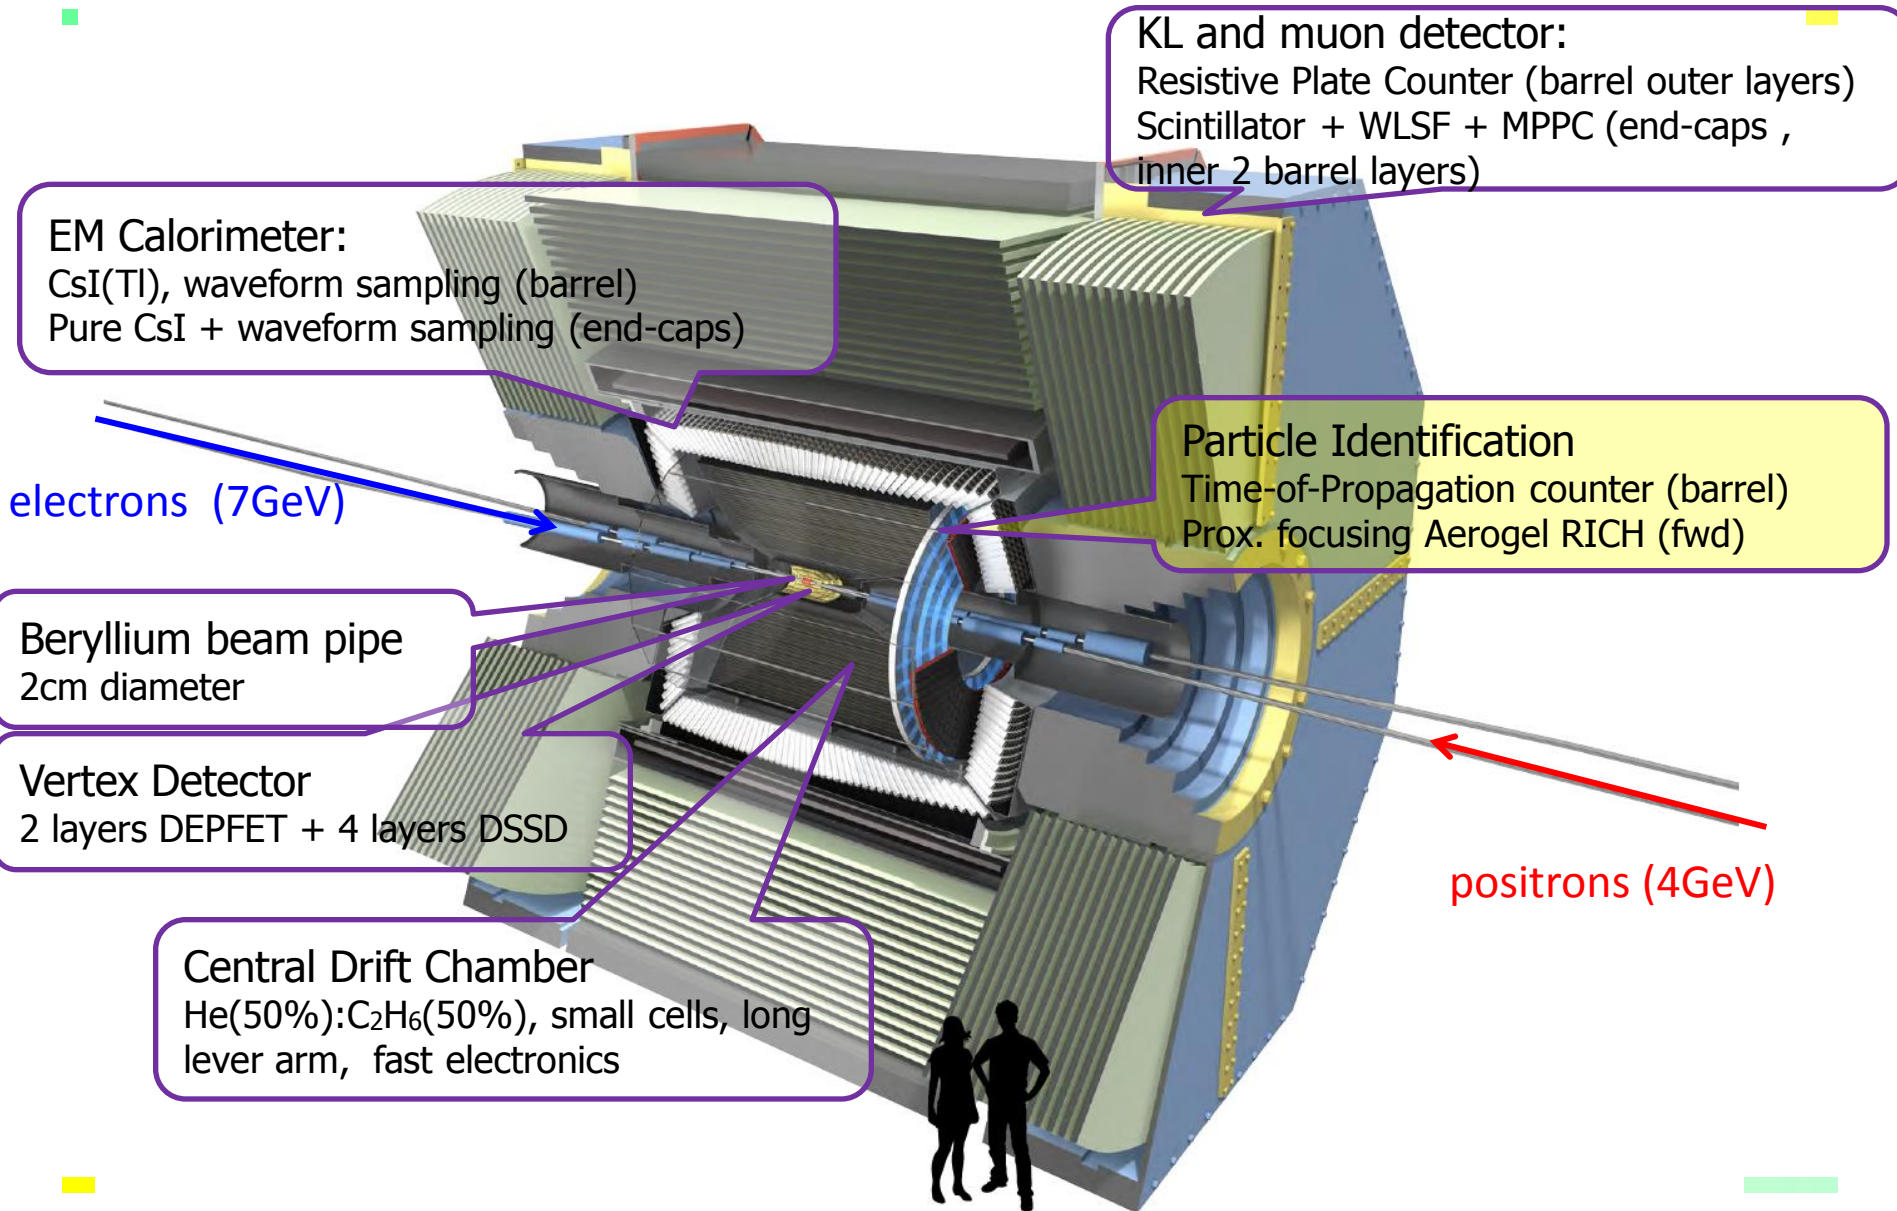

# Belle II Detector (in comparison with Belle)

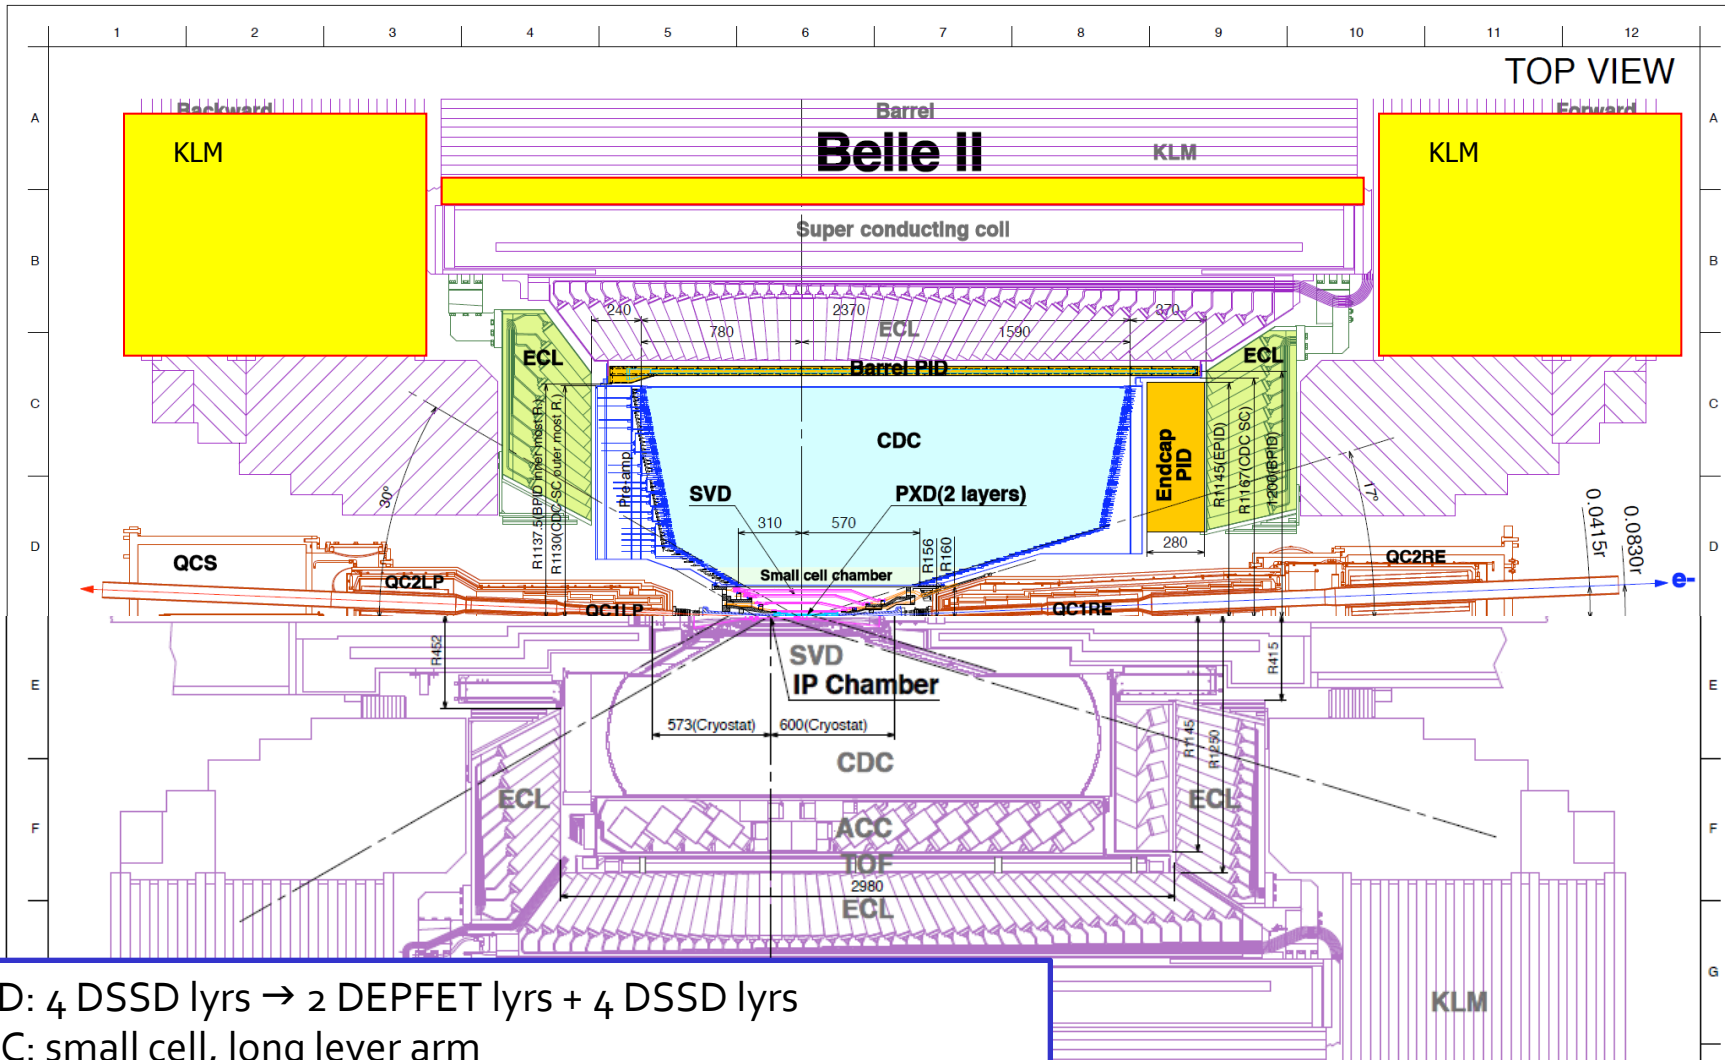


SVD: 4 DSSD lyrs → 2 DEPFET lyrs + 4 DSSD lyrs  
 CDC: small cell, long lever arm  
 ACC+TOF → TOP+A-RICH  
 ECL: waveform sampling (+pure CsI for endcaps)  
 KLM: RPC → Scintillator +MPPC (endcaps, barrel inner 2 lyrs)



**In colour: new or upgraded components**

# Particle Identification Devices

## Barrel PID: Time of Propagation Counter (TOP)

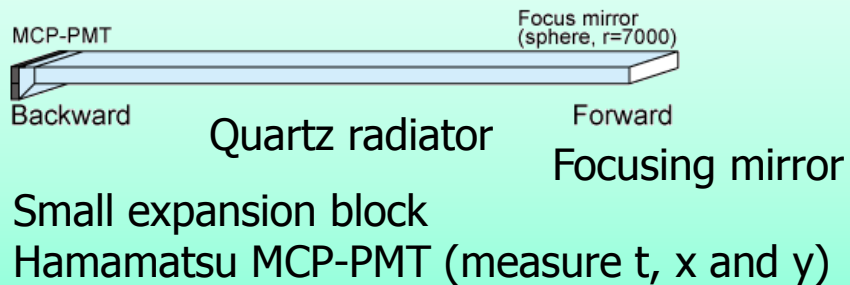


## Endcap PID: Aerogel RICH (ARICH)

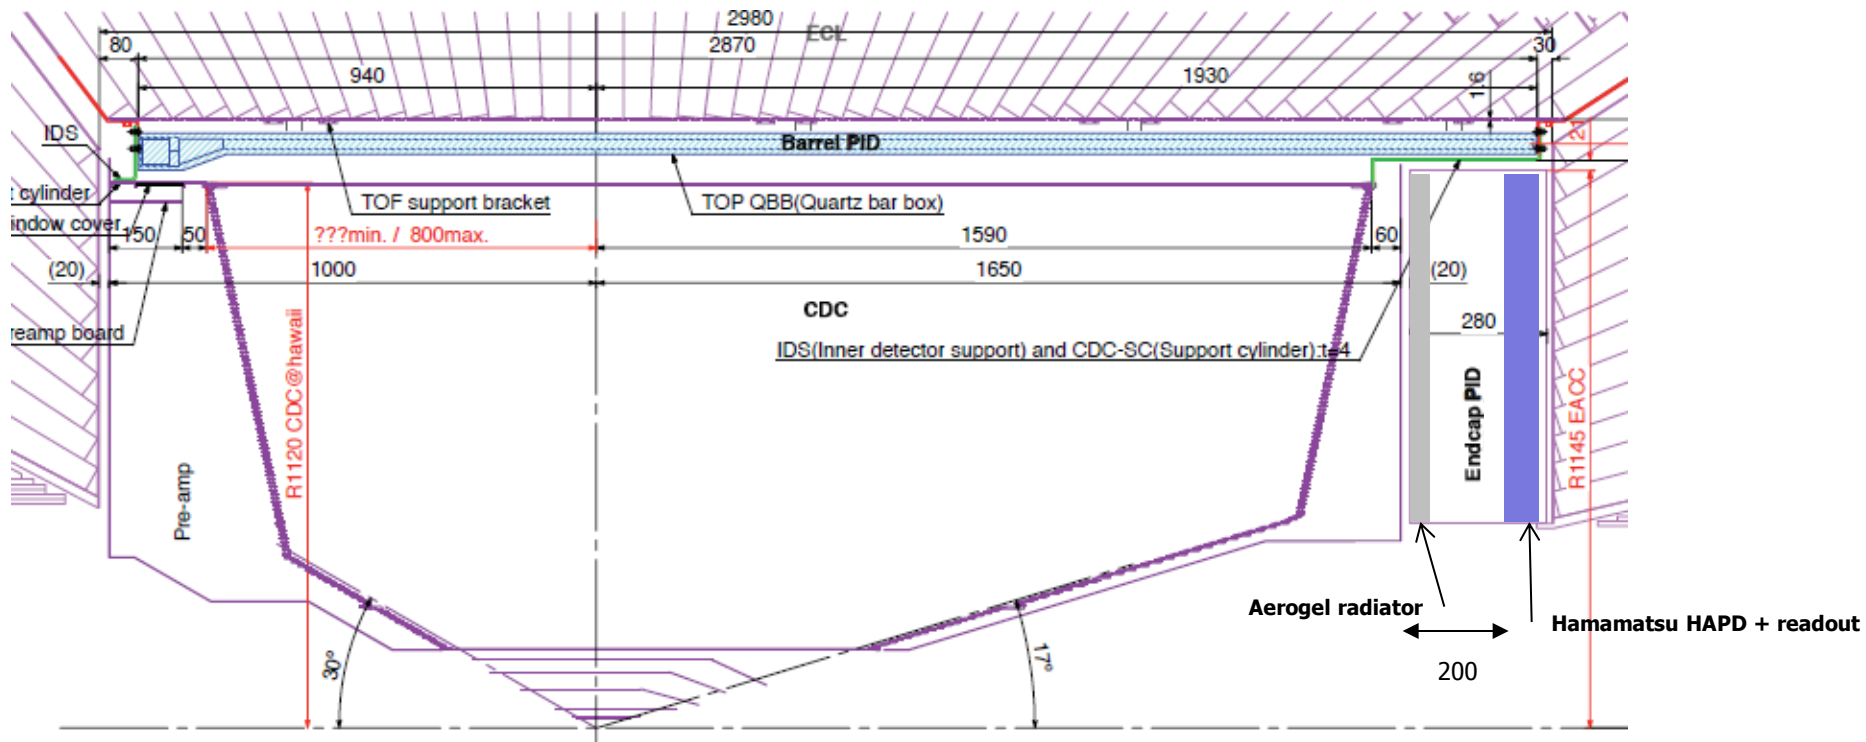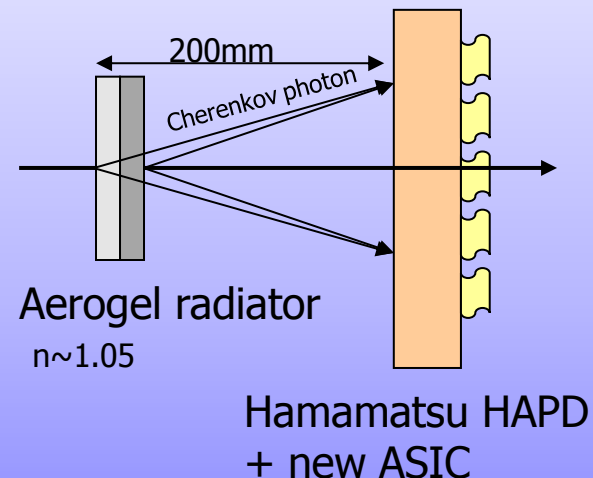



# Belle upgrade – side view

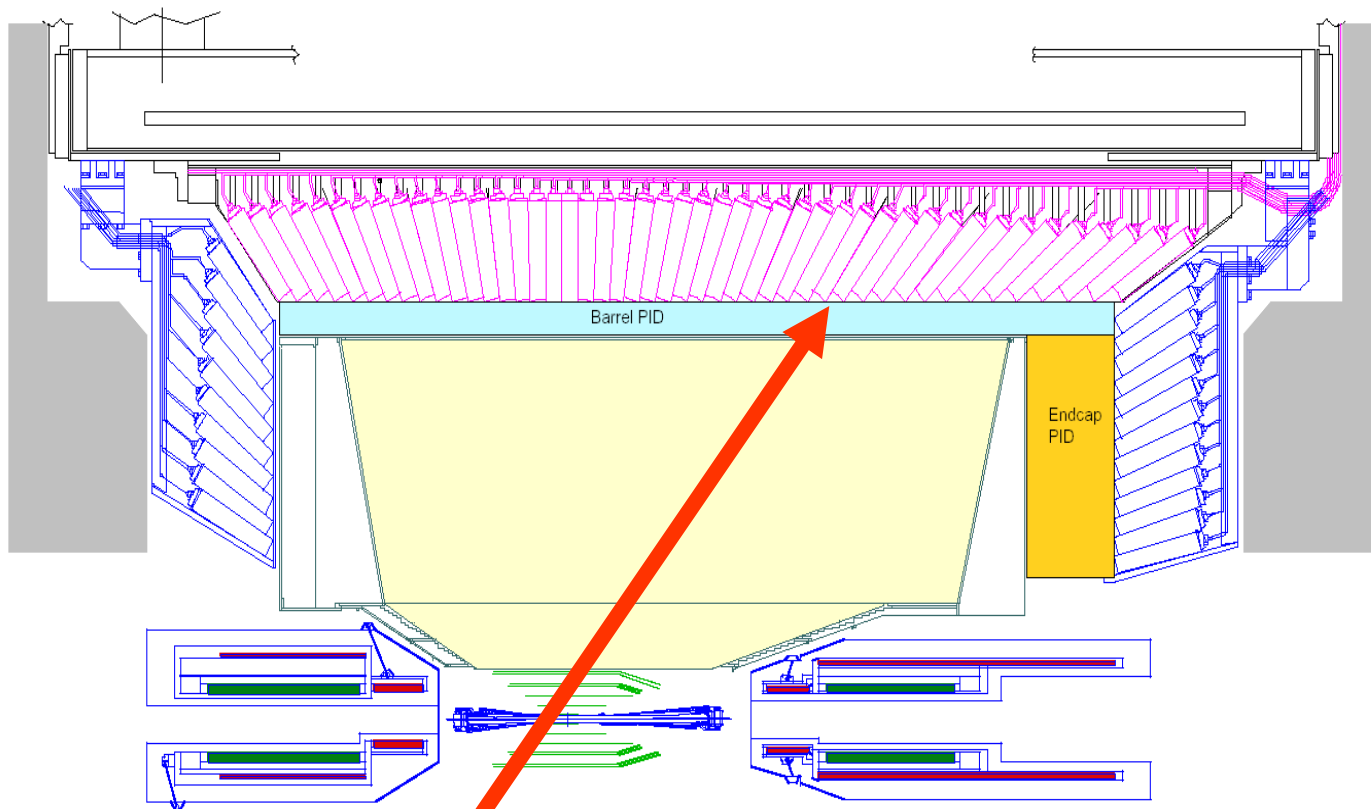

Two new particle ID devices, both RICHes:

Barrel: Time-of-propagation counter (TOP) counter


Endcap: proximity focusing RICH



# Barrel PID: Time of propagation (TOP) counter

Cherenkov ring imaging with **precise time measurement**.

Device uses internal reflection of Cherenkov ring images from quartz like the BaBar DIRC

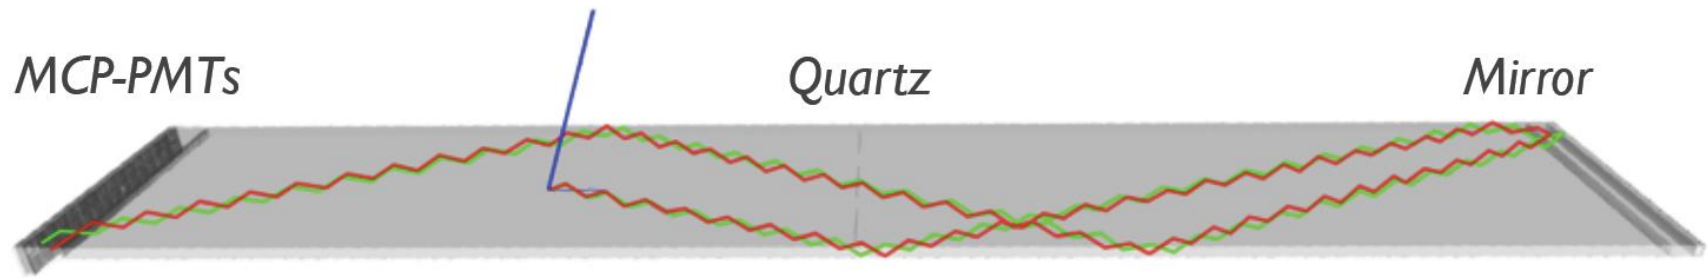

*Example of Cherenkov-photon paths for 2 GeV/c  $\pi^\pm$  and  $K^\pm$ .*

Reconstruct Cherenkov angle from two hit coordinates and the time of propagation of the photon


Quartz radiator (2cm)

**Photon detector (MCP-PMT)**


Excellent time resolution  $\sim 40$  ps

Single photon sensitivity in 1.5 T


Fast read-out electronics

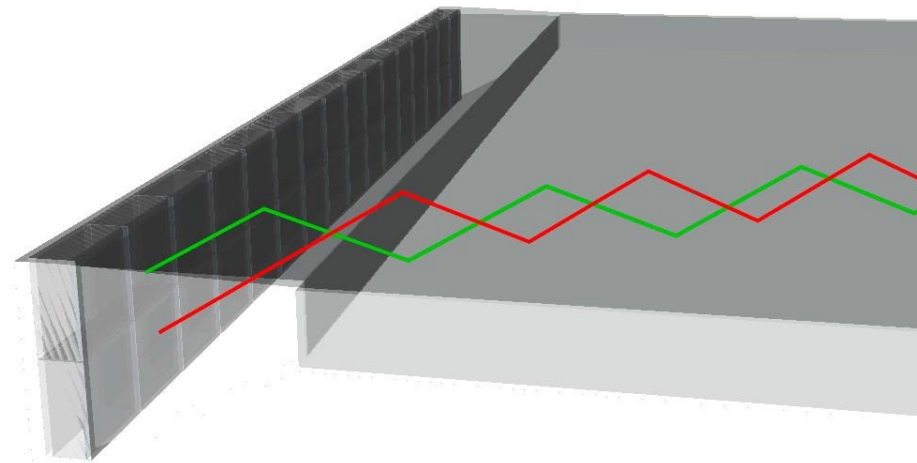

# TOP image

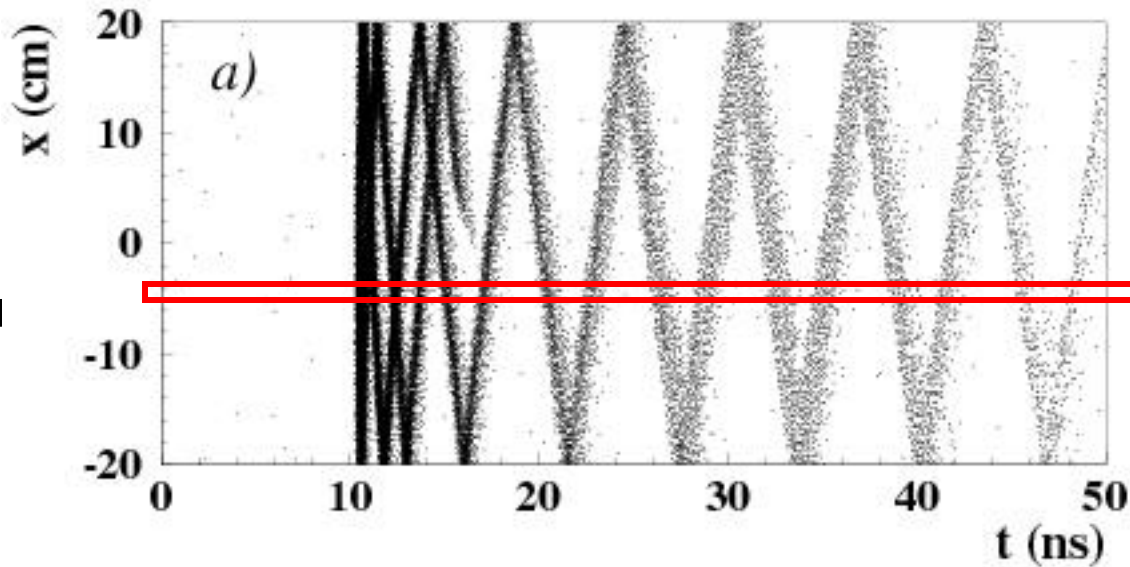


Pattern in the coordinate-time space ('ring') of a **pion** hitting a quartz bar with  $\sim 80$  MAPMT channels

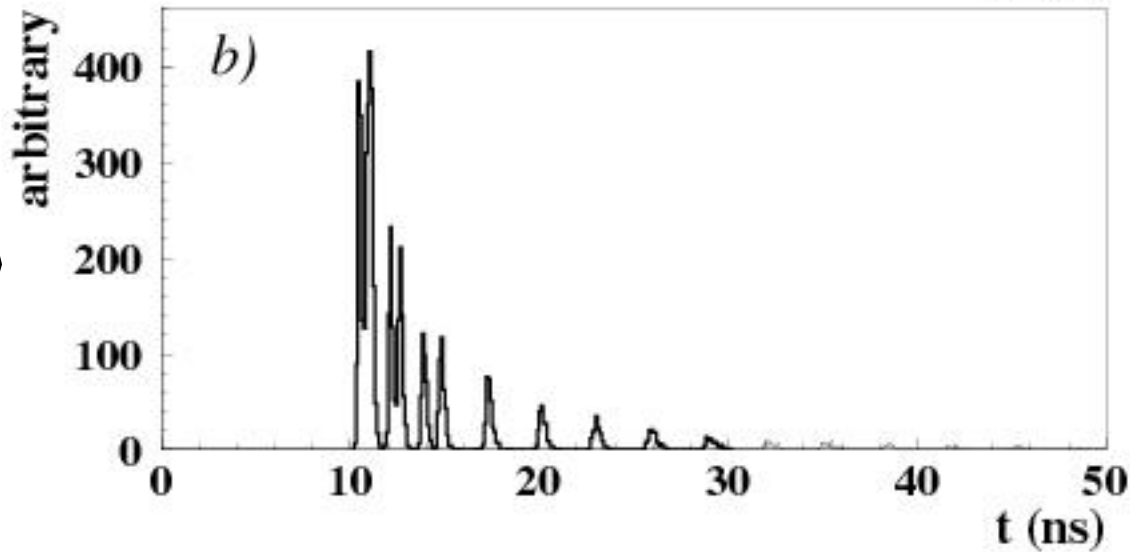

Time distribution of signals recorded by one of the PMT channels: different for  $\pi$  and K ( $\sim$ shifted in time)

# Quartz bar

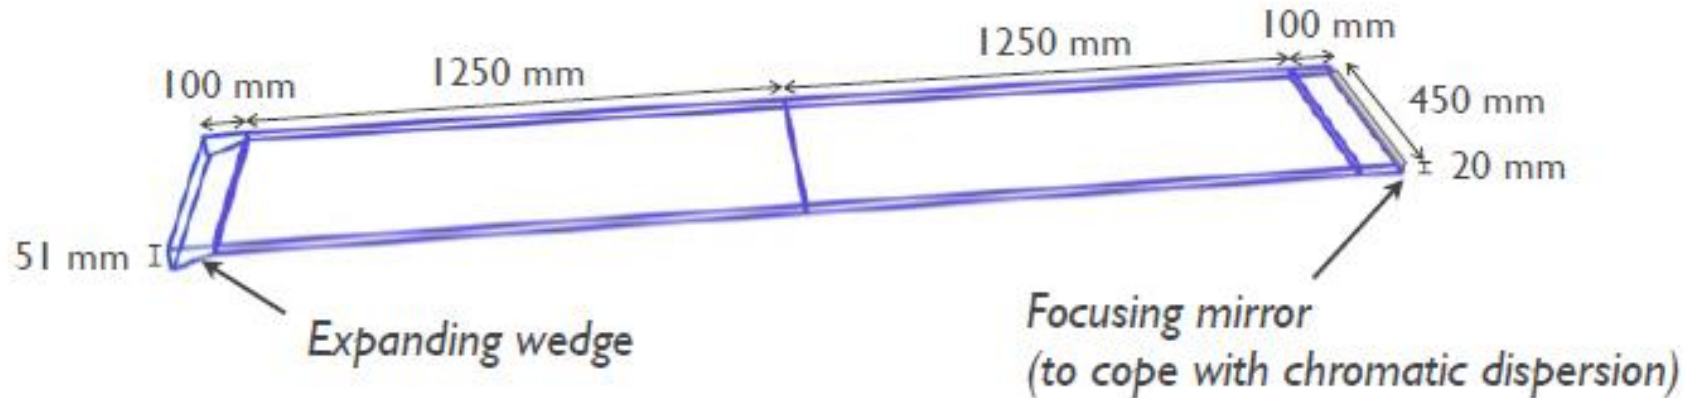

32 quartz bars are needed for the full Belle-II detector,  $20 \times 450 \times 1250 \text{ mm}^3$ , two per module, plus mirror and wedge.


The quartz needs to be of high quality to ensure that photon losses are minimised, and that the Cherenkov photon reflection angles are maintained.

Quartz Property	Requirement
Flatness	$< 6.3 \mu\text{m}$
Perpendicularity	$< 20 \text{ arcsec}$
Parallelism	$< 4 \text{ arcsec}$
Roughness	$< 0.5 \text{ nm (RMS)}$
Bulk transmittance	$> 98\%/\text{m}$
Surface reflectance	$> 99.9\%/\text{reflection}$

# Photon detector: SL10 MCP PMT




square shape

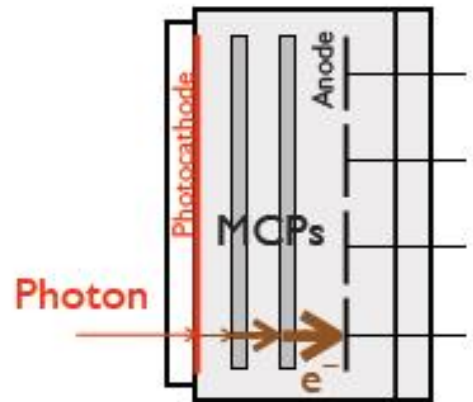

cross-sectional view




MCP


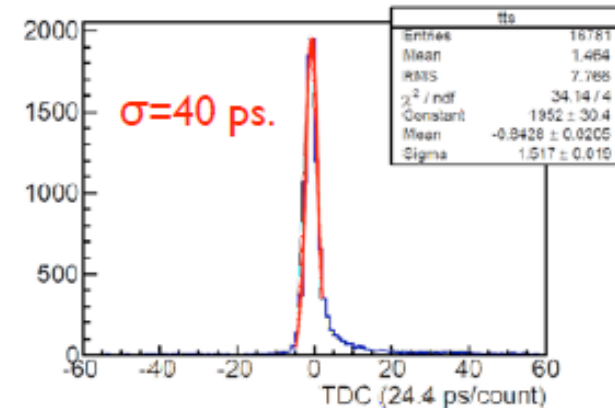


- MCP-PMT has an active area of  $\sim 23 \times 23 \text{ mm}^2$
- Photocathode: NaKSbCs
- Readout via 4·4 channels – 512 total channels per TOP module.
- PMTs required to have a peak quantum efficiency of  $>24\%$ , and a collection efficiency of  $\sim 55\%$ .
- Intrinsic transit time spread:  $\sim 40 \text{ ps.}$

# Read-out electronics

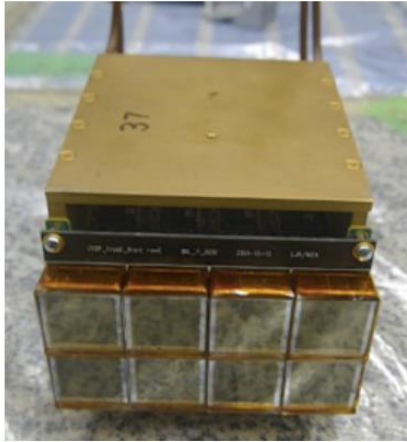

Currently-tested version of the ASIC: **IRS3B**

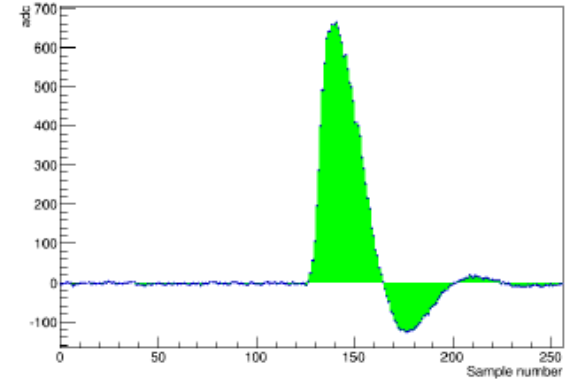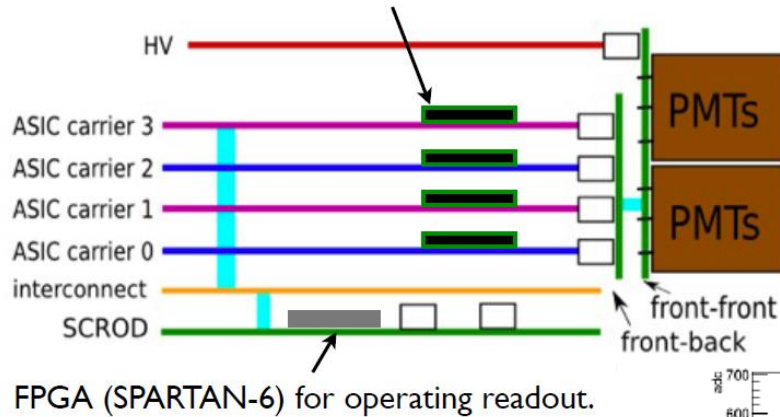

Based on a waveform-sampling ASIC


$4 \times 10^9$  samples / sec. Chip intrinsic time resolution of  $<25$  psec.

Calibration of the time and the charge requires a significant learning curve.




G. Varner, "Experience with the first generation deep sampling ASICs IRS and BLAB3", Workshop on Timing Detectors: Electronics, Medical and Part. Phys. Appl., Cracow, 2010.

G. Varner, "Deeper Sampling CMOS Transient Waveform Recording ASICs", TIPP 2011

# IRS ASIC-based Readout Overview

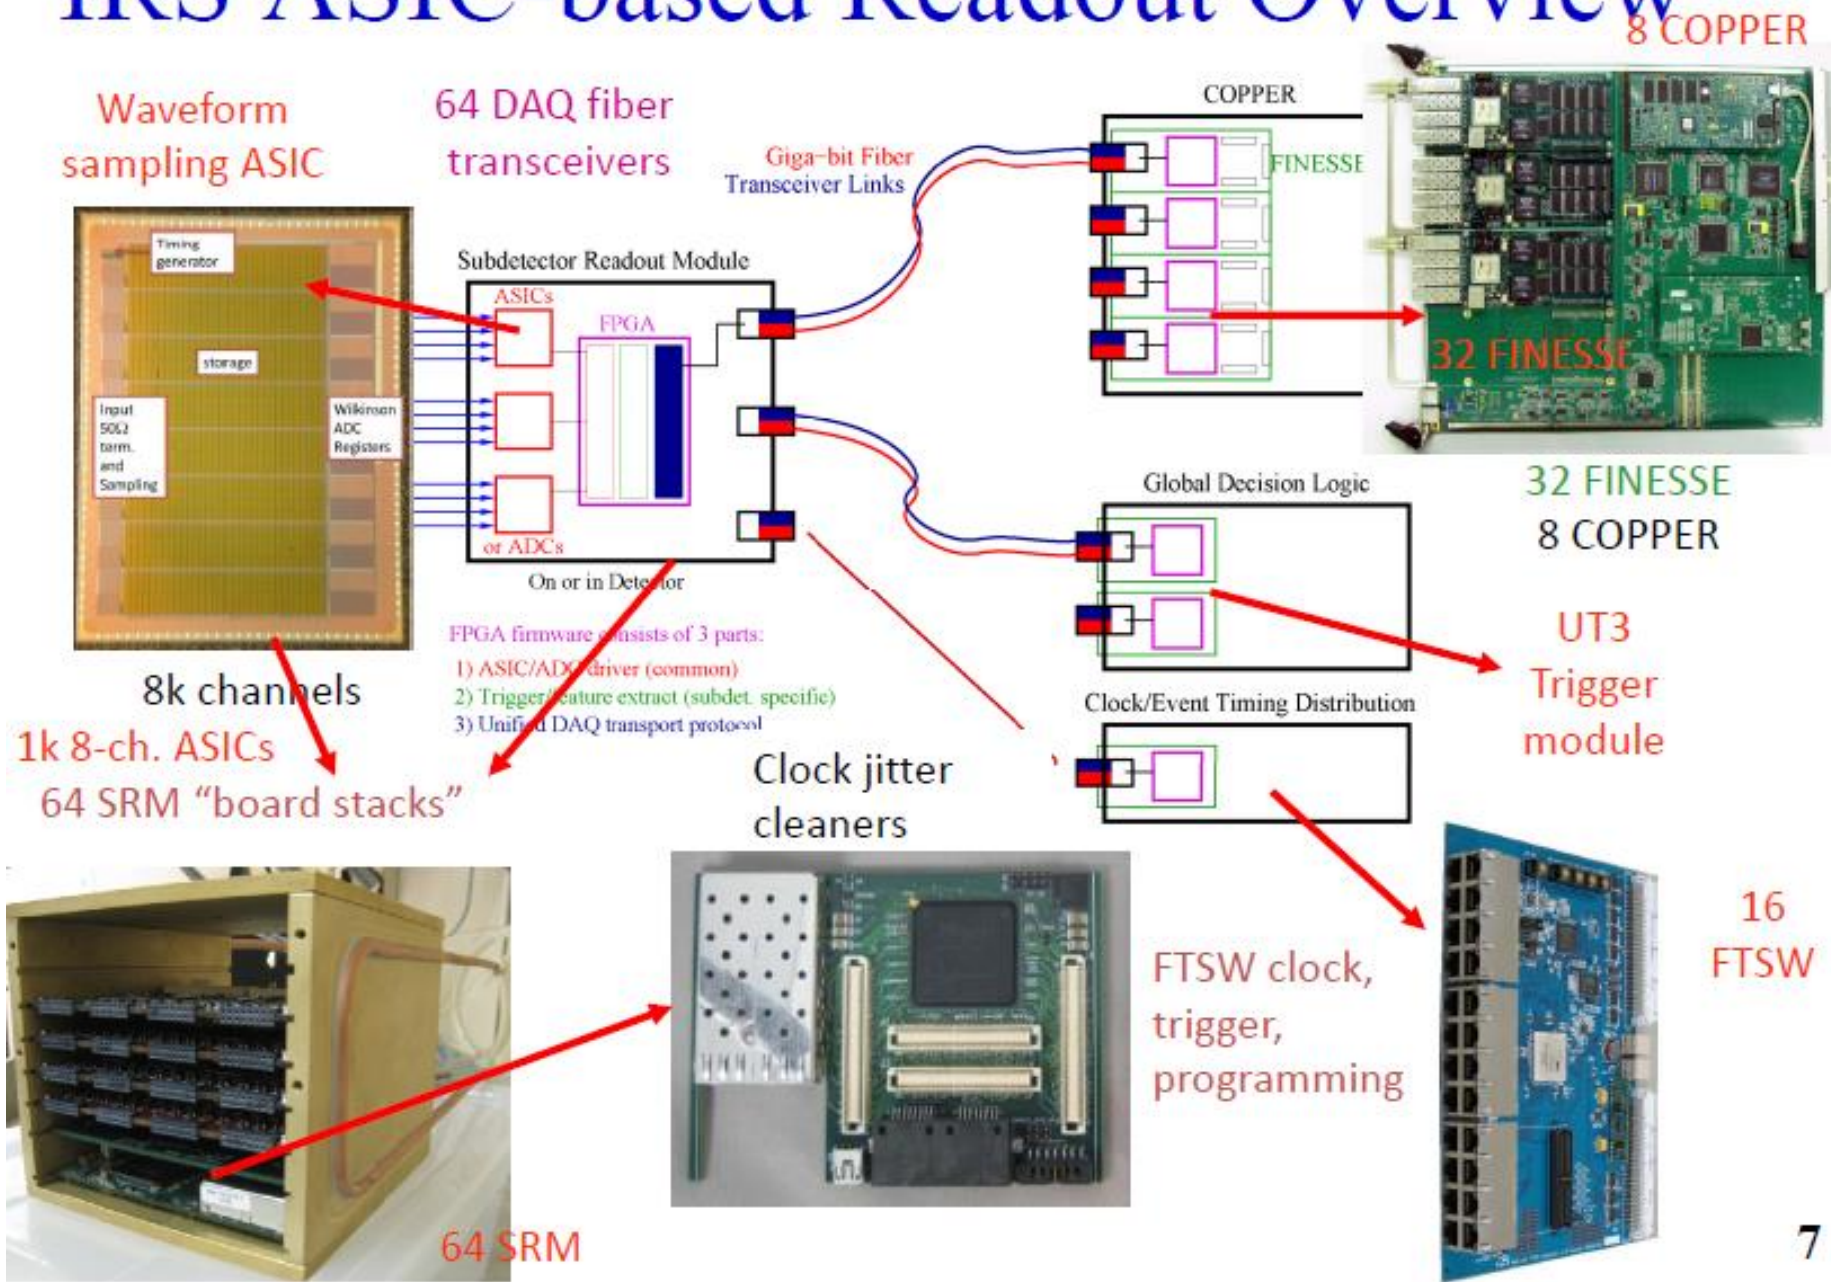


# Read-out electronics – backup for TOP performance tests

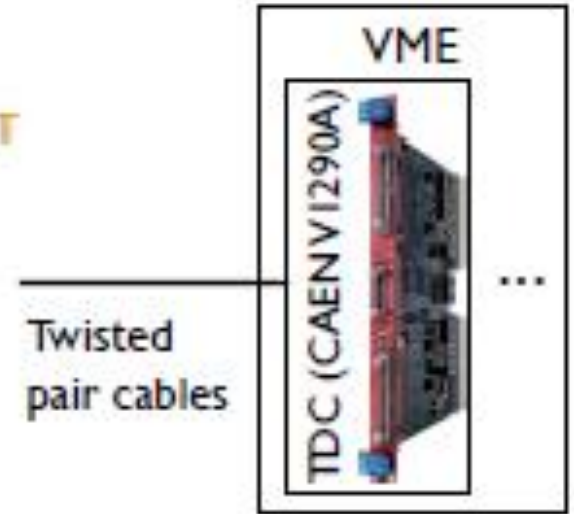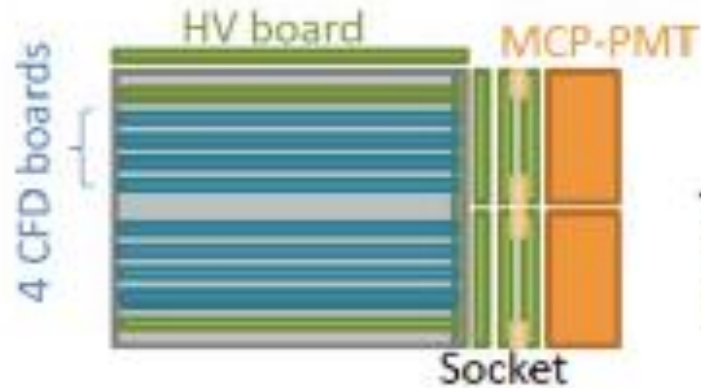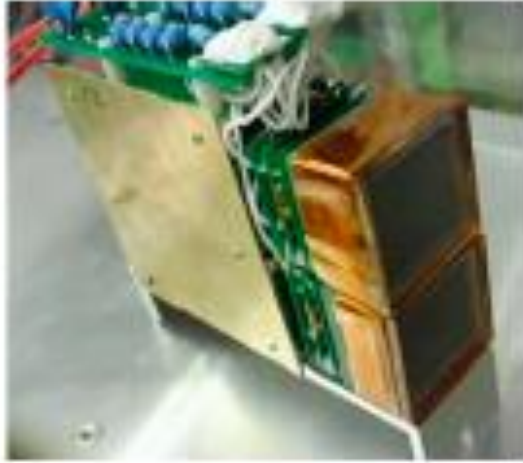

- Based on constant fraction discriminator (CFD).
- MCP-PMT 16 channels are merged into 4 at the MCP-PMT socket.
- Time resolution  $\sim 50$  psec.
- Calibration relatively simpler. Can be used for TOP performance tests

→K. Inami, RICH 2010.

# Beam test at SPRING8

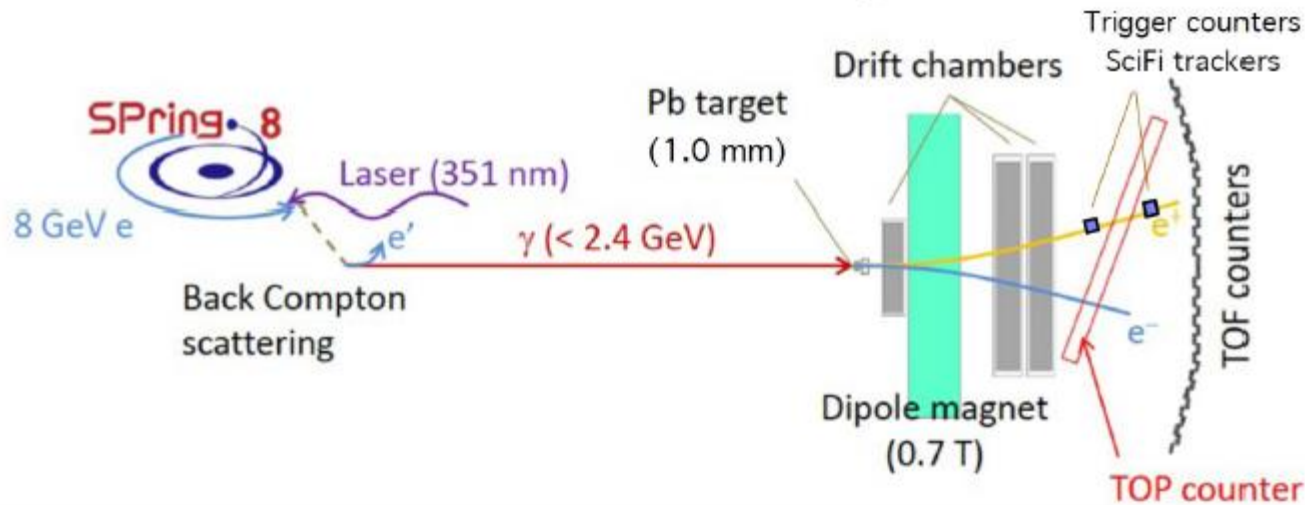



Secondary positron beam,  $\sim 2.1$  GeV

TOP prototype mounted in the LEPS spectrometer.



# TOP image

Pattern in the coordinate-time space ('ring') – different for kaons and pions.  
Recorded by the CFD-based read-out.

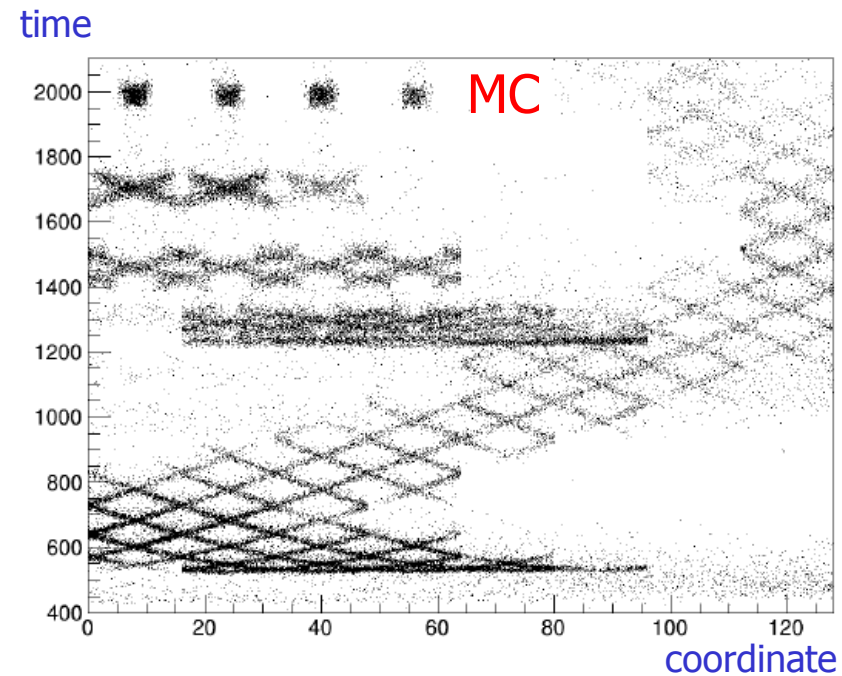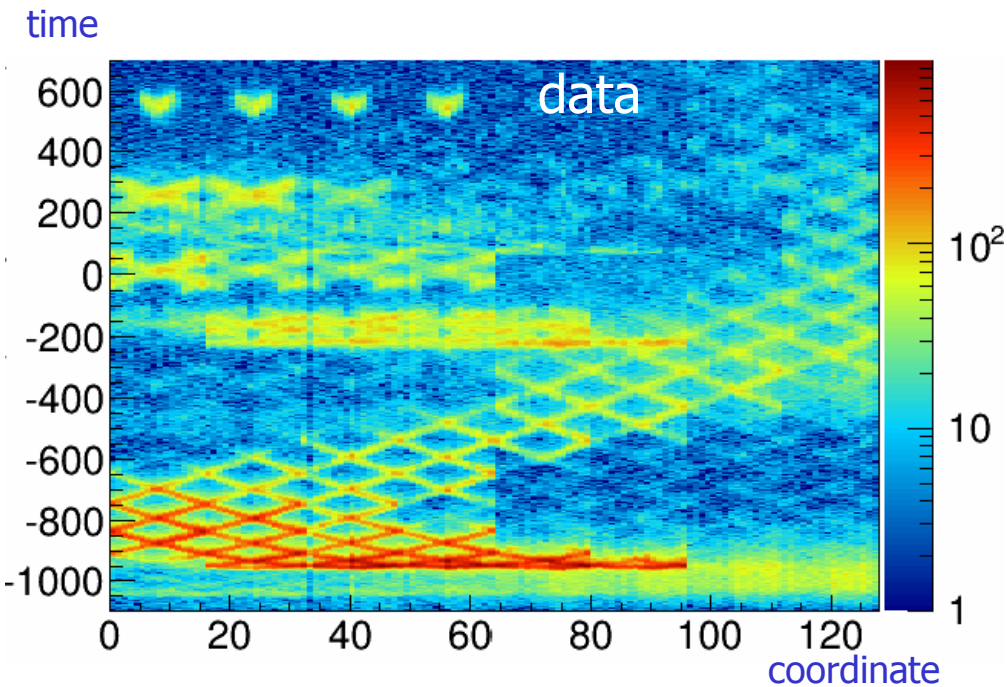


Excellent agreement between beam test data and MC simulated patterns.


→ Y. Horii, talk at EPS HEP 2013, M. Barret, talk at DPF2013

# Beam Test Event

- Single events have a mean of  $\sim 30$  Cherenkov photons detected.
  - Each waveform yields a hit time.
  - Multiple events are required in order to see a ring image.


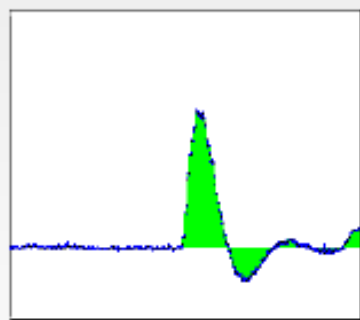


Beamtest Experiment 2 Run 568 Event 1

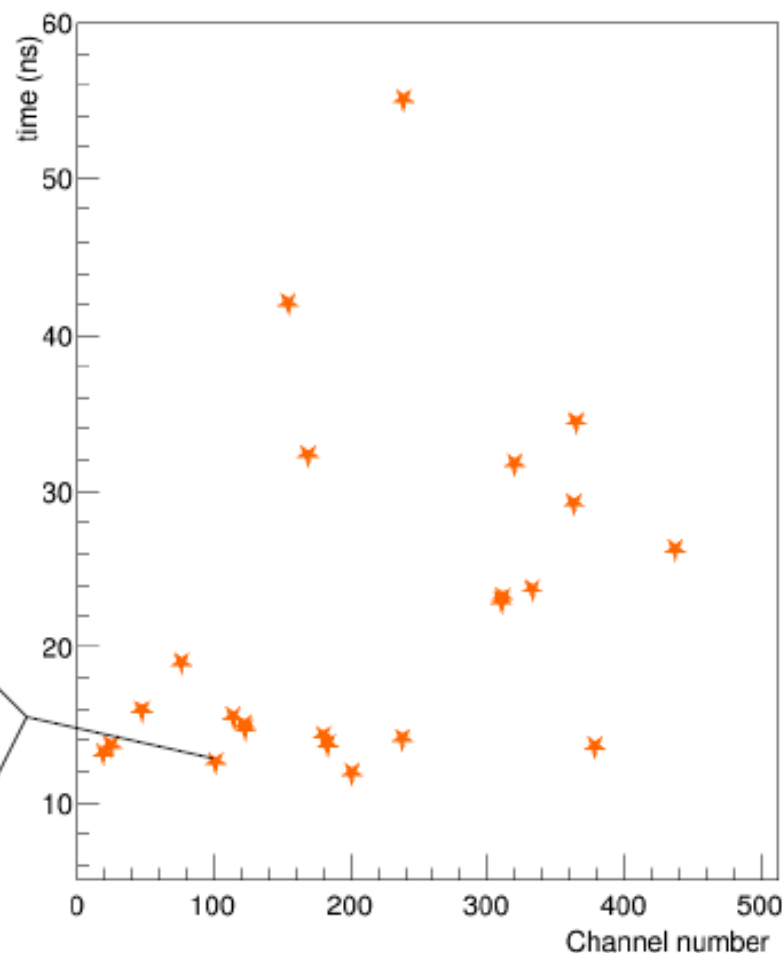

# Beam Test Event


- Single events have a mean of  $\sim 30$  Cherenkov photons detected.
  - Each waveform yields a hit time.
  - Multiple events are required in order to see a ring image.
- Greyscale image shows expected distribution from simulation.

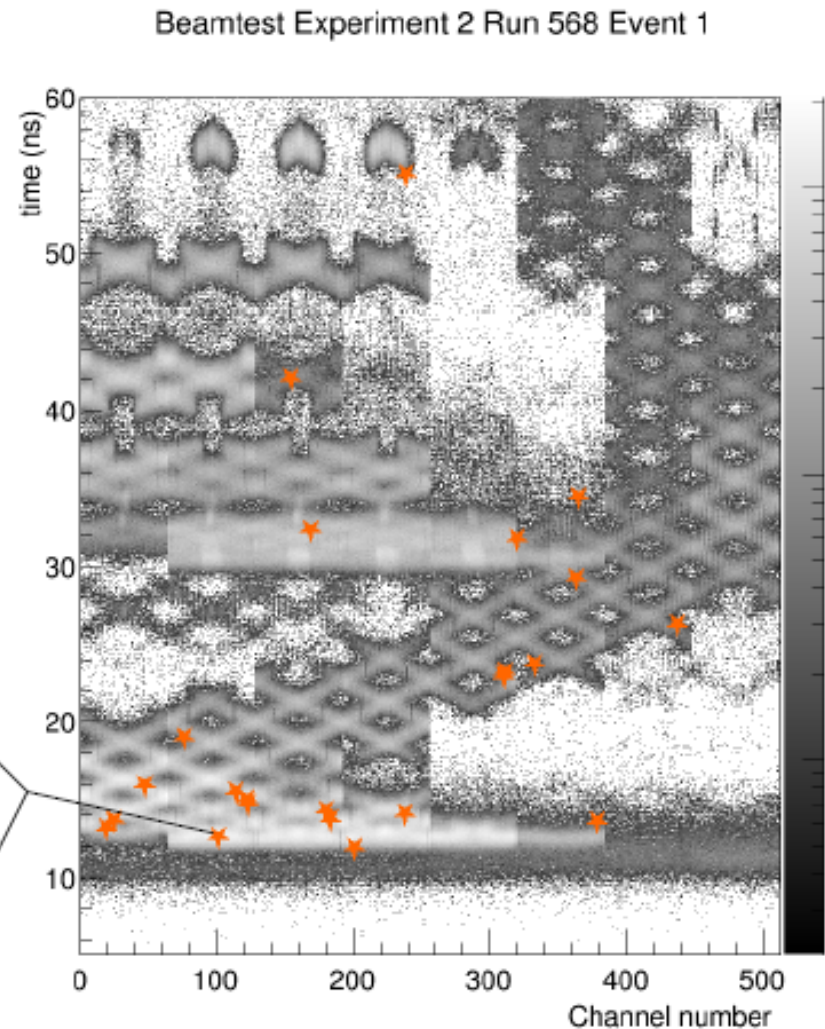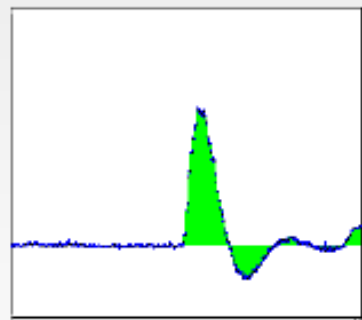

ID of the particle: from a 2D likelihood function



# Belle II PID system

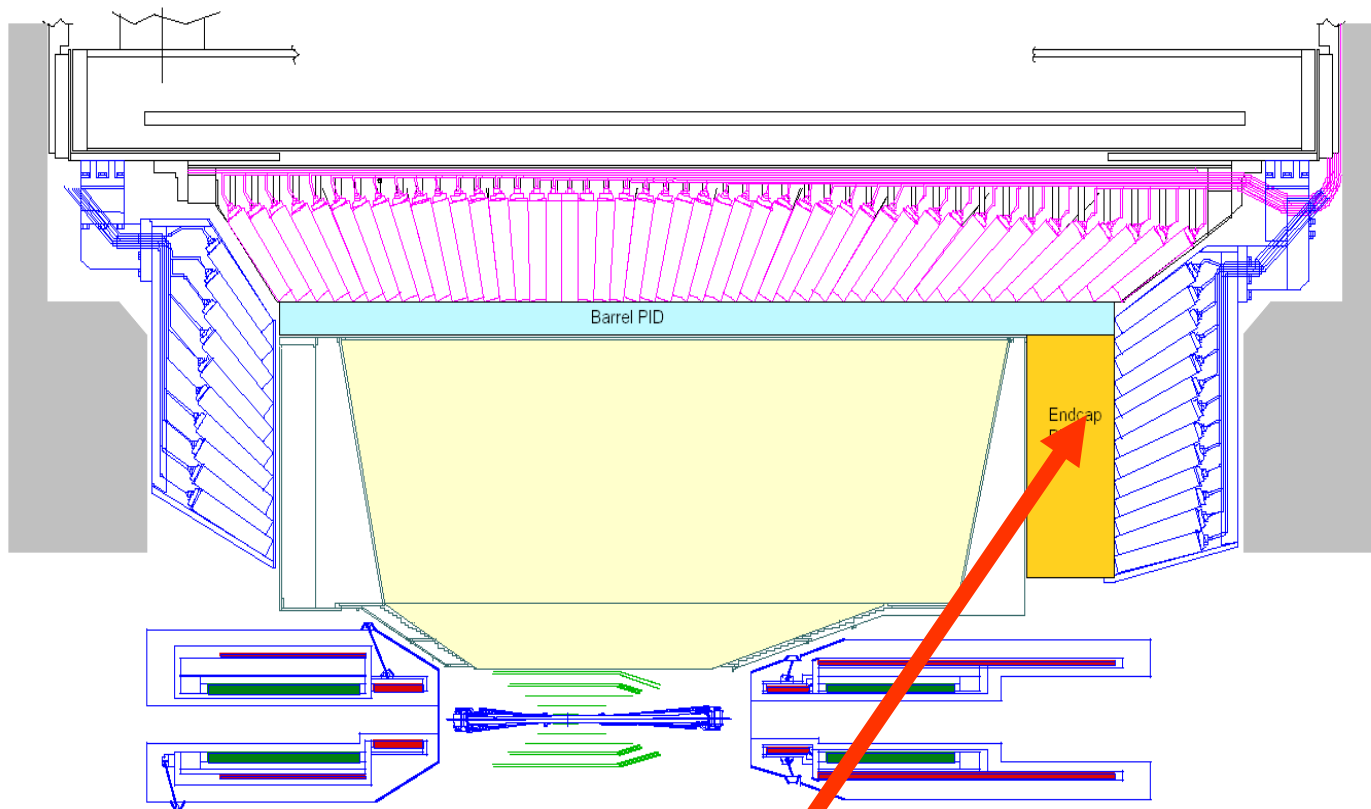

Two new particle ID devices, both RICHes:


Barrel: Time-of-propagation counter (TOP) counter

Endcap: proximity focusing RICH



# Endcap: Proximity focusing RICH

K/ $\pi$  separation at 4 GeV/c:  
 $\theta_c(\pi) \sim 308$  mrad ( $n = 1.05$ )  
 $\theta_c(\pi) - \theta_c(K) \sim 23$  mrad

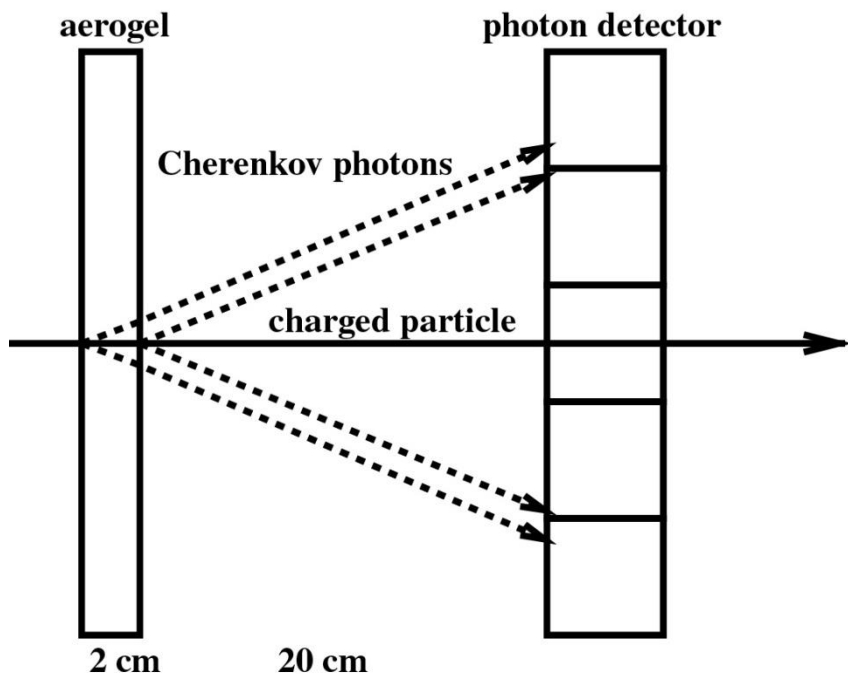

For single photons:  $\delta\theta_c(\text{meas.}) = \sigma_0 \sim 14$  mrad,  
typical value for a 20mm thick radiator and  
6mm PMT pad size

Per track:

$$\sigma_{\text{track}} = \frac{\sigma_0}{\sqrt{N_{pe}}}$$

Separation:  $[\theta_c(\pi) - \theta_c(K)] / \sigma_{\text{track}}$


$\rightarrow 5\sigma$  separation with  $N_{pe} \sim 10$

# Radiator with multiple refractive indices

How to increase the number of photons without degrading the resolution?

normal

→ stack two tiles with different refractive indices:  
“focusing” configuration



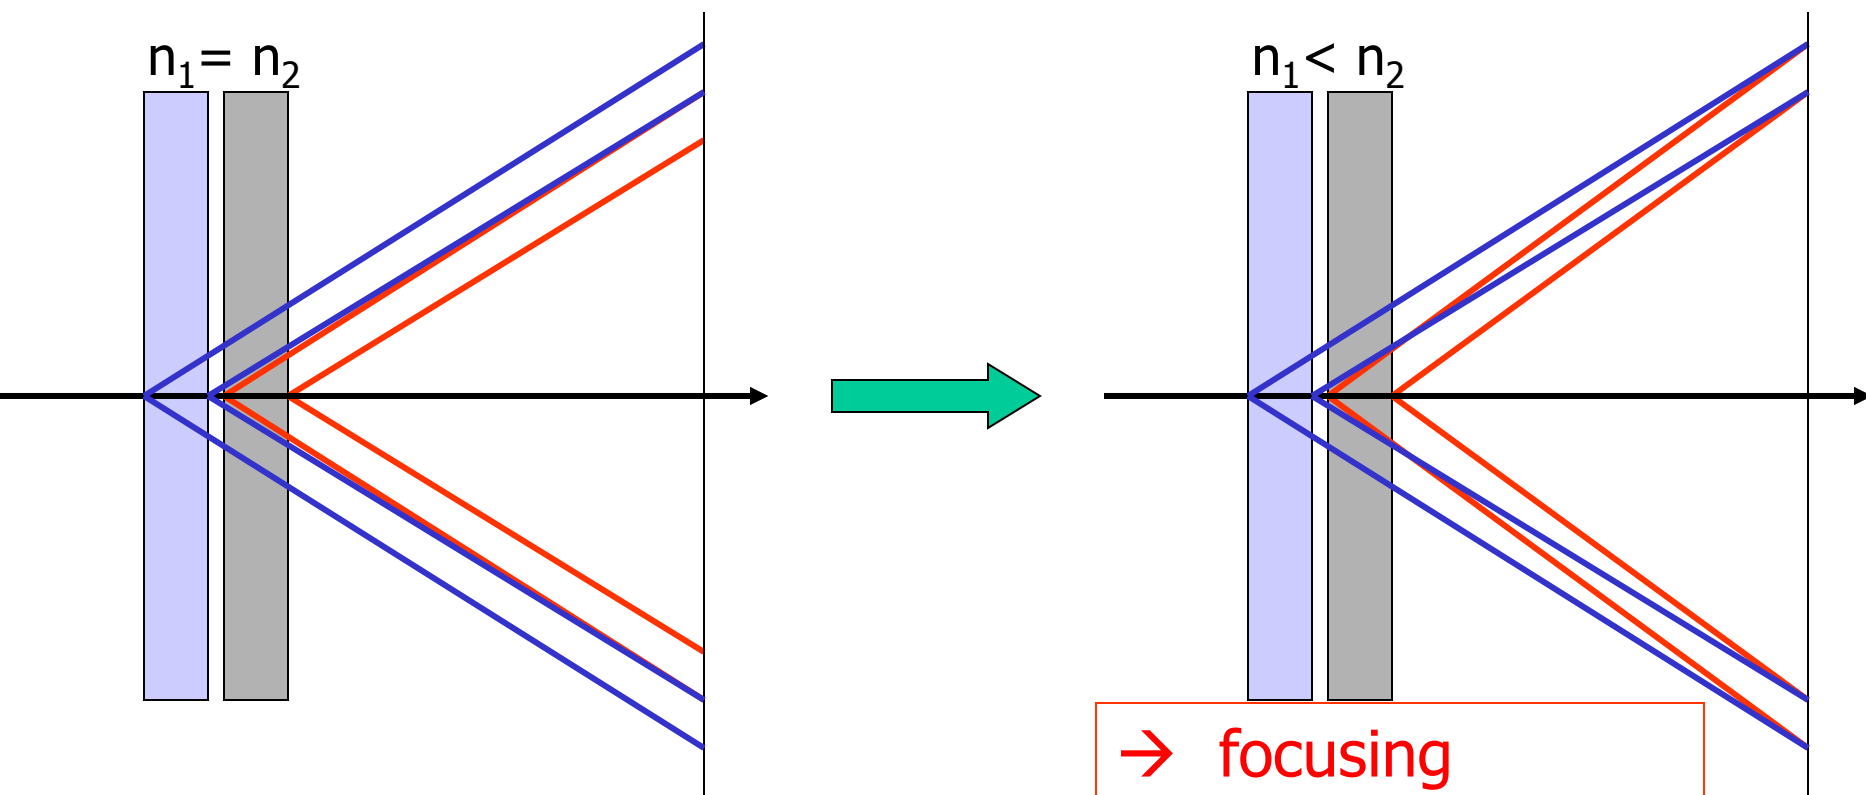


→ focusing




Such a configuration is only possible with aerogel (a form of  $\text{Si}_x\text{O}_y$ )  
– material with a tunable refractive index between 1.01 and 1.13.

# Focusing configuration – data

4cm aerogel single index

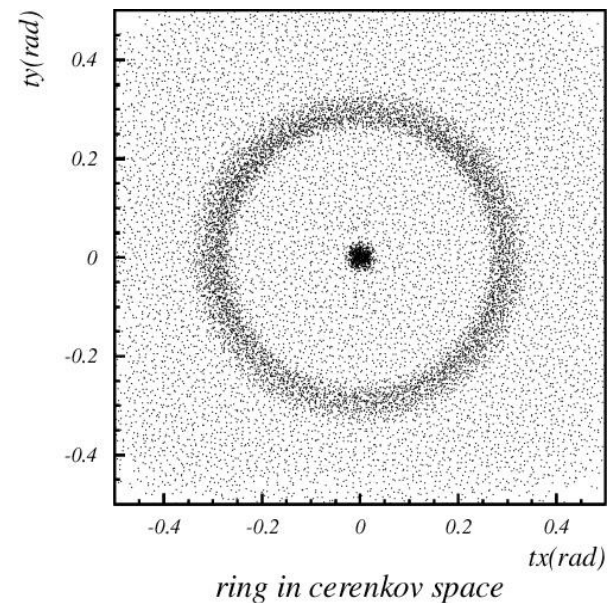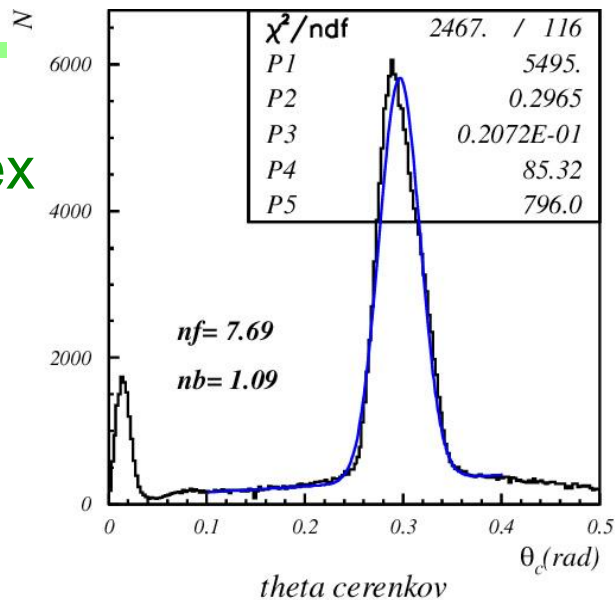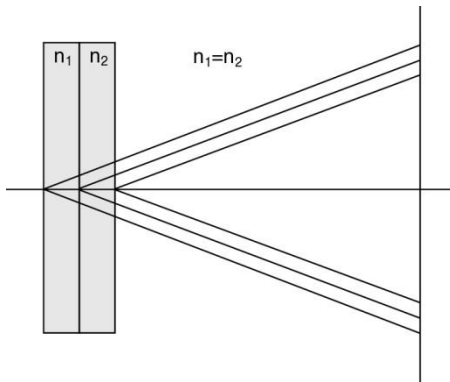

2+2cm aerogel

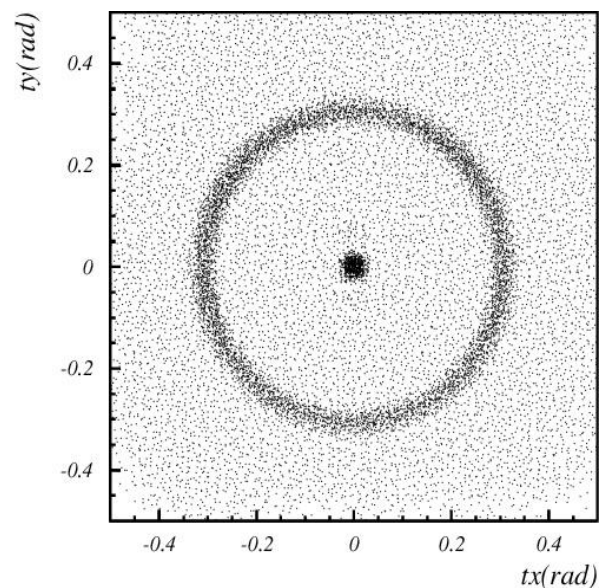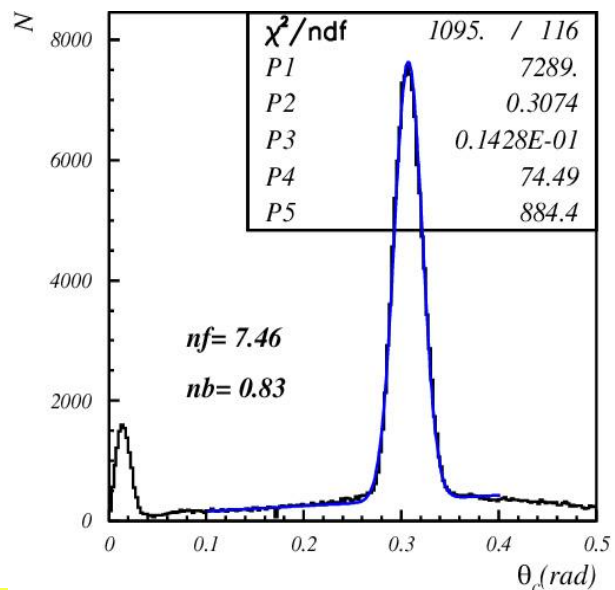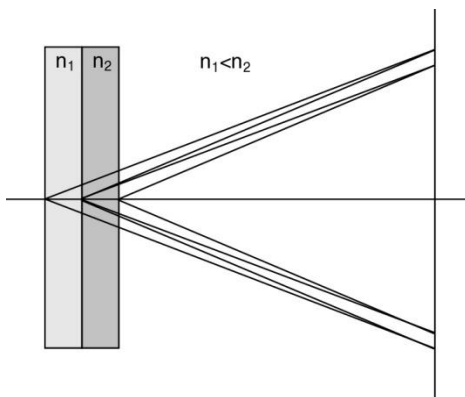



# Aerogel RICH photon detectors

Need:


Operation in 1.5 T magnetic field

Pad size  $\sim 5\text{-}6\text{mm}$

Baseline option: large active area HAPD  
of the proximity focusing type

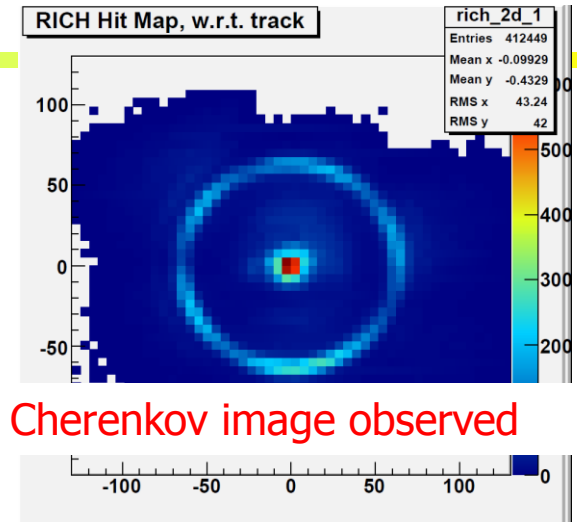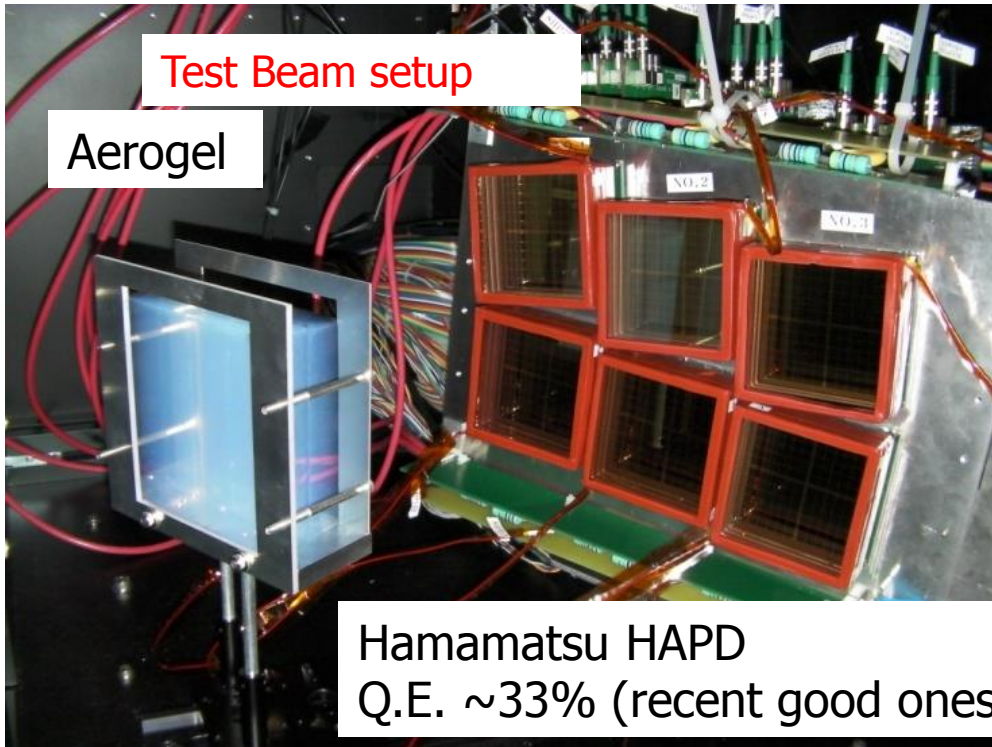

Cherenkov angle distribution

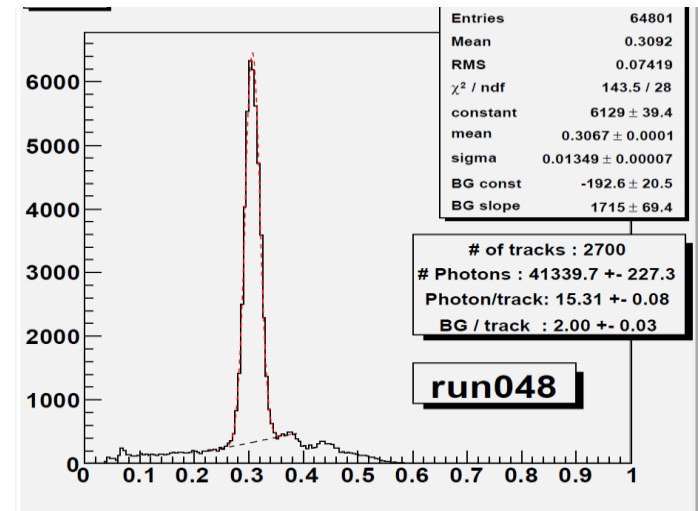

**$6.6 \sigma$  p/K at  $4\text{GeV}/c$ !**





$\rightarrow$  NIM A595 (2008) 180



# ARICH photon detector: HAPD

Hybrid avalanche photo-detector developed in cooperation with Hamamatsu (proximity focusing configuration):

- 12x12 channels ( $\sim 5 \times 5 \text{ mm}^2$ )
- size  $\sim 72 \text{ mm} \times 72 \text{ mm}$
- $\sim 65\%$  effective area
- total gain  $\sim 10^4 - 10^5$   
(bombardment  $\sim 1500$ , avalanche  $\sim 40$ )
- detector capacitance  $\sim 80 \text{ pF/ch.}$
- typical peak QE  $\sim 30\%$
- works in mag. field ( $\sim$ perpendicular to the entrance window)

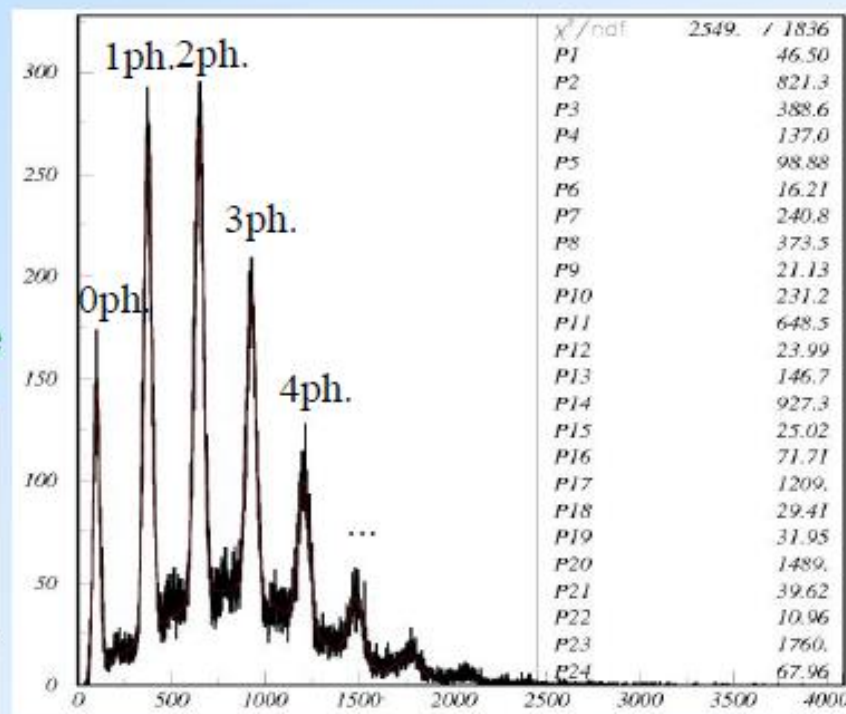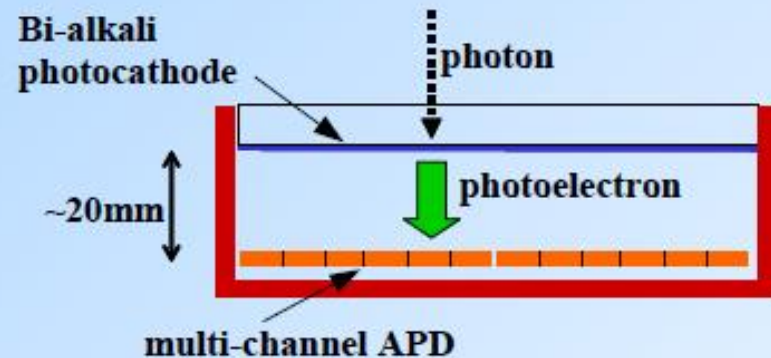
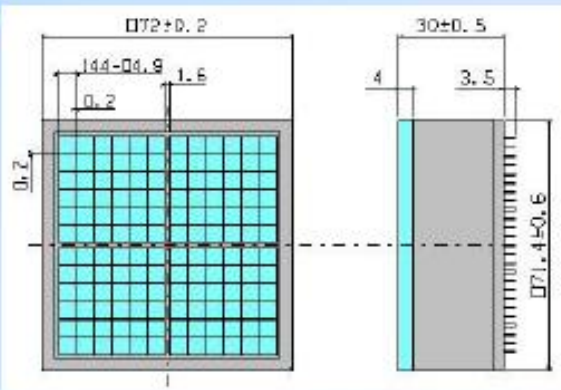
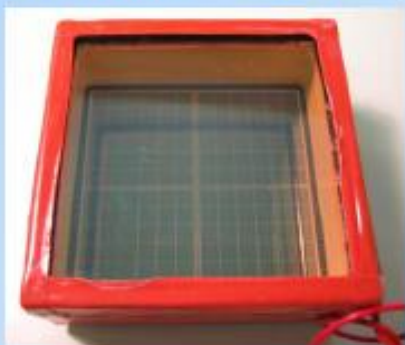


# ARICH photon detector: HAPD

Tests in 1.5 T magnetic field show improved performance:

- no photoelectron back-scattering cross-talk
- Effect of non-uniformity of electric field disappears


QE improved by Hamamatsu with super bialkali photocathode:  
25% → 32% peak

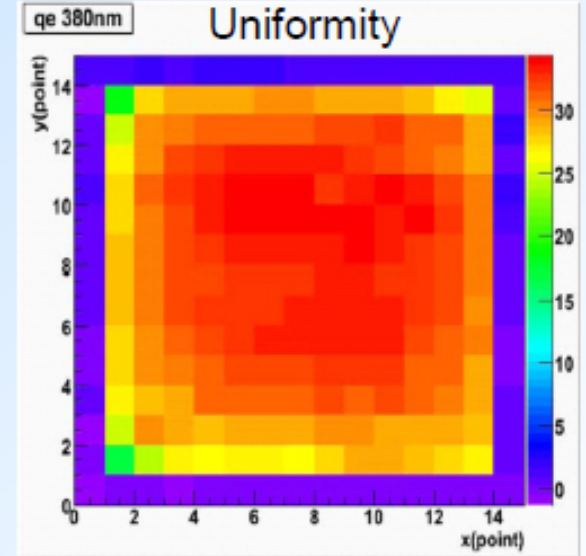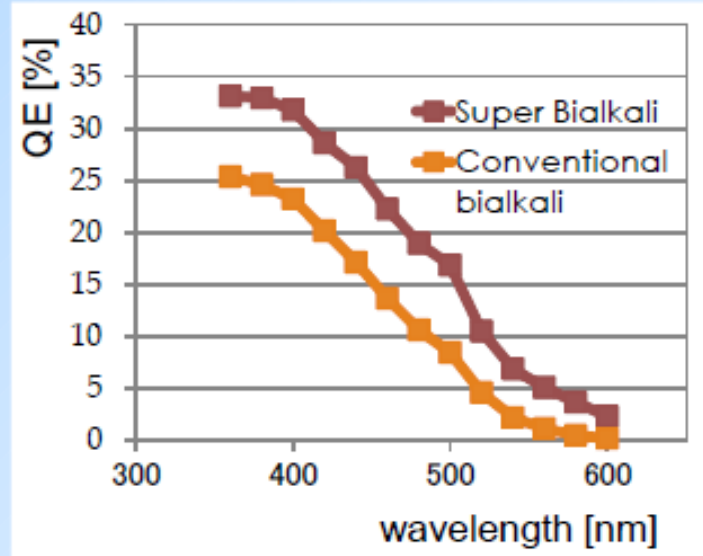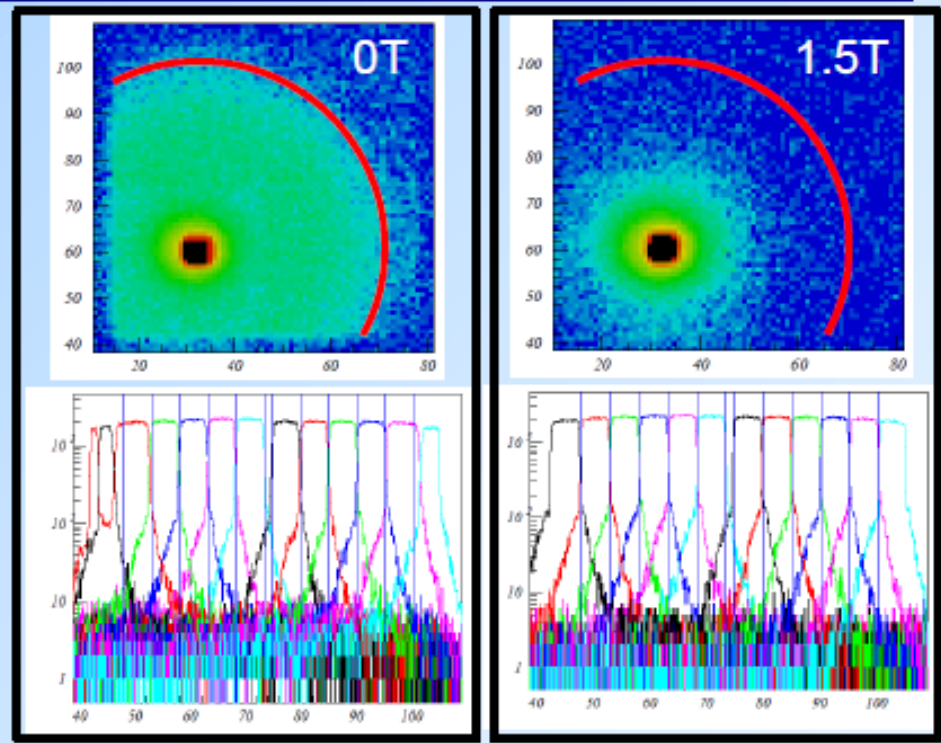

# Neutron irradiation


Reactor "Yayoi" @ Tokyo U.

- Expected total fluence  $10^{12}$  n/cm<sup>2</sup>
- First test S/N drops to 7 @  $5 \times 10^{11}$  n/cm<sup>2</sup>

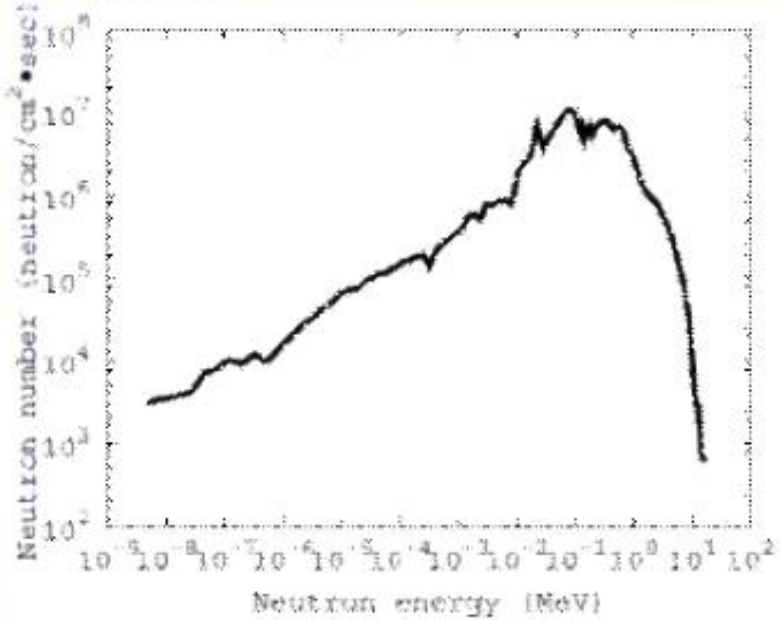

→ Expected S/N~5 @ fluence  $10^{12}$  n/cm<sup>2</sup>, marginal operation


- Re-optimization of peaking time for larger leakage currents → shorter peaking time with next ASIC version
- Optimization of APD structure

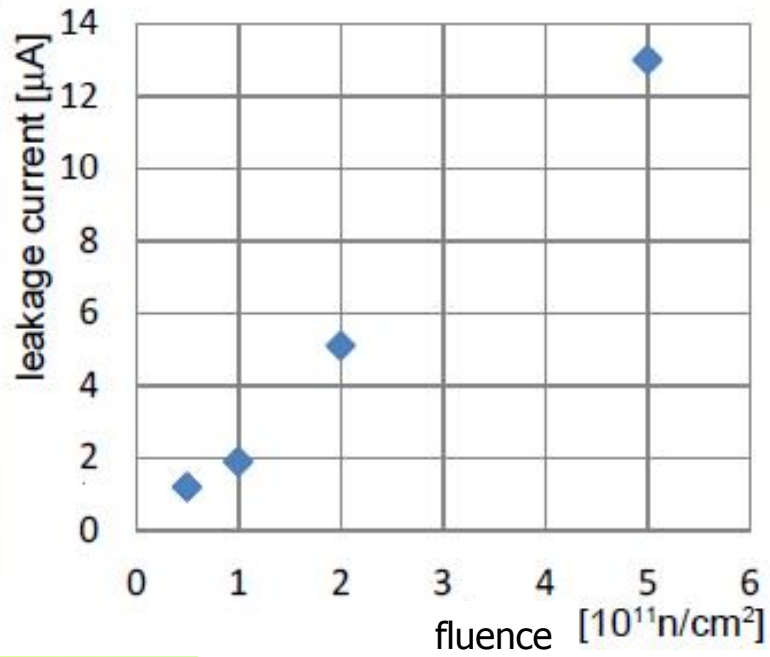


# Neutron damage

Modification of APD structure:

- Thinner p<sup>+</sup> layer to increase bombardment gain
- Thinner p layer to reduce increase of the leakage current after irradiation – main source of leakage current are thermally generated electrons in p layer due to the lattice defects produced by neutrons

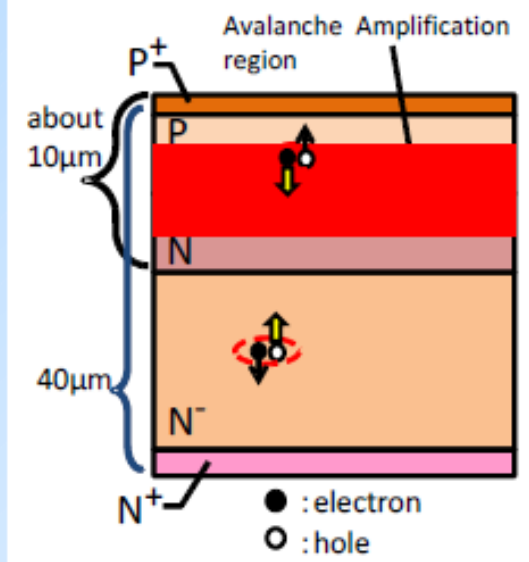


APD  $\Delta$  leakage current (@ $10^{12}n/cm^2$ )

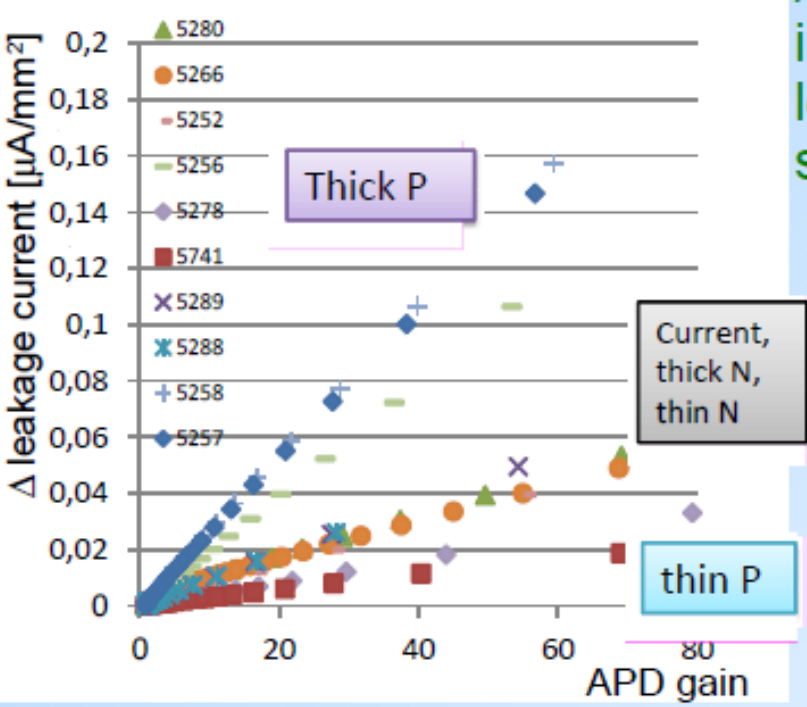

As expected the increase of the leakage current is smaller with thin p


S/N for thin p sample is better than 7 after fluence  $10^{12}n/cm^2$

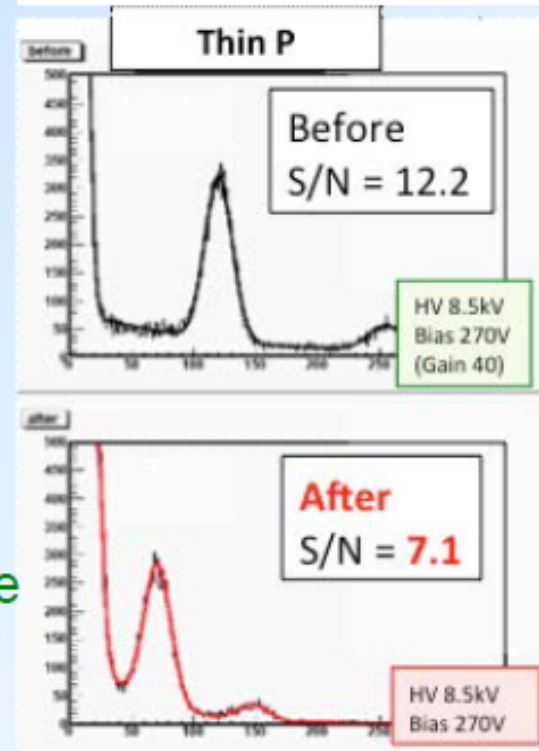

# Gamma irradiation

- Expected total dose 100-1000 Gy
- Initial tests indicated a fast raise of leakage current - not previously observed with similar APDs.
- Source (found in irradiation tests of several sample types prepared by Hamamatsu): APD for HAPD has additional alkali protection layer to protect APD during photocathode activation process → charging up
- APD structure optimized

- Standard
- alkali protection
- No alkali protection
- Optimized new alkali protection

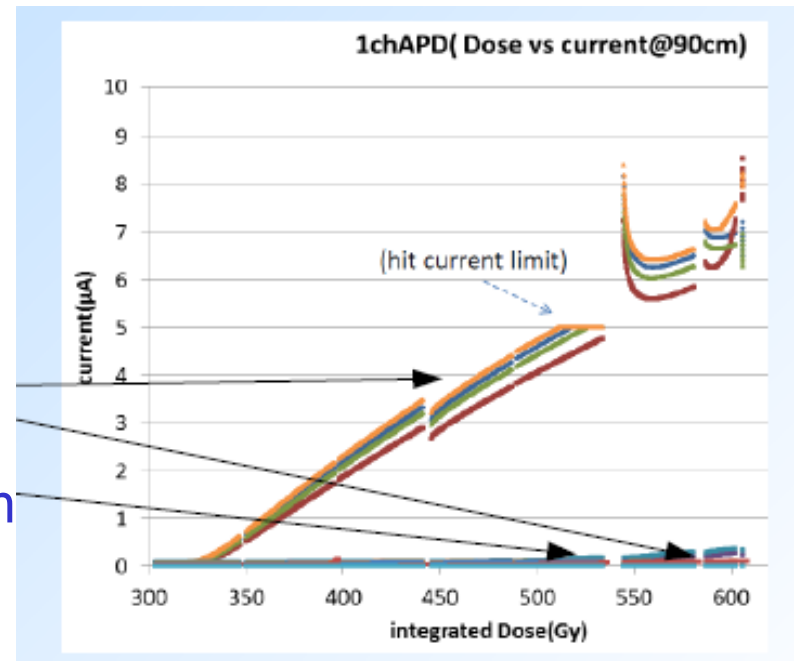


# Summary

---

- Belle II PID systems are challenging new devices, with very interesting novel features
- Most technical problems have been solved
- Finalize the design, get ready for the production with an aggressive time schedule

# Back-up slides

---

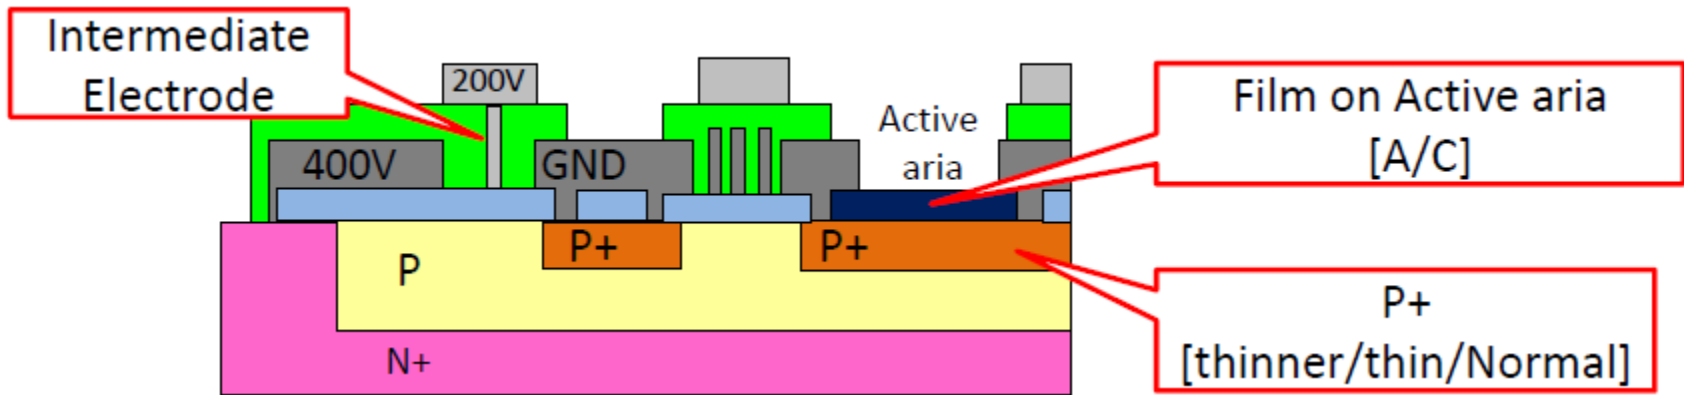



# Photon detection time vs channel number (zoom)

